Motor Controllers and MCCBs

Series KT9 Motor Circuit Controllers *F1.2*
- *Series KTA9 Base Units* *F1.4*
- *Series KTC9 Base Units* *F1.6*
- *Series KTB9 Base Units* *F1.8*
- *Series KTV9 Base Units* *F1.10*
- *Accessories* *F1.12*

Series KTU9 UL489 Molded Case Circuit Breakers *F1.30*
- *Accessories* *F1.32*
- *Technical Information & Dimensions (Online)* *F1.34*

Ecombo and EcomboPlus Starters *F1.40*
- *CLE8 / CLUE8 Ecombo Starters* *F1.42*
- *CLE7 / CLUE7 Ecombo Starters* *F1.44*
- *CLE+OL / CLUE+OL Three Component ECombo Starters* *F1.49*

Enclosed KT9 Motor Controllers & Circuit Breakers *F1.56*
- *KT9 Type-E Manual Combination Controller* *F1.57*
- *Explosion-proof KT9 Motor Controllers* *F1.63*
- *KTU9 Molded Case Circuit Breakers* *F1.65*
- *CX7 Ecombo KWIKstarters* *F1.66*
- *CX7 Combination Controllers* *F1.73*
- *CX7 Explosion-proof Controllers* *F1.78*
- *CX7 Type E/F Simplex & Duplex Pump Controllers* *F1.79*
- *Custom Multi-Starter Control Panels* *F1.82*
- *Wiring Diagrams & Dimensions (Online)* *F1.84*

Series KT5 Manual Motor Controllers *F1.89*
- *Accessories* *F1.91*
- *Technical Information & Dimensions (Online)* *F1.94*

Continued . . .

Series KT7 Motor Circuit Controllers-Discontinued *F2*
Series KTA7 Base Units *F4*
Series KTC7 Base Units *F6*
Series KTB7 Base Units *F8*
Series KTV7 Base Units *F10*
KF7 Fuse Holders *F19*
Technical Information & Dimensions (Online) *F20*

Series KTU7 UL489 Molded Case Circuit Breakers-Discontinued *F47*
Accessories *F49*
Technical Information & Dimensions (Online) *F51*

KT7 Ecombo and EcomboPlus Starters-Discontinued *F58*
CL8 / CLU8 Ecombo Starters *F60*
CL7 / CLU7 Ecombo Starters *F62*
CK7 / CKU7 EcomboPlus Starters *F66*

Enclosed KT7 Motor Controllers & Circuit Breakers - DISCONTINUED *F88*
KT7 Type-E Manual Combination Controller *F89*
Explosion-proof KT7 Motor Controllers *F93*
KTU7 Molded Case Circuit Breakers *F95*
CX7 Combination Controllers *F105*
Wiring Diagrams & Dimensions (Online) *F116*

KT4 Manual Motor Starters-Discontinued *F121*
Accessories *F123*
Technical Information & Dimensions (Online) *F127*

Series KT9 Motor Circuit Controllers

Versatile, convenient and space saving… for a variety of applications

See our online white paper

Methods of Applying KT9 Motor Circuit Controllers

Sprecher + Schuh's KT9 Series of Motor Protection Circuit Breakers (MPCBs) or Motor Protective Switching Devices (MPSDs) are UL Listed as Manual, Self-Protected Combination Motor Controllers (Type E) and Manual Motor Controllers (with approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation).

When UL/CSA Listed as Manual, Self-Protected Combination Motor Controllers, the KT9 Motor Protection Circuit Breakers provide all of the necessary NEC/CEC requirements for the protection and control of individual Motor Branch Circuits without additional branch circuit protective devices. According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

Group motor installations eliminate the need for individual branch short-circuit protective devices for each motor circuit, reducing panel space, installation and wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group". Series KT9 devices are also UL Listed for Tap Conductor protection in group installations, which helps reduce conductor sizing. According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices these devices certified for group motor installation may provide the following control and protection functions.

- Disconnect for motor branch circuit
- Overload protection (thermal protection)
- Manual switching (motor control means)

KT9s meet UL requirements for Type E manual motor controllers and "at-motor disconnects"

45mm (≈1 3/4″)

0.10…32A

Standard Interrupting Capacity

KTA9-32S

45mm (≈1 3/4″)

0.40…40A

High Interrupting Capacity

KTA/C9-40H

45mm (≈1 3/4″)

0.16…40A

High Interrupting Capacity

KTB9-40H

Series KT9 devices meet requirement of Motor Protective Switching Devices (MPSD) according to IEC 60947-4-1 and Circuit Beaker according to IEC 60947-2 standard for application outside of North America. These devices provide the following functions.

- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

KT9 devices provide Trip Class 10 overload protection and phase loss sensitivity protection. These are suitable for single- and three- phase applications. Cat. No. KTV9 devices can also be applied at the output of a variable frequency drive (VFD) in multi-motor applications.

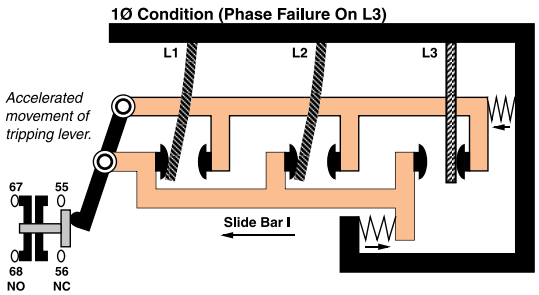

All KT9 Motor Circuit Controllers offer accelerated tripping under single phase conditions

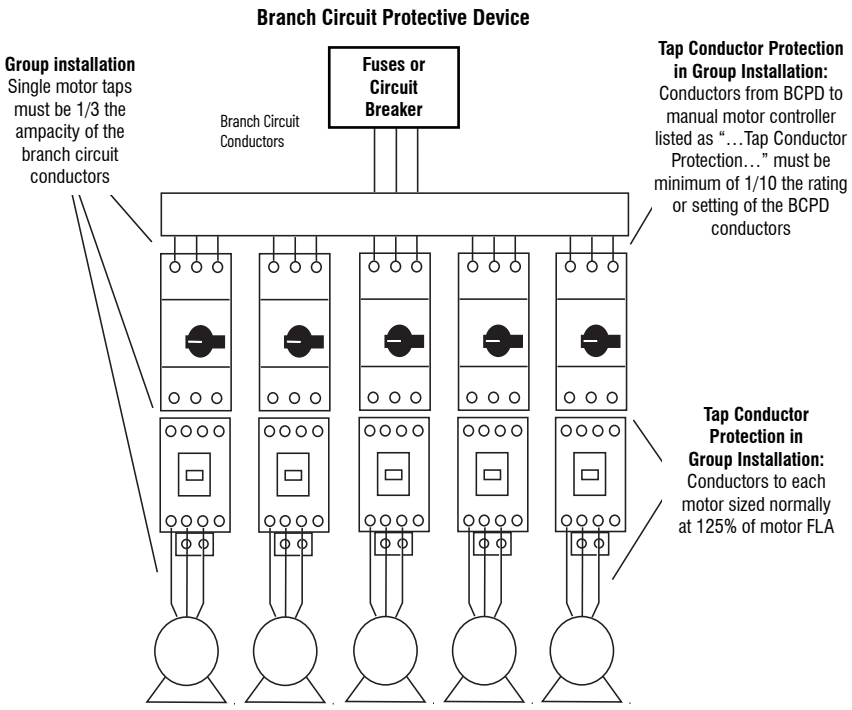

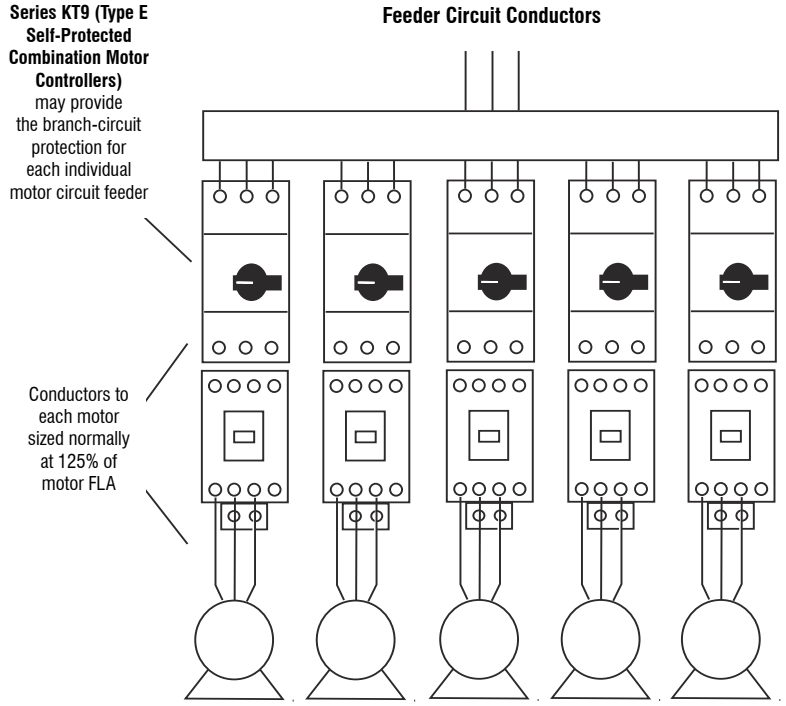

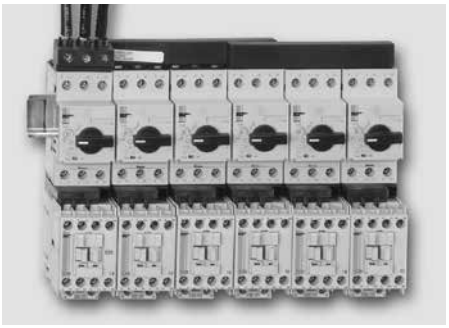

Using KT9s in Multi-Motor Starter applications can replace classic Branch Circuit Protection Devices and reduce panel space up to 60%

KTA9 Base Unit

Typical Three Phase [HP]				Current Adjustment Range [A]	Magnetic Release Response Current [A]	Catalog Number
200V	**230V**	**460V**	**575V**			
KTA9-32S Adjustable Thermal/Fixed Magnetic (14 x I_n)						
~	~	~	~	0.10...0.16	2.2	**KTA9-32S-0.16A**
~	~	~	~	0.16...0.25	3.5	**KTA9-32S-0.25A**
~	~	~	~	0.25...0.40	5.6	**KTA9-32S-0.40A**
~	~	~	~	0.40...0.63	8.8	**KTA9-32S-0.63A**
~	~	1/2	1/2	0.63...1.0	14	**KTA9-32S-1.0A**
~	~	3/4	~	1.0...1.6	22	**KTA9-32S-1.6A**
1/2	1/2	1	1-1/2	1.6...2.5	35	**KTA9-32S-2.5A**
3/4	3/4	2	3	2.5...4.0	56	**KTA9-32S-4.0A**
1	1-1/2	3	5	4.0...6.3	88	**KTA9-32S-6.3A**
2	2	5	7-1/2	6.3...10	140	**KTA9-32S-10A**
3	5	10	10	10...16	224	**KTA9-32S-16A**
5	5	10	15	14.5...20	280	**KTA9-32S-20A**
5	7-1/2	15	20	18...25	350	**KTA9-32S-25A**
7-1/2	10	20	25	23...29	406	**KTA9-32S-29A**
7-1/2	10	20	30	26.5...32	448	**KTA9-32S-32A**
KTA9-40H Adjustable Thermal/Fixed Magnetic (14 x I_n)						
~	~	~	~	0.40...0.63	8.8	**KTA9-40H-0.63A**
~	~	1/2	1/2	0.62...1.0	14	**KTA9-40H-1.0A**
~	~	3/4	~	1.0...1.6	22	**KTA9-40H-1.6A**
1/2	1/2	1	1-1/2	1.6...2.5	35	**KTA9-40H-2.5A**
3/4	3/4	2	3	2.5...4.0	56	**KTA9-40H-4.0A**
1	1-1/2	3	5	4.0...6.3	88	**KTA9-40H-6.3A**
2	2	5	7-1/2	6.3...10	140	**KTA9-40H-10A**
3	5	10	10	10...16	224	**KTA9-40H-16A**
5	5	10	15	14.5...20	280	**KTA9-40H-20A**
5	7-1/2	15	20	18...25	350	**KTA9-40H-25A**
7-1/2	10	20	25	23...29	406	**KTA9-40H-29A**
7-1/2	10	20	30	26.5...32	448	**KTA9-40H-32A**
10	10	25	30	30...36	432	**KTA9-40H-36A**
10	10	30	30	34...40	480	**KTA9-40H-40A**
KTA7-45H Adjustable Thermal/Fixed Magnetic (13 x I_n)						
2	3	5	7-1/2	6.3...10	130	**KTA7-45H-10A**
3	5	10	10	10...16	208	**KTA7-45H-16A**
5	5	10	15	14.5...20	260	**KTA7-45H-20A**
7-1/2	7-1/2	15	20	18...25	325	**KTA7-45H-25A**
7-1/2	10	20	30	23...32	416	**KTA7-45H-32A**
10	15	30	40	32...45	585	**KTA7-45H-45A**

Horsepower ratings shown in the table are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Catalog Number KTA9-32S

Catalog Number KTA9-40H

Catalog Number KTA7-45H

KTA9 UL Ratings Application Chart

Device	Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹	
	Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTA9-32S — Standard Interrupting Capacity									
KTA9-32S-0.16A	450	65	50	65	50	65	50	65	50
KTA9-32S-0.25A	450	65	50	65	50	65	50	65	50
KTA9-32S-0.40A	450	65	50	65	50	65	50	65	50
KTA9-32S-0.63A	450	65	50	65	50	65	50	65	50
KTA9-32S-1.0A	450	65	50	65	50	65	50	65	50
KTA9-32S-1.6A	450	65	50	65	50	65	50	65	50
KTA9-32S-2.5A	450	65	30	65	30	65	30	65	30
KTA9-32S-4.0A	450	65	30	65	30	65	30	65	30
KTA9-32S-6.3A	450	65	30	65	30	65	~	65	~
KTA9-32S-10A	450	65	30	65	30	65	~	65	~
KTA9-32S-16A	450	30	30	30	30	30	~	30	~
KTA9-32S-20A	450	30	30	30	10	~	~	~	~
KTA9-32S-25A	450	30	18	30	5	~	~	~	~
KTA9-32S-29A	450	30	10	10	~	~	~	~	~
KTA9-32S-32A	450	30	10	10	~	~	~	~	~
KTA9-40H — High Interrupting Capacity									
KTA9-40H-0.63A	450	65	50	65	50	65	50	65	50
KTA9-40H-1.0A	450	65	50	65	50	65	50	65	50
KTA9-40H-1.6A	450	65	50	65	50	65	50	65	50
KTA9-40H-2.5A	450	65	30	65	30	65	30	65	30
KTA9-40H-4.0A	450	65	30	65	30	65	30	65	30
KTA9-40H-6.3A	450	65	30	65	30	65	30	65	30
KTA9-40H-10A	450	65	30	65	30	65	30	65	30
KTA9-40H-16A	450	30	30	65	30	65	30	65	30
KTA9-40H-20A	450	30	30	65	30	65	~	65	~
KTA9-40H-25A	450	50	30	50	30	50	~	50	~
KTA9-40H-29A	450	50	30	50	30	50	~	50	~
KTA9-40H-32A	450	50	30	30	18	30	~	30	~
KTA9-40H-36A	450	30	30	30	18	30	~	30	~
KTA9-40H-40A	450	30	30	30	18	30	~	30	~
KTA7-45H — High Interrupting Capacity									
KTA7-45H-10A	600	65	30	65	30	65	30	65	30
KTA7-45H-16A	600	65	30	65	30	65	30	65	30
KTA7-45H-20A	600	65	30	65	30	65	30	65	30
KTA7-45H-25A	600	65	30	65	30	65	30	65	30
KTA7-45H-32A	600	65	30	65	30	65	30	65	30
KTA7-45H-45A	600	65	18	65	18	65	~	65	~

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT9/7-xx-TE terminal adaptor on KT9s and KT7s. Alternatively, the selection of a KT9/7 compact busbar supply block meet Type E requirements for terminal spacing.

It should be noted that the KT9/7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTC9 Base Unit

Maximum Horsepower				Current Adjustment Range [A]	Magnetic Release Response Current [A]	Catalog Number
Typical Three Phase [HP]						
200V	230V	460V	575V			
KTC9-40H – High Interrupting Capacity						
~	~	~	~	0.10...0.16	3.2	**KTC9-40H-0.16A**
~	~	~	~	0.16...0.25	5.5	**KTC9-40H-0.25A**
~	~	~	~	0.25...0.40	8.8	**KTC9-40H-0.40A**
~	~	~	~	0.40...0.63	14	**KTC9-40H-0.63A**
~	~	1/2	1/2	0.63...1.0	22	**KTC9-40H-1.0A**
~	~	3/4	~	1.0...1.6	35	**KTC9-40H-1.6A**
1/2	1/2	1	1-1/2	1.6...2.5	55	**KTC9-40H-2.5A**
3/4	3/4	2	3	2.5...4	88	**KTC9-40H-4.0A**
1	1-1/2	3	5	4...6.3	139	**KTC9-40H-6.3A**
2	2	5	7-1/2	6.3...10	220	**KTC9-40H-10A**
3	5	10	10	10...16	320	**KTC9-40H-16A**
5	5	10	15	14.5...2	400	**KTC9-40H-20A**
5	7-1/2	15	20	18...25	450	**KTC9-40H-25A**
KTC7-45H — High Interrupting Capacity						
7-1/2	7-1/2	15	20	18...25	416	**KTC7-45H-25A**
7-1/2	10	20	30	23...32	585	**KTC7-45H-32A**

Horsepower ratings shown in the table are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTC9-40H-4.0A.

KTC9-40H

Description

The KTC9 has a fixed magnetic trip set at 18…22x the maximum value of the current adjustment range (as opposed to the KTA9s magnetic trip of approximately 14x adjustment range.) KTC9 are typically used in applications where nuisance tripping might occur, as with some high efficiency motors.

KTC9 UL Ratings Application Chart

Device	Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹	
	Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTC9-40H — High Interrupting Capacity									
KTC9-40H-0.16A	450	65	50	65	50	65	47	65	50
KTC9-40H-0.25A	450	65	50	65	50	65	47	65	50
KTC9-40H-0.40A	450	65	50	65	50	65	47	65	50
KTC9-40H-0.63A	450	65	50	65	50	65	47	65	50
KTC9-40H-1.0A	450	65	50	65	50	65	47	65	50
KTC9-40H-1.6A	450	65	50	65	50	65	30	65	50
KTC9-40H-2.5A	450	65	30	65	30	65	30	65	30
KTC9-40H-4.0A	450	65	30	65	30	65	30	65	30
KTC9-40H-6.3A	450	65	30	65	30	65	30	65	30
KTC9-40H-10A	450	65	30	65	30	65	30	65	30
KTC9-40H-16A	450	65	30	65	18	65	30	65	~
KTC9-40H-20A	450	65	30	65	30	65	~	65	~
KTC9-40H-25A	450	50	30	50	30	50	~	50	~
KTC7-45H — High Interrupting Capacity									
KTC7-45H-25A	600	65	30	65	30	65	30	65	30
KTC7-45H-32A	600	65	18	65	18	65	18	65	18

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT9/7-xx-TE terminal adaptor on KT9s and KT7s. Alternatively, the selection of a KT9/7 compact busbar supply block meet Type E requirements for terminal spacing.

It should be noted that the KT9/7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTB9 Base Unit ❷

Maximum Horsepower Typical Three Phase [HP]				❶ Rated Operational Current [A]	Magnetic Release Response Current [A]	Catalog Number
200V	230V	460V	575V			
KTB9-40H – High Interrupting Capacity						
~	~	~	~	0.16	2.2	**KTB9-40H-0.16A**
~	~	~	~	0.25	3.5	**KTB9-40H-0.25A**
~	~	~	~	0.40	5.6	**KTB9-40H-0.40A**
~	~	~	~	0.63	8.8	**KTB9-40H-0.63A**
~	~	1/2	1/2	1.0	14	**KTB9-40H-1.0A**
~	~	3/4	~	1.6	22	**KTB9-40H-1.6A**
1/2	1/2	1	1-1/2	2.5	35	**KTB9-40H-2.5A**
3/4	3/4	2	3	4	52	**KTB9-40H-4.0A**
1	1-1/2	3	5	6.3	88	**KTB9-40H-6.3A**
2	2	5	7-1/2	10	130	**KTB9-40H-10A**
3	5	10	10	16	208	**KTB9-40H-16A**
5	5	10	15	20	280	**KTB9-40H-20A**
5	7-1/2	15	20	25	325	**KTB9-40H-25A**
7-1/2	10	20	25	29	406	**KTB9-40H-29A**
7-1/2	10	20	30	32	448	**KTB9-40H-32A**
10	10	25	30	36	432	**KTB9-40H-36A**
10	10	30	30	40	480	**KTB9-40H-40A**
KTB7-45H — High Interrupting Capacity						
7-1/2	10	20	25	25	325	**KTB7-45H-25A**
7-1/2	10	25	30	32	416	**KTB7-45H-32A**
10	15	30	40	45	585	**KTB7-45H-45A**

KTB9-40H

Description

The KTB9 is designed without a thermal trip element (i.e., current adjustment range). It should be selected for applications where a separate motor overload protection device is used, such as on CLE7 Three Component Starters on page F76. Magnetic trip is approximately 14x operational current for the KTB9 (approximately 13x for the KTB7).

❶ APPLICATION NOTE: Product Selection for Heavy Duty Starting Applications using KTB9-40H and KTB7-45H Motor Circuit Controllers

The KTB9 / KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7 overload relay with selectable trip class should be used to protect the motor against overload.

In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB9 / KTB7 Motor Circuit Controller KTB9-40H and KTB7-45H.

Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.00 CLASS 15 = 1.22 CLASS 20 = 1.42
CLASS 25 = 1.58 CLASS 30 = 1.73
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB9 / KTB7.

Application Example:
Motor 480 VAC, 10 HP, Ie 14 FLA
Heavy duty starting application with start time of up to 18 seconds

Solution:
Starting time up to 18 seconds requires dimensioning for CLASS 20.
- Selection of the Motor Circuit Controller for Short Circuit Protection: Multiply the rated operational current I_e with factor for CLASS 20: $I_e(20) = 14\ A \times 1.42 = 19.9\ A$
- Select corresponding Sprecher + Schuh KTB9-40H or KTB7-45H from catalog using next higher current rating: KTB9-40H-25A

❷ Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – (4.2A x 0.9 = 3.78A). Select Catalog Number KTB9-40H-4.0A.

KTB9 UL Ratings Application Chart

Device	Manual Controller for Group Installation			Manual Controller as Motor Disconnect		Suitable for Tap Conductor Protection	
	Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
		480V	600V	480V	600V	480Y/277V ❶	600Y/347V ❶
KTB9-40H — High Interrupting Capacity							
KTB9-40H-0.16A	450	65	50	65	50	65	50
KTB9-40H-0.25A	450	65	50	65	50	65	50
KTB9-40H-0.40A	450	65	50	65	50	65	50
KTB9-40H-0.63A	450	65	50	65	50	65	50
KTB9-40H-1.0A	450	65	50	65	50	65	50
KTB9-40H-1.6A	450	65	50	65	50	65	50
KTB9-40H-2.5A	450	65	30	65	30	65	30
KTB9-40H-4.0A	450	65	30	65	30	65	30
KTB9-40H-6.3A	450	65	30	65	30	65	30
KTB9-40H-10A	450	65	30	65	30	65	30
KTB9-40H-16A	450	65	30	65	30	65	30
KTB9-40H-20A	450	65	30	65	30	65	~
KTB9-40H-25A	450	50	30	50	30	50	~
KTB9-40H-29A	450	50	30	50	30	50	~
KTB9-40H-32A	450	50	30	30	18	30	~
KTB9-40H-36A ❷	450	30	30	30	18	30	~
KTB9-40H-40A ❷	450	30	30	30	18	30	~
KTB7-45H — High Interrupting Capacity							
KTB7-45H-25A	600	65	30	65	30	~	~
KTB7-45H-32A	600	65	30	65	30	~	~
KTB7-45H-45A	600	65	18	65	18	~	~

❶ For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.
❷ Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

KTV9 Base Unit

Rated Operational Current (I_e)	Current Adjustment Range [A]	Nominal Magnetic Trip Current	Maximum Short Circuit Current [kA]		Maximum Horsepower Typical ❶❷ Three Phase [HP]				Catalog Number
[A]	[A]	[A]	480Y/277V Type E	480V (group motor)	200V	230V	460V	575V	
KTV9-40H – High Interrupting Capacity									
1.6	1.0…1.6	88	65	65	~	~	3/4	~	**KTV9-40H-1.6A**
2.5	1.6...2.5	88	65	65	1/2	1/2	1	~	**KTV9-40H-2.5A**
4.0	2.5...4.0	88	65	65	3/4	3/4	2	~	**KTV9-40H-4.0A**
6.3	4.0...6.3	88	65	65	1	1-1/2	3	~	**KTV9-40H-6.3A**
10	6.3...10	140	65	65	2	2	5	~	**KTV9-40H-10A**
16	10...16	224	65	65	3	5	10	~	**KTV9-40H-16A**
20	14.5...20	280	65	65	5	5	10	~	**KTV9-40H-20A**
25	18...25	350	50	50	5	7-1/2	15	~	**KTV9-40H-25A**
29	23...29	406	50	50	7-1/2	10	20	~	**KTV9-40H-29A**
32	26.5...32	448	30	50	7-1/2	10	20	~	**KTV9-40H-32A**
36	30...36	432	30	30	10	10	25	~	**KTV9-40H-36A ❸**
40	34...40	480	30	30	10	10	30	~	**KTV9-40H-40A ❸**

KTV9-40H

Description

The Sprecher+Schuh KTV9 series motor controllers are suitable for two types of applications under cULus listings:

(1) as a Manual, Self-protected Motor Controller or

(2) as a Manual Motor Controller with approval for group installation (and as a motor disconnect)

When UL/CSA listed as a manual, self-protected combination motor controller, the KTV9 provides all of the necessary NEC requirements for protection and control of individual motor branch circuits without additional protective devices (per NEC 430-52C option 6).

When KTV9 devices are applied a manual motor controllers in group installations, then NEC group installation rules state these devices must be applied per the appropriate rules, which require the use of an upstream BCPD-branch circuit protection device (per NEC 430-53C option 2).

The output frequency of the VFD must be limited to 400Hz or less to prevent thermal degradation. Various models of the KTV9 series self-protected combination motor controllers provide disconnection for motor branch circuits, branch-circuit and short-circuit protection (including magnetic protection), overload/thermal protection and manual switching.

The KTV9 self-protected combination motor controllers are current limiting and have a fixed magnetic trip. Interrupt ratings at 400V and 480V are available up to 65KaIC. The VFD output pulse-width modulation frequency must be limited to 4 kilohertz or less. The circuit breakers provide motor overload protection with a trip class 10 characteristic.

Horsepower ratings shown in the table are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTV9-40H-4.0A.

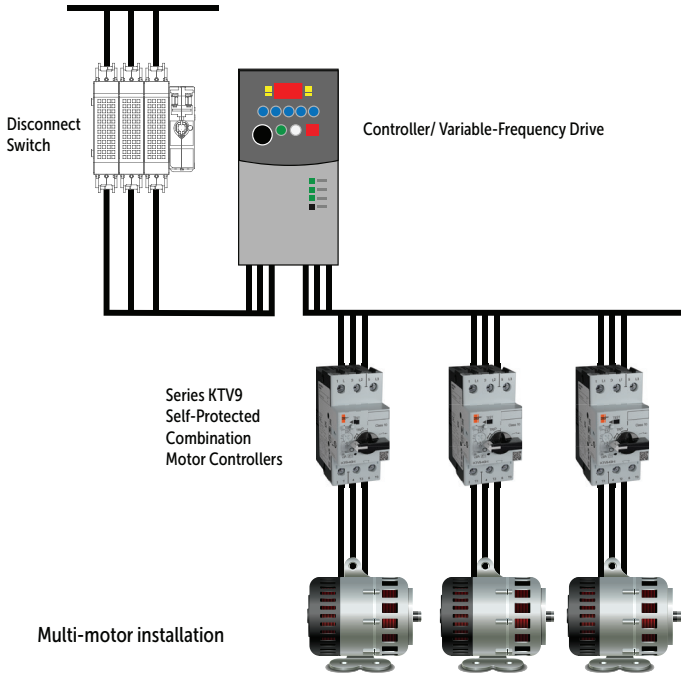

❶ HP ratings shown are for reference. Final selection of MPCB is determined by actual motor full load current.
❷ Not applicable at 575V.
❸ Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150mm (10 x 7 x 6 in.)

KTV9 UL Ratings Application Chart

Device	Manual Controller for Group Installation			Manual Controller as Motor Disconnect		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller	
	Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
		480V	600V	480V	600V	480Y/277V ❶	600Y/347V ❶	480Y/277V ❶	600Y/347V ❶
KTV9-40H — High Interrupting Capacity									
KTV9-40H-1.6A	450	65	~	65	~	65	~	65	~
KTV9-40H-2.5A	450	65	~	65	~	65	~	65	~
KTV9-40H-4.0A	450	65	~	65	~	65	~	65	~
KTV9-40H-6.3A	450	65	~	65	~	65	~	65	~
KTV9-40H-10A	450	65	~	65	~	65	~	65	~
KTV9-40H-16A	450	65	~	65	~	65	~	65	~
KTV9-40H-20A	450	65	~	65	~	65	~	65	~
KTV9-40H-25A	450	50	~	50	~	50	~	50	~
KTV9-40H-29A	450	50	~	50	~	50	~	50	~
KTV9-40H-32A	450	50	~	30	~	30	~	30	~
KTV9-40H-36A ❷	450	30	~	30	~	30	~	30	~
KTV9-40H-40A ❷	450	30	~	30	~	30	~	30	~

❶ For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.
❷ Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Accessories for KT9

Accessory	Description	Operator Position ❶ OFF	Operator Position ❶ ON	Operator Position ❶ Tripped	Term. No.	Type	Connection Diagram and Terminal Markings ❷	For Use With	Catalog Number
	Front-Mounted Auxiliary Contact • 1-pole or 2-pole • No additional space required • Only one per device. • KT9-PE1...250V max. • KT7-PE1...300V max.	0	X	0	13-14	1 NO		KT_9-32S KT_9-40H KTU9	**KT9-PE1-10**
								KT_7-45H	**KT7-PE1-10**
		X	0	X	11-12	1 NC		KT_7-45H	**KT7-PE1-01**
		0	X	0	13-14	1 NO		KT_9-32S KT_9-40H KTU9	**KT9-PE1-11**
		X	0	X	21-22	1 NC			
		0	X	0	13-14	1 NO		KT_7-45H	**KT7-PE1-11**
		X	0	X	21-22	1 NC			
		0	X	0	13-14	1 NO		KT_9-32S KT_9-40H KTU9	**KT9-PE1-20**
		0	X	0	23-24	1 NO			
		0	X	0	13-14	1 NO		KT_7-45H	**KT7-PE1-20**
		0	X	0	23-24	1 NO			
		X	0	X	11-12	1 NC		KT_7-45H	**KT7-PE1-02**
		X	0	X	21-22	1 NC			
	Right Side-Mounted Auxiliary Contact • 2-pole • Adds 9 mm to the width of the device. • 600V max. • One per device. • Not suitable for UL489 applications	0	X	0	33-34	1 NO		KT_9-32S KT_9-40H KTU9	**KT9-PA1-20**
		0	X	0	43-44	1 NO			
		0	X	0	33-34	1 NO		KT_7-45H	**KT7-PA1-20**
		0	X	0	43-44	1 NO			
		X	0	X	31-32	1 NC		KT_9-32S KT_9-40H KTU9	**KT9-PA1-02**
		X	0	X	41-42	1 NC			
		X	0	X	31-32	1 NC		KT_7-45H	**KT7-PA1-02**
		X	0	X	41-42	1 NC			
		0	X	0	33-34	1 NO		KT_9-32S KT_9-40H KTU9	**KT9-PA1-11**
		X	0	X	41-42	1 NC			
		0	X	0	33-34	1 NO		KT_7-45H	**KT7-PA1-11**
		X	0	X	41-42	1 NC			

❶ X=Contact Closed
O=Contact Open

❷



Accessories for KT9

Accessory	Description	Operator Position ❶ OFF	Operator Position ❶ ON	Operator Position ❶ Tripped	Term No.	Type	Connection Diagram and Terminal Markings ❷	For Use With	Catalog Number
	Front-Mounted Trip Contact • 2-pole • Indicates tripping of device • No additional space required • KT9-PEF1...250V max. • KT7-PEF1...300V max	0	X	0	13-14	NO Aux		KT_9-32S KT_9-40H KTU9	**KT9-PEF1-S10-N10**
		0	0	X	27-28	NO Trip (Short-Circuit & Overload)			
		0	X	0	13-14	NO Aux		KT_7-45H	**KT7-PEF1-S10-N10**
		0	0	X	27-28	NO Trip (Short-Circuit & Overload)			
		X	0	X	11-12	NC Aux		KT_9-32S KT_9-40H KTU9	**KT9-PEF1-S10-N01**
		0	0	X	27-28	NO Trip (Short-Circuit & Overload)			
		X	0	X	11-12	NC Aux		KT_7-45H	**KT7-PEF1-S10-N01**
		0	0	X	27-28	NO Trip (Short-Circuit & Overload)			
		0	X	0	13-14	NO Aux		KT_9-32S KT_9-40H KTU9	**KT9-PEF1-S01-N10**
		X	X	0	25-26	NC Trip (Short-Circuit & Overload)			
		0	0	X	17-18	NO Trip (Short-Circuit & Overload)			**KT9-PEF1-S10-M10**
		0	0	X	27-28	NO Trip (Short-Circuit)			
	Right Side-Mounted Trip Contact • 2-pole • Indicates tripping of motor protector • Adds 9 mm to the width of the device • 600V max. • Only one per device • A right-side mounted auxiliary contactor may be tandem on top of this trip contact.	0	0	X	57-58	NO Trip (Short-Circuit & Overload)		KT_7-45H	**KT7-PAF1-S10-M10**
		0	0	X	67-68	NO Trip (Short-Circuit)			
		0	0	X	57-58	NO Trip (Short-Circuit & Overload)		KT_7-45H	**KT7-PAF1-S10-M01**
		X	X	0	65-66	NC Trip (Short-Circuit)			
		X	X	0	55-56	NC Trip (Short-Circuit & Overload)		KT_7-45H	**KT7-PAF1-S01/M10**
		0	0	X	67-68	NO Trip (Short-Circuit)			
		X	X	0	55-56	NC Trip (Short-Circuit & Overload)		KT_7-45H	**KT7-PAF1-S01-M01**
		X	X	0	65-66	NC Trip (Short-Circuit)			
		0	0	X	77-78	NO Trip (Short-Circuit)		KT_7-45H	**KT7-PAF1-M11**
		X	X	0	65-66	NC Trip (Short-Circuit)			

❶ X=Contact Closed
O=Contact Open

❷



Accessories for KT9

Accessory	Description	For Use With	AC Coil Voltage		Catalog Number	
			50 Hz	60 Hz	Shunt Trip	Undervoltage
	Undervoltage Trip • Left-side mounted • Adds 18mm to the width of the device • Automatically trips MPCD/MCP when voltage falls below 35...70% **Shunt trip** • Left-side mounted • Adds 18mm to width of device. • Provides remote tripping of the MPCB/MCF • Maximum on time for DC operated devices: 5 sec.	KTA9 KTB9 KTC9 KTV9 KTU9 ❸	24V	24...28V	**KT9-AA-24V**	**KT9-UA-24V**
			110V	120V	**KT9-AA-120V**	**KT9-UA-120V**
			220...230V	~	**KT9-AA-230V**	**KT9-UA-230V**
			~	240...260V	**KT9-AA-260V**	**KT9-UA-260V**
			~	277V	**KT9-AA-277V**	~
			380...400V	~	**KT9-AA-400V**	**KT9-UA-400V**
			415V	480V	**KT9-AA-480V**	**KT9-UA-480V**
			DC Coil Voltage		**Shunt Trip**	**Undervoltage**
			~	24VDC	**KT9-AA-24D**	~
	Undervoltage Trip • Left-side mounted • Adds 18 mm to the width of the KT7 device • Automatically trips motor protector when voltage falls below 35…70% **Shunt Trip** • Left-side mounted • Adds 18 mm to the width of the KT7 device • Trips motor protector when voltage is applied remotely	KTA7 KTB7 KTC7	**AC Coil Voltage**		**Shunt Trip**	**Undervoltage**
			12V	14V	**KT7-AA-14V**	**KT7-UA-14V**
			21V	24V	**KT7-AA-24V**	**KT7-UA-24V**
			24V	28V	**KT7-AA-28V**	**KT7-UA-28V**
			42V	48V	**KT7-AA-48V**	**KT7-UA-48V**
			110V	**120V**	**KT7-AA-120V**	**KT7-UA-120V**
			110V	127V	**KT7-AA-127V**	**KT7-UA-127V**
			220...230V	~	**KT7-AA-230V**	**KT7-UA-230V**
			~	240...260V	**KT7-AA-240V**	**KT7-UA-240V**
			240V	277V	**KT7-AA-277V**	**KT7-UA-277V**
			380V	460V	**KT7-AA-460V**	**KT7-UA-460V**
			415V	**480V**	**KT7-AA-480V**	**KT7-UA-480V**
			525V	600V	**KT7-AA-600V**	**KT7-UA-600V**
			DC Coil Voltage		**Shunt Trip**	**Undervoltage**
			9V DC		**KT7-AA-9D**	**KT7-UA-9D**
			12V DC		**KT7-AA-12D**	**KT7-UA-12D**
			24V DC		**KT7-AA-24D**	**KT7-UA-24D**
			36V DC		**KT7-AA-36D**	**KT7-UA-36D**
			48V DC		**KT7-AA-48D**	**KT7-UA-48D**
			60V DC		**KT7-AA-60D**	**KT7-UA-60D**
			64V DC		**KT7-AA-64D**	**KT7-UA-64D**
			72V DC		**KT7-AA-72D**	**KT7-UA-72D**
			80V DC		**KT7-AA-80D**	**KT7-UA-80D**

Undervoltage Trip Connection Diagram



Shunt Trip Connection Diagram



❶ For Overload (thermal) Trip of KT9/KT7.
❷ For Short-Circuit (magnetic) Trip of KT9/KT7.
❸ (UL 489 application up to 30 A)

Classic Handle Assembly, Type 1/4/4X/12

Accessory	Description	Color	Legend	For use with...	Frame size (Length)	Catalog Number
	**Door Coupling Handle** ❶ • For 3 padlocks 4...8 mm (5/16 in.) in diameter • IPX4 Protection/Type 1, 3R Interlock override capability • Can be modified for locking in ON position • Ships with coupling — order extension shaft and legend plate separately	Gray/ Black	O - I OFF -ON Trip	KT_9-32S, KT_9-40H, KTU9 ❶	65 x 65mm	**KT9-HTN**
				KT_7-45H ❶		**KT7-HTN**
		Red/ Yellow	O - I OFF -ON Trip	KT_9-32S, KT_9-40H, KTU9 ❶	65 x 65mm	**KT9-HTRY**
				KT_7-45H ❶		**KT7-HTRY**
	Extension Shaft (Short Length) ❶ • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) KTA9-32S: 136 mm (5.35 in) KT_9-40H: 143 mm (5.63 in) • For Cat. Nos. KT9-HTN and KT9-HTRY handles			KTA9-32S KT_9-40H KT_7-45H		**KT9-HTS**
	Extension Shaft (Standard Length) • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) KTA9-32S: 136…358 mm (5.35…14.1 in) KT_9-40H: 143…364 mm (5.63…14.33 in) • For Cat. Nos. KT9-HTN and KT9-HTRY handles					**KT9-HT**
	Extension Shaft (Extended Length) • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) KTA9-32S: 136…507 mm (5.35…19.96 in) KT_9-40H: 143…513 mm (5.63…20.0 in) • For Cat. Nos. KT9-HTN and KT9-HTRY handles					**KT9-HTL**

Contemporary Handle Assembly, Type 3R/3/4/4X

Accessory	Description	Color	Legend	For use with...	Frame Size (Length)	Catalog Number
	Contemporary Door Coupling Handle • Screw Fixing • Type 3R, 3, 12, 4, 4X, IP66 • Field configurable for defeatable or non-defeatable • Ships with coupling — order extension shaft and legend plate separately • Requires 30mm hole for mounting • For up to 2 padlocks	Black/ Black	O - I OFF -ON Trip	KT_9-32S, KT_9-40H, KTU9	48.7 x 47mm	**KT9-SB**
				KT_7-45H		**KT7-SB**
		Red/ Yellow	O - I OFF - ON Trip	KT_9-32S, KT_9-40H, KTU9	48.7 x 47mm	**KT9-SY**
				KT_7-45H		**KT7-SY**
	Extension Shaft • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) • See Technical Section for mounting depth information			KT9-SB KT9-SY	305mm (12”)	**KT9-S1**
				KT7-SB KT7-SY		**KT7-S1**
				KT9-SB KT9-SY	533mm (21”)	**KT9-S2**
				KT7-SB KT7-SY		**KT7-S2**

Handle Accessories

Accessory	Description	For use with...	Catalog Number
	Coupler • Coupler for extension shaft • Included with KT9-HTN/HTRY and KT9-SB/SY handles	KTA9-32S, KT_9-40H KTU9-40H	**KT9-DNC**
	**Extension Shaft Support** ❷ • Provides consistent alignment of the shafts with handle or door coupling • Recommended for shaft lengths >200mm (7.8 in) • 9mm in width and snaps on right side of devices • Allows for one side-mount auxiliary	KT_9-32S, KT_9-40H, KTU9	**KT9-SHS**
		KT_7-45H	**KT7-SHS**
	Legend Plate • Marking: “Haupschalter” and “Main Switch” (Black/Gray) • Marking: “Not-Aus” and “Emergency Off” (Black/Yellow)	KT9-HT_	**KT9-HTFCN**
		KT7-HT_	**KT7-HTFCN**
		KT9-HT_	**KT9-HTFCRY**
		KT7-HT_	**KT7-HTFCRY**

❶ See Dimensions and Technical data in this section for design compatibility.
❷ See page F41 for assembly example and dimensions.

Accessories for KT9

Accessory	Description	Color	For Use With	Catalog Number
KT9-KRY KT9-KN KT9-M3	**Lockable Twist Knob** • For 1 padlock 4...6 mm (3/16 in.) diameter shackle • Can be locked in OFF position	Black	KT_9-32S, KT_9-40H, KTU9	**KT9-KN**
			KT_7-45H	**KT7-KN1**
		Red/Yellow	KT_9-32S, KT_9-40H, KTU9	**KT9-KRY**
			KT_7-45H	**KT7-KRY1**
	Locking Tag • Padlock attachment to the lockable handles • Up to three padlocks 4...8 mm (5/16 in.) dia. shackle	Red	KT9-KN KT9-KRY1	**KT9-M3**
			KT7-KN1 KT7-KRY1	**KT7-DS**
	Terminal Adapter for Type E Applications ❶ • Required for self-protected combination motor controller (Type E) application of KT_9-32S, KT_9-40H and KT_7-45H • Not for use with bus bars		KT_9-32S, KT_9-40H	**KT9-40-TE**
			KT_7-45H	**KT7-45-TE**
	Anti-Tamper Shield • Provides protection against inadvertent adjusment of the current setting • Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10		KT_9-32S, KT_9-40H	**KT9-CA**
			KT_7-45H	**KT7-25-CA**
	**Screw Adaptor** • For screw fixing of motor protection circuit breaker • Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10		KT_9-32S, KT_9-40H, KTU9	**KT9-N45**
			KT_7-45H	**KT7-45-AS**

Marking Systems

Component	Description	Pkg. Qty.	Catalog Number
	Label Sheet - 1 sheet with 105 self-adhesive paper labels each, 6 x17mm	1	**CA7-FMS**

❶ Terminal Adaptors are supplied as standard on enclosed KT9 and CX7 starters, as well as, CLE- assembled products, assuring they can be used in Type E applications. Alternatively, compact busbar supply block KT9-_-A2E or -A3E meet Type E requirements for terminal spacing.

Connecting Modules *(for connecting KTA7, KTB7 or KTC7 into KT_9 to CA8, CA7 AC coil, or CA7 Electronic DC coil contactors)* ❷

Module	Type	Description	For Connecting	Catalog Number ❶
	ECO Connection Module 12A (IEC) , 11A (UL)	• For DOL and revering starters • Eco-starters mount on single DIN Rail (KT_9 on DIN Rail) • Electrical and mechanical interconnection of KT_9 and CA8 contractors	KT_9-32S to CA8	**KT9-32S-PEK12**
	ECO Connection Module 25A (IEC) , 22A (UL)	• Eco-starters mount on single DIN Rail (KT_9 on DIN Rail) • Electrical and mechanical interconnection of KT_9 MPCB and CA7 (with AC coils or 24V DC electronic coils) contactors	KT_9-32S to CA7-9…23	**KT9-32S-PEC23**
			KT_9-40H to CA7-9…23	**KT9-40H-PEC23**
	ECO Connection Module 38A (IEC) , 34A (UL)	• Eco-starters mount on single DIN Rail (KT_9 on DIN Rail) • Electrical and mechanical interconnection of KT_9 MPCB and CA9 (with AC coils or 24V DC electronic coils) contactors	KT_9 -40H to CA7-30…37	**KT9-40H-PEC37**
	ECO Connection Module KT9-...-PNC23 **25A (IEC), 24A (UL)** KT9-...-PNC37 **38A (IEC), 34A (UL)**	• Contactor and MPCB MUST BE mounted separately on (2) DIN Rails Electrical interconnection of KT_9 and CA7 (with AC coils)	KT_9-32S to CA7-9…23	**KT9-32S-PNC23**
			KT_9-40H to CA7-9…23	**KT9-40H-PNC23**
			KT_9-40H to CA7-30…37	**KT9-40H-PNC37**
	Connecting Modules — 25 and 45 A	• Contactor and MPCB MUST BE mounted separately on (2) DIN Rails Electrical • Interconnection of KT_7-45H and CA7 (with AC coils)	KT_7-45H to CA7-30…37	**KT7-45H-PNC37**
			KT_7-45H to CA7-43	**KT7-45H-PNC43**

Coil Modules

	Coil Extension Modules	• Provides access to coil terminals on 3-component starters	CA7-9…23	**KT9-32S-PSC23**
			CA7-30...55	**KT9-80H-PSC43**
			CA7-30…55	**KT7-45H-PSC43**

Type W Mounting Modules

Module	Description	Width (mm)	Catalog Number
	**Short Mounting Module -** Requires Connecting Module from tables above • Provides support for KT9 + CA7 or CA8 • Top rail is specifically designed for KT9 • Bottom rail is movable for easy assembly and disassembly • Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts • 228 mm long	45	**W-32489**
		54	**W-32490**
	Long Mounting Module - See Section D for Connecting Modules • Provides support for KT9 + PCS Softstarter, CA7 + PCS Softstarter or KTB9 + CA7+CEP7 • Top rail is specifically designed for KT9 • Bottom rail is movable for easy assembly and disassembly • Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts • 283 mm long	45	**W-32496**
		54	**W-32497**

❶ cURus Approved (File # E33916).
❷ Not for use with KTU9 Circuit Breakers

Compact Busbar System for KT_9 Motor Controllers ❶

Accessory	Description	For Use With	Catalog Number
	**Compact Busbar — 45 mm Spacing (Rated 64 A)** • For use with front-mounted auxiliary contact on KT_9 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers	KTA9-32S, KT_9-40H	**KT9-40-DB-45-2** **KT9-40-DB-45-3** **KT9-40-DB-45-4** **KT9-40-DB-45-5**
	**Compact Busbar — 54 mm Spacing (Rated 64 A)** • For use with side-mounted auxiliary contact on KT_9 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers	KTA9-32S, KT_9-40H	**KT9-40-DB-54-2** **KT9-40-DB-54-3** **KT9-40-DB-54-4** **KT9-40-DB-54-5**
	Compact Busbar — 54mm Spacing (Rated 115 A) • For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers	KT_7-45H	**KT7-45-DB-54-2** **KT7-45-DB-54-3** **KT7-45-DB-54-4**
	**Compact Busbar — 63 mm Spacing (Rated 115 A)** • For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers	KT_7-45H	**KT7-45-DB-63-2** **KT7-45-DB-63-3** **KT7-45-DB-63-4**
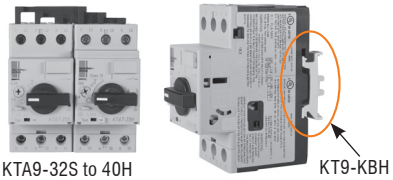 KTA9-32S to 40H KT9-KBH	**Top Hat Rail Adapter — 10 mm** • Adjust the depth of the KTA9-32S to the KT_9-40H • Allows the use of compact busbars across both frame sizes • Must be ordered in multiples of 10 • Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10	KTA9-32S	**KT9-KBH**
 KT9-40-A2E	**Feeder Block for Compact Busbar** • Supply of compact busbars • Increases terminal capacity	KTA9-32S	**KT9-40-A2E**
		KT_7-45H	**KT7-45-A2E**
 KT9-40-A3E	**Feeder Terminal for Compact Busbar** • For supply of compact busbars • Top feed — overlaps compact busbar • Meets UL Type E spacing requirements	KTA9-32S, KT_9-40H	**KT9-40-A3E**
		KT_7-45H	**KT7-45-A3E**
	Terminal Cover • For covering of unused compact bus bar terminals IP2X finger protection • Must be ordered in multiples of 10 • Sold only in packages of 10. Order 10 pieces to receive 1 pkg. of 10	KT9-40-DB	**KT9-40-DBA**
		KT7-45-DB	**KT7-45-DBA**

❶ UL Approved (File #E33916); CSA Approved (File #13908).

General Data

Attribute				KT9-32S	KT9-40H	KT7-45H
Standards compliance			IEC	IEC/EN 60947–2, IEC/EN 60947-4-1		
			cULus ❶	UL 60947-4-1, CSA C22.2, No. 60947-4-1		
Certifications			Regional ❶	CCC, EAC, CE, IEC, cULus Listed		cULus Listed, CCC, EAC, CE
Rated Insulation Voltage U_i			IEC [V]	690		
			UL/CSA [V]	600		
Rated Impulse Withstand Voltage U_{imp}			Pollution degree	3		
			Main circuits U_{imp}/Overvoltage Category	6 kV/III, 8 kV (Disconnect)		
			Auxiliary circuits U_{imp}/Overvoltage Category	6 kV/III		
Rated Frequency			[Hz]	45-65		
Utilization Category	IEC 60947-2 (Circuit breaker)			A		
	IEC 60947-4-1 (Motor starter)			AC-3		
Life Span		Mechanical	[operations]	100,000		30,000
		Electrical (I_e max.)	[operations]	100,000		30,000
Switching Frequency			[operations/hours]	max. 25		
Ambient Temperature		Storage	[°C (°F)]	-40...+85°C (-40-185°F)		
		Operation	[°C (°F)]	-25...+70°C (-13-158°F)		
Climatic resistance	Operating Humidity/Moisture heat (60068-2-3)			5…95% Non-condensing		
Site Altitude			[m]	to 2000 N.N. (6561 ft)		
Protection Class				IP2X from all directions		
Resistance to Shock, Transport (60068-2-27)			ON	15 G/11 ms		
			OFF	30 G/11 ms		
Resistance to Vibration, Operation (60068-2-6)				5 G		
Rated Thermal Current I_{th}	up to 40 °C (104 °F) ambient temperature		[A]	0.1…32	0.63…40	6.3…45
	up to 60 °C (140 °F) ambient temperature		[A]	0.1…32	0.63…40	6.3…45
Rated Supply Current I_e			[A]	0.1…32	0.63…40	6.3…45
Dependence on Temperature		40 °C (104 °F)	[A]	no reduction		
		50 °C (122 °F)	[A]	no reduction		
		60 °C (140 °F)	[A]	no reduction		
		70 °C (158 °F)	[A]	15% current reduction of the upper rated current I_e		
Overload Protection Characteristics				IEC 60947-4-1 Motor protection (except Cat. Nos. KTB9-40H, KTB7-45H)		
Ambient Temperature Compensation			[°C (°F)]	-25…+60 (-13…+140)		
Phase-loss Protection				Differential release		
Trip class				10 (except Cat. Nos. KTB9-40H, KTB7-45H) fixed setting		
Magnetic Release				fixed setting		
Release current (±20%)	for KTA9, KTB9		[A]	14 x I_e max. ❷		13 x I_e max
	for KTA9, KTB9 36A, 40A		[A]	12 x I_e max. ❷		~
	for KTC9		[A]	18…22 x I_e max. ❸		
Total Power loss P_v	Circuit Breaker at rated load/ operating temp.		[W]	4…11	4…14	7…22
Main Disconnect Switch Application				Yes, with accessories		
Application Conditions	KT_9-40H…36A, -40A: Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).					
	For utilization outside North America, assemblies (of products) shall comply to the IEC 61439-1 requirements					
	KT9 manual starters are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments.					

❶ cULus Listing in process.
❷ I_e max. = maximum values of setting ranges fixed magnetic setting for KTV9-40H; see ratings.
❸ I_e max. = maximum values of setting ranges; see ratings.

MPCB Connecting Characteristics

Connection	No. of conductors	KTA9-32S	KT_9-40H	KT_7-45H
Power Terminals				
Terminal Type		Screw Clamp up to 16 A, M4	Screw Clamp greater than 16 A, M4	
Screwdriver		Pozidriv No.2/Blade No.3	Pozidriv No.2/Blade No.3	Pozidrive No. 2/Blade No. 3
Solid or stranded	1 conductor	1…6 mm²	1.5…10 mm²	2.5…25 mm²
	2 conductor	1…2.5 mm² 2.5…6 mm²	1.5…4 mm² 4…10 mm²	2.5…25 mm²
Flexible with ferrule (end sleeve) 	1 conductor	1…6 mm²	1.5…10 mm²	2.5…25 mm²
	2 conductor	1…2.5 mm² 2.5…4 mm²	1.5…4 mm² 4…10 mm²	2.5…25 mm²
Finely stranded	1 conductor	1.5…6 mm²	2.5…10 mm²	16…25 mm²
	2 conductor	1.5…4 mm² 2.5…6 mm²	2.5…6 mm² 4…10 mm²	16…25 mm²
Cross section per UL/CSA solid, stranded	1 conductor	No. 14…10 AWG	No. 14…8 AWG	No.14…8
	2 conductor	No. 14…10 AWG	No. 14…10 AWG No. 12…8 AWG	No.14…8
Stripping length		10 mm (0.39 in.)	10 mm (0.39 in.)	10 mm (0.39 in.)
Tightening torque	[Nm]/[lb-in.]	2...2.5 / 18...22	2…2.5/18…22	3...3.5 / 27...30

Approval Comparison

	KTA9-32S	KT_9-40H	KT_7-45H
Features and Approvals			
Max. Current I_e	32 A	32 A	45 A
Current Rating	0.1…32 A	0.63…40A	6.3…45 A
Short Circuit Protection	✓	✓	✓
Standard magnetic Trip	✓	✓	✓
High Magnetic Trip	✓	✓	✓
Magnetic Only Trip (MCP)	✓	✓	✓
Overload Protection	✓	✓	✓
Trip Class	✓	✓	✓
Application at output of VFD (multi-motor)		✓ (KTV9)	✓
Standards Compliance:			
CSA22.2, No. 14	✓	✓	✓
UL508 (Group Installation)	✓(see ratings)	✓(see ratings)	✓(see ratings)
UL508 Manual, Self-protected (Type E)	✓(see ratings)	✓(see ratings)	✓(see ratings)
UL508 (Overload Protection)	✓	✓	✓
IEC60947-1,-2	✓	✓	✓
IEC60947-4-1	✓	✓	✓
CE	✓	✓	✓
ATEX (IEC60079-14)	✓ (up to 25 A)	✓ (up to 25 A except KTV9)	✓
CCC	✓ (up to 25 A)	✓ (up to 25 A except KTV9)	✓
Accessories			
External Rotary Operator	✓	✓	✓
Auxiliary Contacts	✓	✓	✓
Trip Indicator Contacts	✓	✓	✓

Auxiliary Contact Specifications – for KTA9-32S... and KT_9-40H devices

Attribute				Front-mounted Auxiliary Contacts Cat. Nos. KT9-PE1, -PEF1/ -PEF1-S10M10	Right Side-mounted Auxiliary Contacts Cat. No. KT9-PA1
Rated Thermal Current I_{th}	at 40°C (104°F) ambient temperature		[A]	5	10
	at 60°C (140°F) ambient temperature		[A]	4	6
Back-up Fuses gG, gL			[A]	10	10
General Use current			[A]	5	10
Rated insulation voltage U_i	IEC		[V]	250	690
	UL/CSA		[V]	240	600
Contact rating code designation (UL/CSA)			AC	B300	A600
			DC	R300	Q600
Rated Supply Current I_e		24V [A]		4	6
		120V [A]		3	5
	AC-15	240V [A]		1.5	3
		415V [A]		-	2
		690V [A]		-	1
		24V [A]		1.2	2
		125V [A]		0.22	0.55
	DC-13	250V [A]		0.11	0.27
		400V [A]		-	0.15
		500V [A]		-	0.13
Type of Terminals					
Recommended Screwdriver				Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3
	Flexible with insulated ferrule	1 or 2 conductors		0.5…1.5 mm2/No. 18…14 AWG	0.5…2.5 mm2/No. 18…14 AWG
	Flexible	1 or 2 conductors		0.5…1.5 mm2/No. 18…14 AWG	0.75…2.5 mm2/No. 18…14 AWG
	Stranded per UL/CSA	1 or 2 conductors		0.5…1.5 mm2/No. 18…14 AWG	0.75…2.5 mm2/No. 18…14 AWG
	Solid	1 or 2 conductors		0.5…1.5 mm2/No. 18…14 AWG	0.5…2.5 mm2/No. 18…14 AWG
Conductor steps				Max 2 conductor steps allowed	Max 2 conductor steps allowed
Tightening torque				1...1.2 N•m/8.9...10.6 lb•in	1...1.2 N•m/8.9...10.6 lb•in1...1.2

Auxiliary Contact Specifications – for KT_7-45H... devices

Attribute				Front-mounted Auxiliary Contacts Cat. Nos. 140M-C-AFA…, 140M-C-AFAR…	Right Side-mounted Auxiliary Contacts Cat. Nos. 140M-C-ASA…, 140M-C-ASAR…
Rated Thermal Current I_{th}	at 40°C (104°F) ambient temperature		[A]	5	10
	at 60°C (140°F) ambient temperature		[A]	4	6
Back-up Fuses gG, gL			[A]	10	10
Contact rating code designation (UL/CSA)			AC	B300	A600
			DC	R300	Q600
Rated Supply Current I_e		24V [A]		4	6
		120V [A]		3	5
	AC-15	240V [A]		1.5	3
		415V [A]		-	2
		690V [A]		-	0.7
		24V [A]		2	2
		120V [A]		0.5	0.5
	DC-13	240V [A]		0.25	0.25
		415V [A]		-	0.15
Type of Terminals					
Recommended Screwdriver				Pozidriv No. 2/Blade No.3	Pozidriv No. 2/Blade No.3
	Flexible with insulated ferrule	1 conductor		0.5…1.5 mm²	0.5…2.5 mm²
		2 conductors		0.75…1.5 mm²	0.75…2.5 mm²
	Stranded per UL/CSA	1 or 2 conductors		0.75…1.5 mm²/No. 18…14 AWG	0.75…2.5 mm²/No. 18…14 AWG
	Solid	1 or 2 conductors		0.75…1.5 mm²/No. 18…14 AWG	0.75…2.5 mm²/No. 18…14 AWG
Tightening torque				1...1.2 N•m/8.9...10.6 lb•in	1...1.2 N•m/8.9...10.6 lb•in1...1.2

Undervoltage and Shunt Trip Specifications—For KTA9-32S… and KT_9-40H… devices

				Undervoltage Trip for Left-Side Mounting Cat. Number KT9-UA-*	Shunt Trip for Left-Side Mounting Cat. Number KT9-AA-*
Actuating Voltage			Pull-in	0.85...1.1 x U_s	0.7...1.1 x U_s
			Drop-out	0.7...0.35 x U_s	0.7...1.1 x U_s
Rated AC Control Voltage	KT9-UA-24V		50 Hz	24	-
			60 Hz	28	-
	KT9-UA-120V		50 Hz	110	-
			60 Hz	120	-
	KT9-UA-230V		50 Hz	220…230	-
			60 Hz	-	-
	KT9-UA-260V		50 Hz	-	-
			60 Hz	240…260	-
	KT9-UA-400V		50 Hz	380…400	-
			60 Hz	440…460	-
	KT9-UA-480V		50 Hz	415	-
			60 Hz	480	-
	KT9-AA-24V		50 Hz	-	24
			60 Hz	-	24…28
	KT9-AA-120V		50 Hz	-	110
			60 Hz	-	120
	KT9-AA-230V		50 Hz	-	220…230
			60 Hz	-	-
	KT9-AA-260V		50 Hz	-	-
			60 Hz	-	240…260
	KT9-AA-277V		50 Hz	-	240
			60 Hz	-	277
	KT9-AA-400V		50 Hz	-	380…400
			60 Hz	-	440…460
	KT9-AA-480V		50 Hz	-	415
			60 Hz	-	480
	On-time			Continuous duty	Continuous duty
	Coil consumption			8.5/8	8.5/8
				4/2	4/2
Rated DC Control Voltage	KT9-AA-24D			-	24
	On-time			-	Max 5 s
	Coil consumption		Pick-up	-	50
Type of Terminals					
Recommended screwdriver				Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3
Flexible with insulated ferrule		1 or 2 conductor		0.5…2.5 mm²/ No. 18…14 AWG	0.5…2.5 mm²/ No. 18…14 AWG
Flexible		1 or 2 conductor		0.75…2.5 mm²/ No. 18…14 AWG	0.75…2.5 mm²/ No. 18…14 AWG
Stranded per UL/CSA		1 or 2 conductor		0.75…2.5 mm²/ No. 18…14 AWG	0.75…2.5 mm²/ No. 18…14 AWG
Solid		1 or 2 conductor		0.5…2.5 mm²/ No. 18…14 AWG	0.5…2.5 mm²/ No. 18…14 AWG
Conductor steps				Max 2 conductor steps allowed	Max 2 conductor steps allowed
Tightening torque				1…1.2 N•m/8.9…10.6 lb•in	1…1.2 N•m/8.9…10.6 lb•in1…1.2

Undervoltage and Shunt Trip Specifications – For KT_7-45H... devices

Attribute				Undervoltage Trip for Left-Side Mounting Cat. Number KT7-UA-*	Shunt Trip for Left-Side Mounting Cat. Number KT7-AA-*
Actuating Voltage	Pick-up		[V]	0.85…1.1 x U_s	0.7…1.1 x U_s
	Drop-out		[V]	0.7…0.35 x U_s	0.7…1.1 x U_s
Rated AC Control Voltage	Min	50 Hz	[V AC]	21	21
		60 Hz	[V AC]	24	24
	Max	60 Hz	[V AC]	600	600
	On-time			Continuous duty	Continuous duty
	Coil consumption	Pick-up	[VA/W]	8.5/8	8.5/8
		Hold-in	[VA/W]	4/2	4/2
Type of Terminals					
Recommended Screwdriver				Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3
	Flexible with insulated ferrule	1 conductor		0.5…2.5 mm²	0.5…2.5 mm²
		2 conductors		0.75…2.5 mm²	0.75…2.5 mm²
	Stranded per UL/CSA	1 or 2 conductors		0.75…2.5 mm²/No. 18…14 AWG	0.75…2.5 mm²/No. 18…14 AWG
	Solid	1 or 2 conductors		0.75…2.5 mm²/No. 18…14 AWG	0.75…2.5 mm²/No. 18…14 AWG
Conductor steps				1.2…1.5 N•m/10.6…13.3 lb•in	1.2…1.5 N•m/10.6…13.3 lb•in

Time-Current Characteristic

KTA9 KTA7 Motor Protection (for KTV9, see ratings)

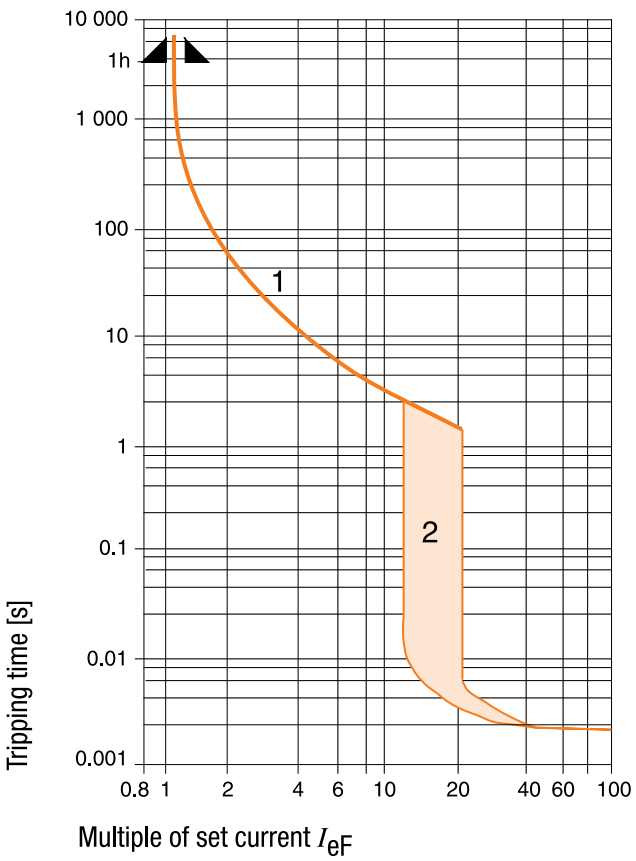

1. Thermal Release Trip Current

The adjustable current-dependent delayed bimetal release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20°C starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single-phasing. The overload characteristic is also valid for transformer protection.

2. Magnetic Release Trip Current

The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13...14 times the maximum value of setting range (high inrush protection -20 x I_e maximum). At a lower overload setting the magnetic trip is correspondingly higher.

Current Setting I_{ef}

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1. If a different value is prescribed (e.g., reduced I_e for cooling medium having a temperature higher than 40°C or a place of installation higher than 2000m above sea level), the setting current is equal to the reduced rated current I_e of the motor.

Cut-off Current ❶

KTA9-32S-*
Max. Cut-Off Current at U_e = 400V / 415V, 50Hz

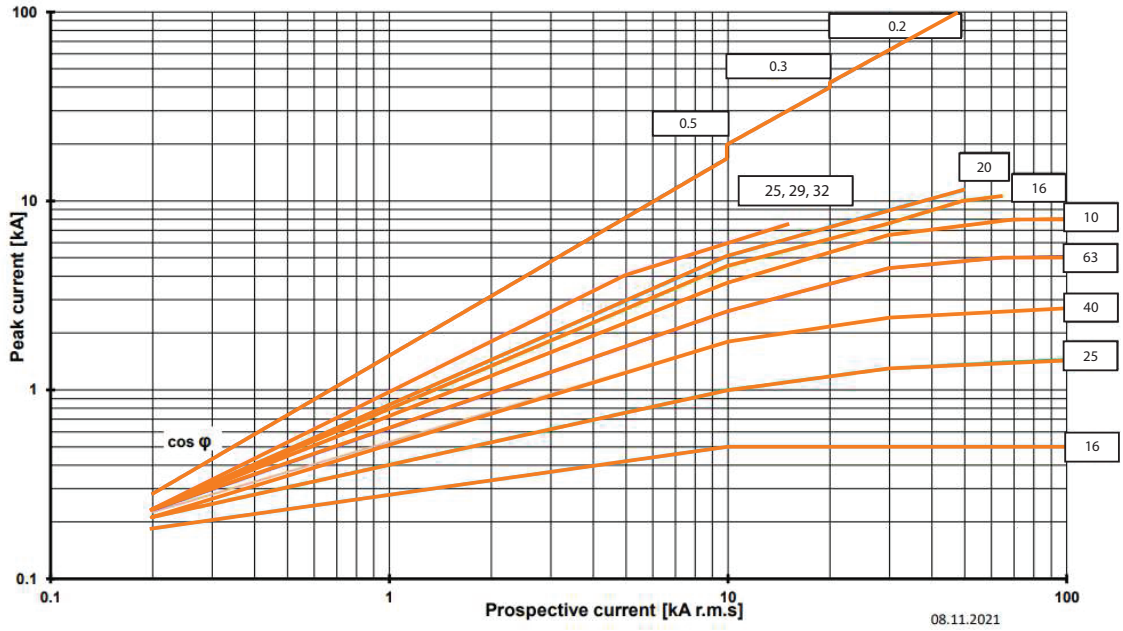

KTA9-32S-*
Max. Let-Through-Energy at U_e = 400V / 415V, 50Hz

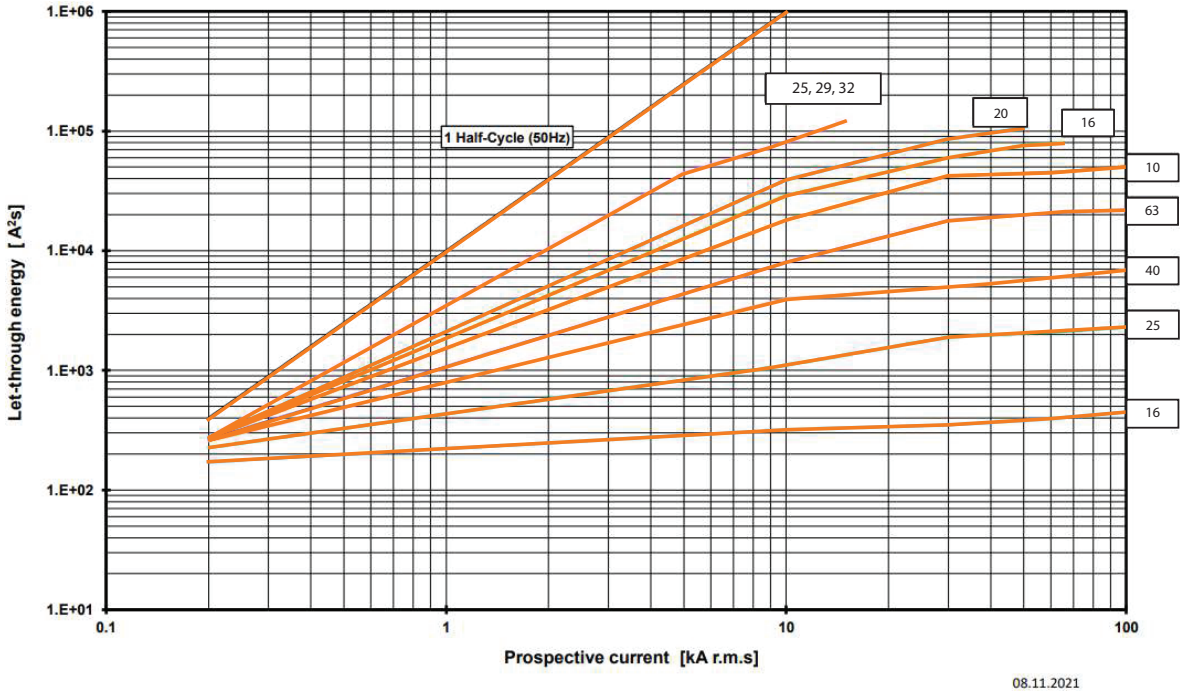

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Cut-off Current ❶

KTA9-40H-*
Max. Cut-Off Current at U_e = 400V / 415V, 50Hz

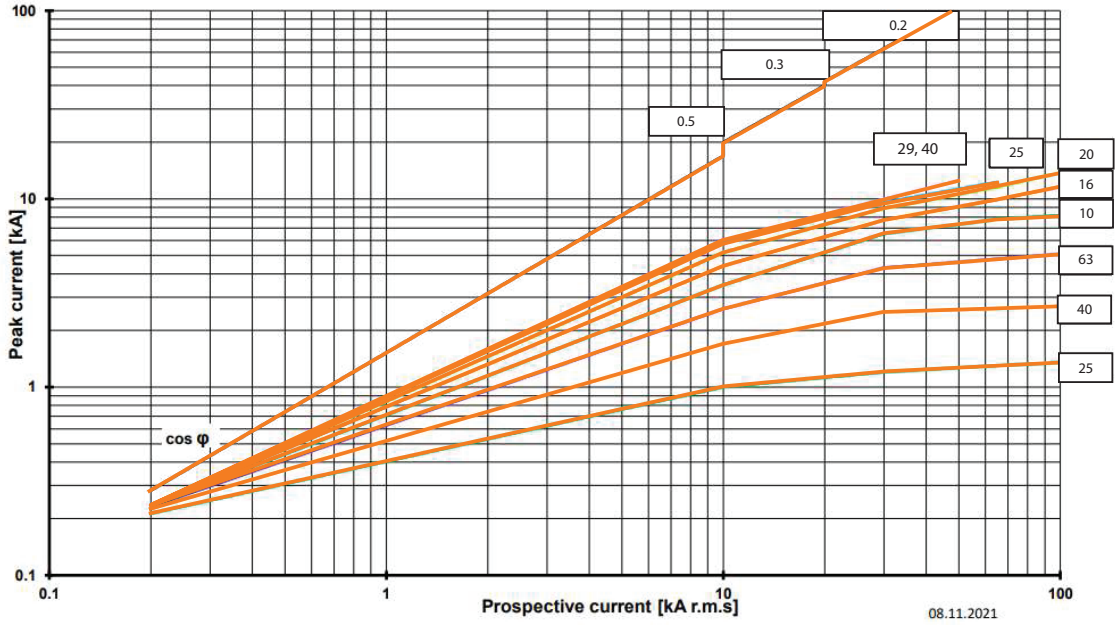

KTA9-40H-*
Max. Let-Through-Energy at U_e = 400V / 415V, 50Hz

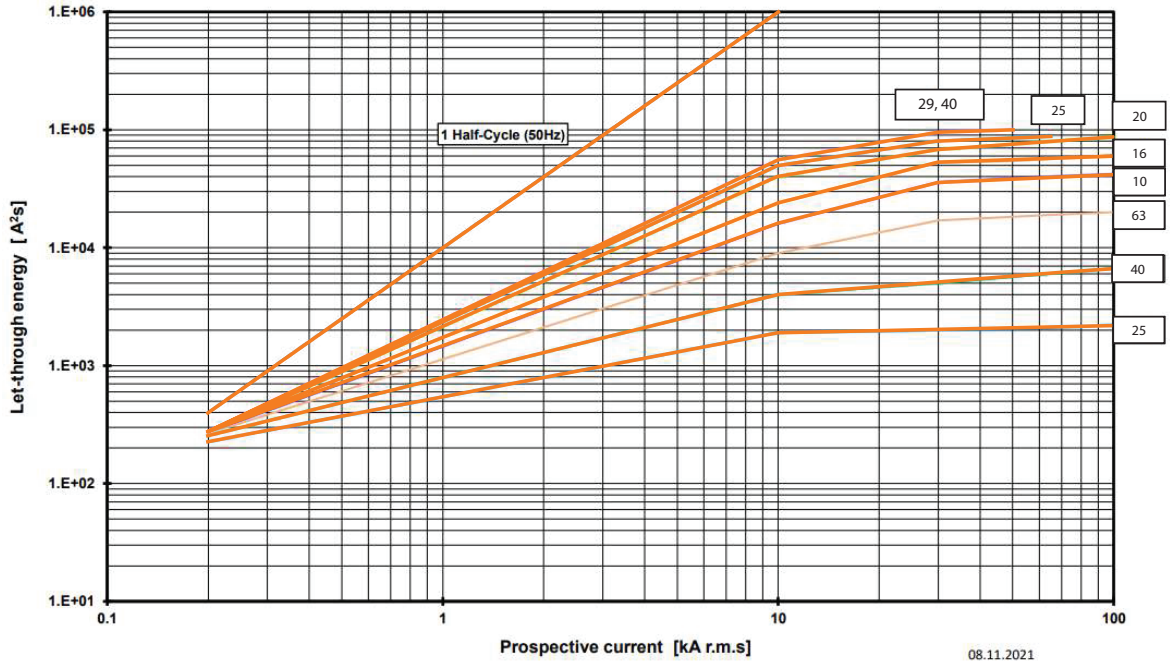

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Approximate Dimensions

KT_9 Devices and Accessories – Mounting Orientation

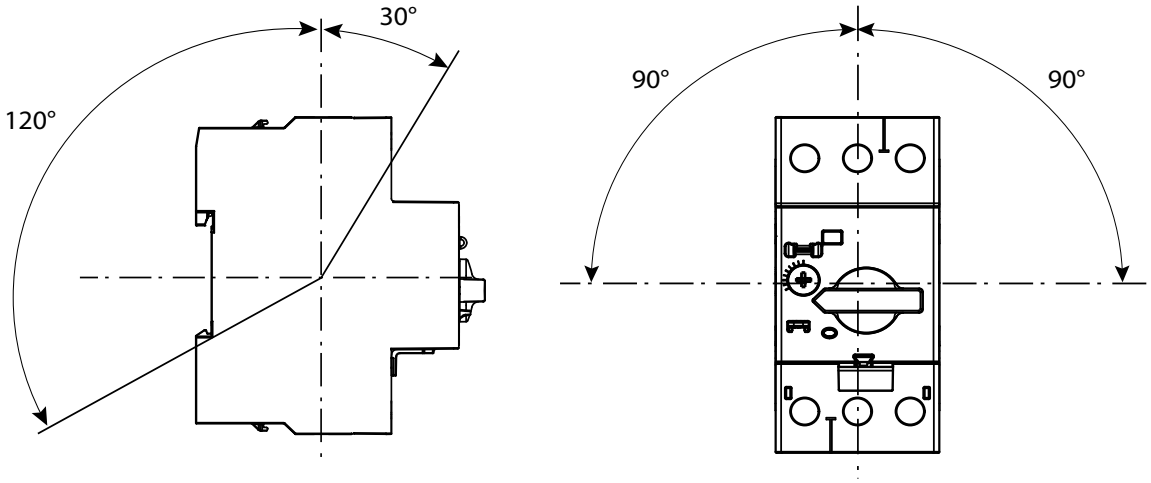

KT_9 Devices and Accessories – Spacing Requirements

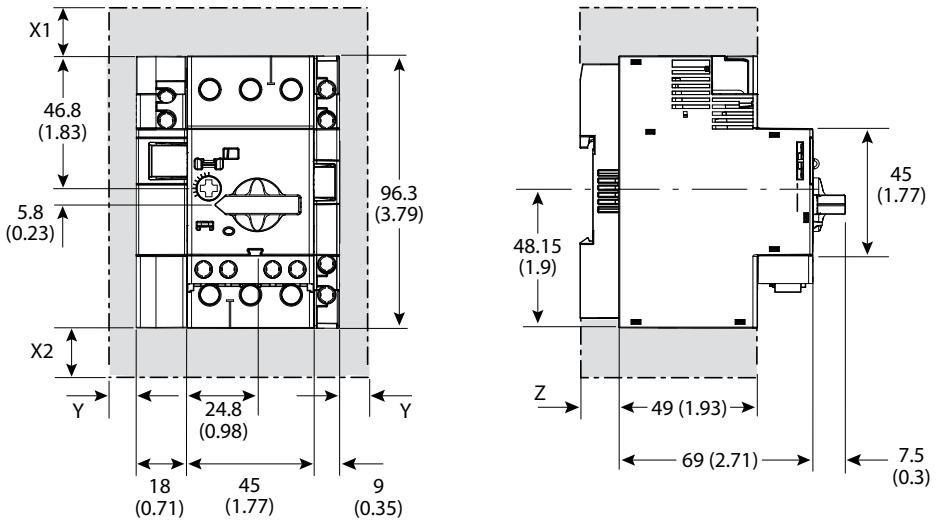

Frame Size	Voltage [V AC]	Minimum Distance to Grounded Parts or Walls [mm (in)]			Z
		X1	X2	Y	
KTA9-32S (C-Frame)	400	30 (1-3/16)	30 (1-3/16)	9 (23/64)	7.5 (19/64)
	500	30 (1-3/16)	30 (1-3/16)	9 (23/64)	
	690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)	
KT_9-40H (D-Frame)	400	30 (1-3/16)	30 (1-3/16)	9 (23/64)	13.5 (17/32)
	500	30 (1-3/16)	30 (1-3/16)	9 (23/64)	
	690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)	

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Motor Protection Circuit Breaker (C-Frame), Cat. No. KTA9-32S…

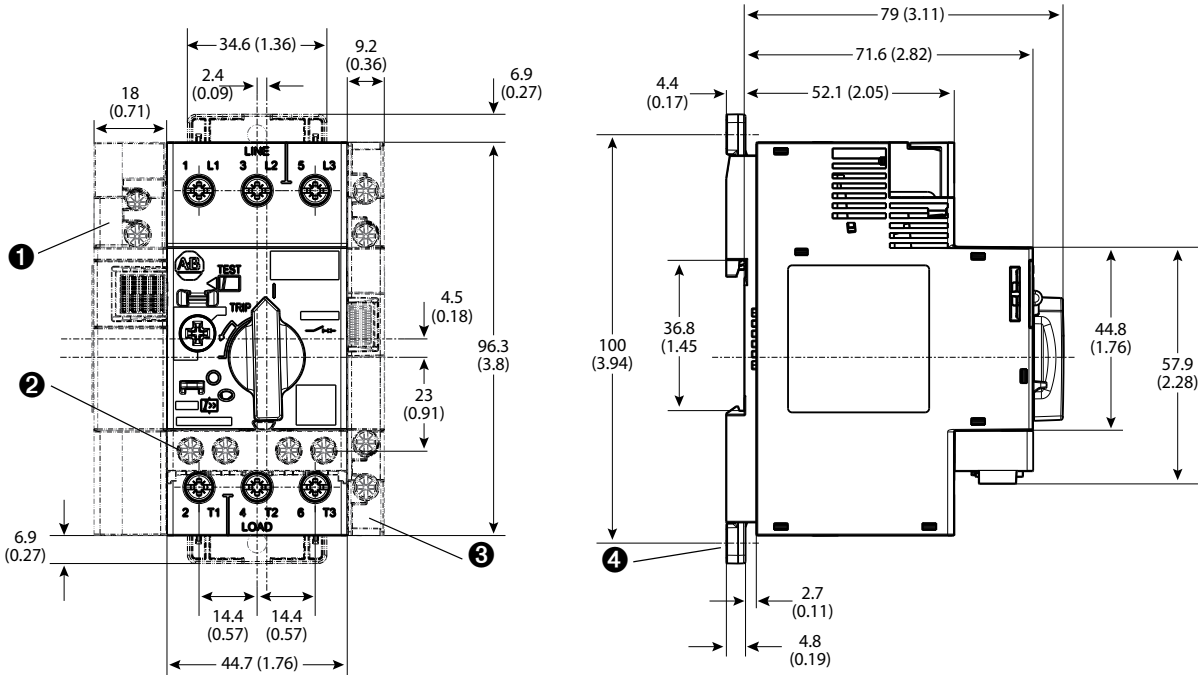

Motor Protection Circuit Breaker (D-Frame), Cat. No. KT_9-40H…

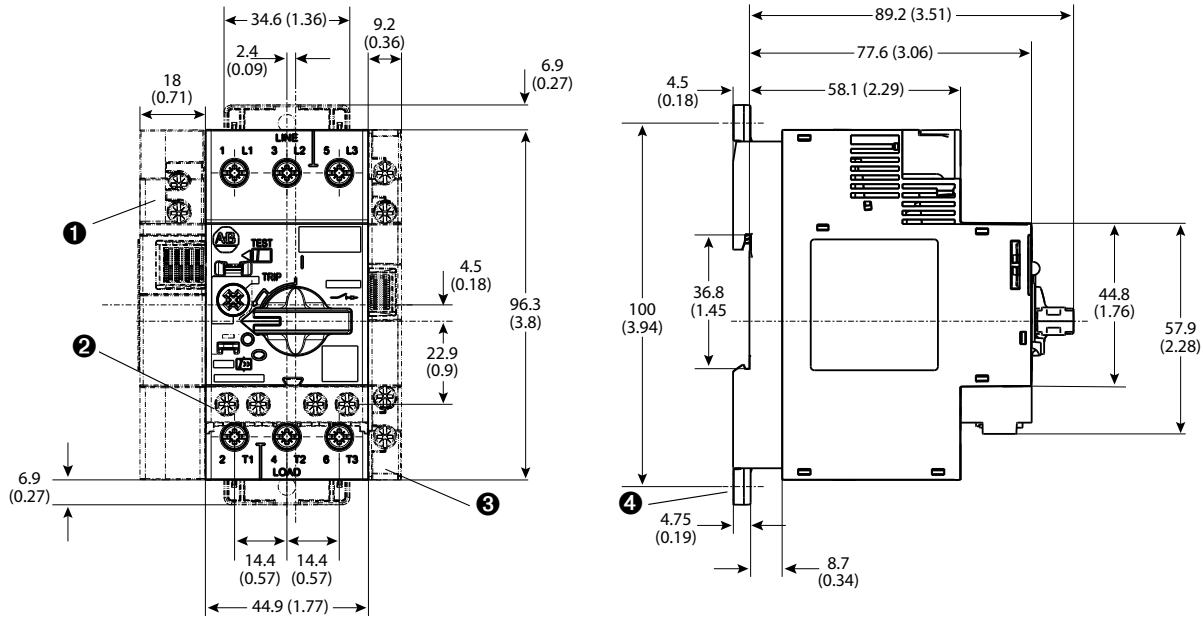

❶ Undervoltage/shunt trip
❷ Auxiliary contact (front mounted)
❸ Auxiliary contact (side mounted)
❹ Screw mounting adapter

Feeder Terminal for Compact Busbar, Cat. No. KT9-40-A3E

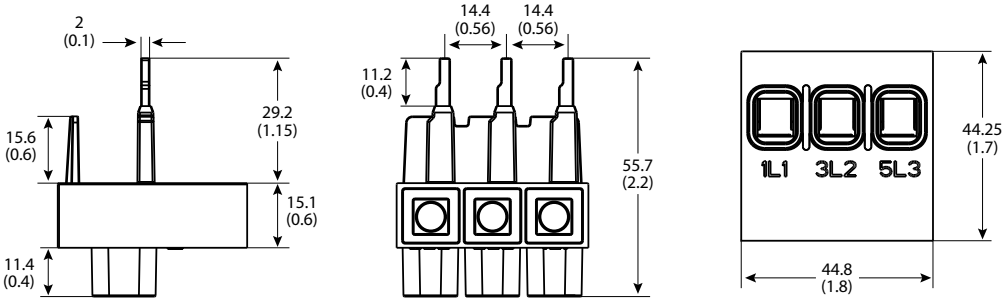

Terminal Cover, Cat. No. KT9-40-DBA

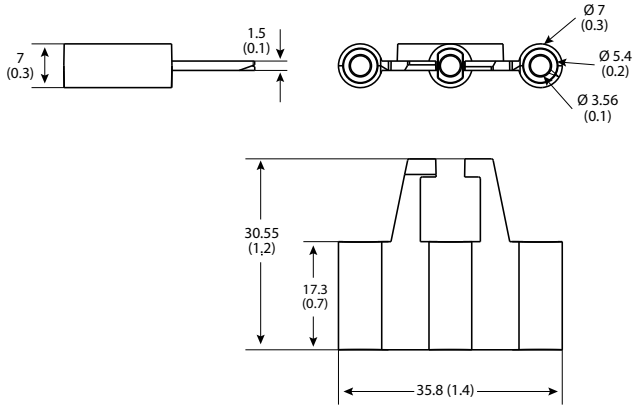

Supply Block, Cat. No. KT9-40-A2E

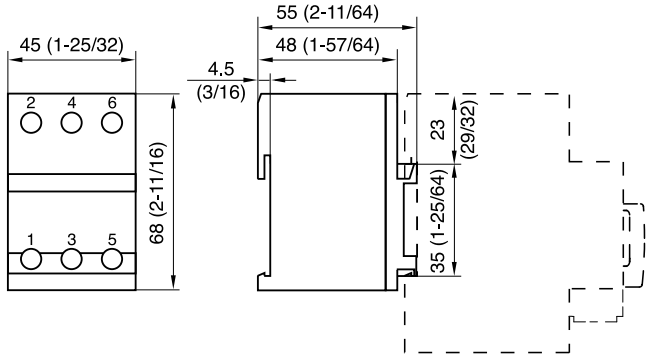

KT9-40-TE Type E adapter on Cat. No. KTA9-32S and KT_9-40H…

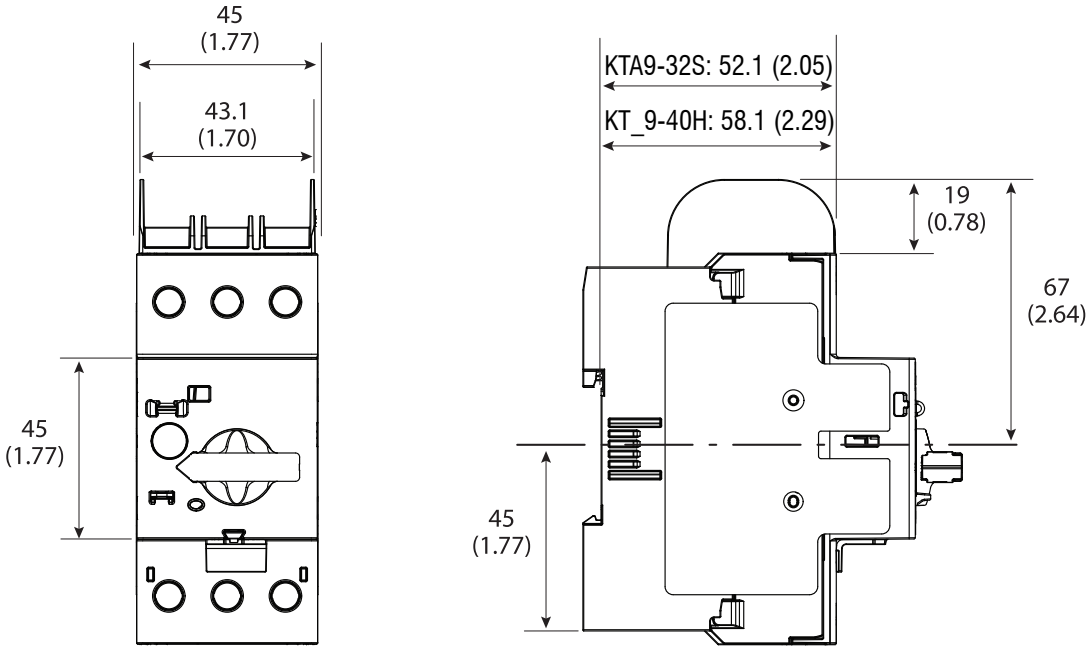

KT_7-45H Mounting Position / Safety Clearance

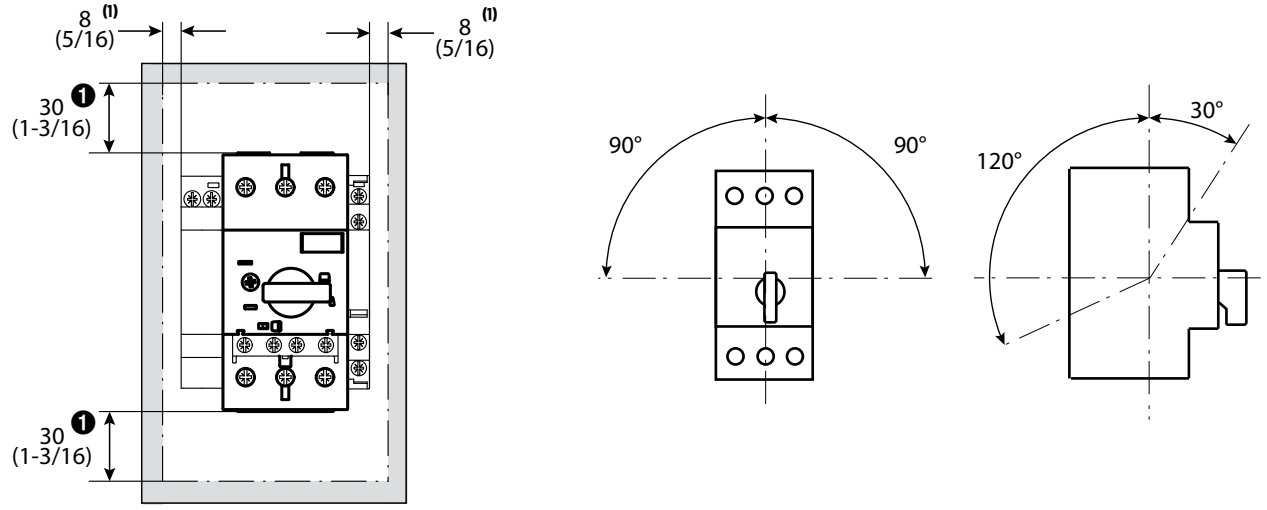

Motor Protection Circuit Breaker (F-Frame), Cat. No. Cat. No. KT_7-45H…

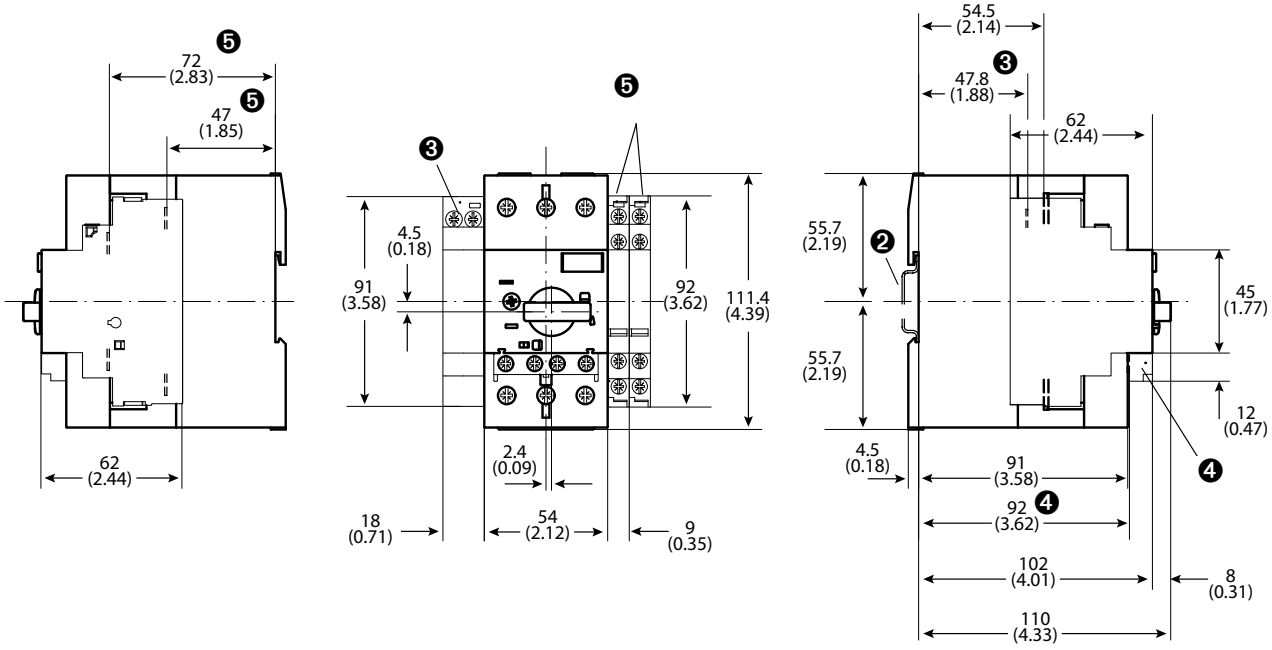

❶ Minimum distance to grounded parts or walls
❷ Mounting on 35 mm DIN Rail
❸ Undervoltage/shunt trip
❹ Auxiliary contact (front mounted)
❺ Auxiliary contact (side mounted)

KT7-45-TE Type E adapter on Cat. No. KT_7-45H…

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

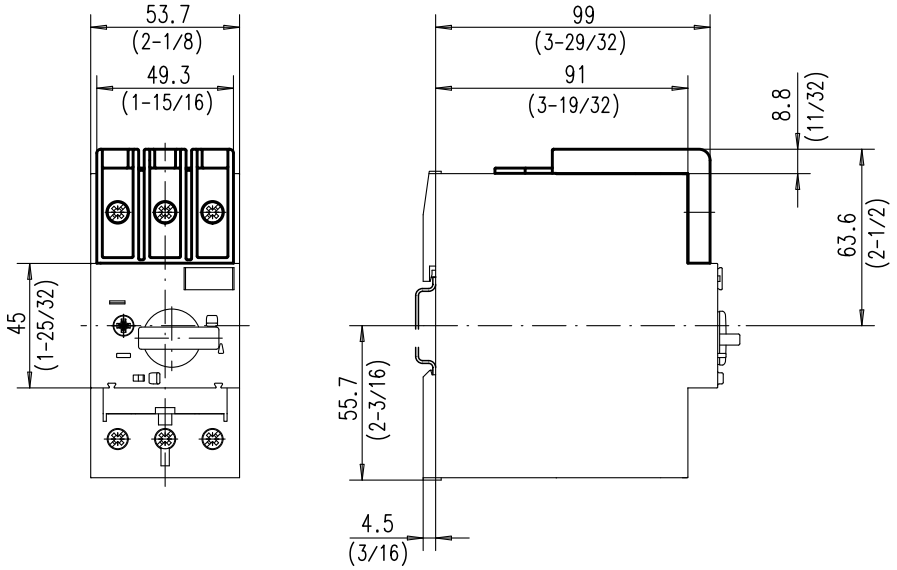

Screw Adapter, Cat. No. KT7-45-AS

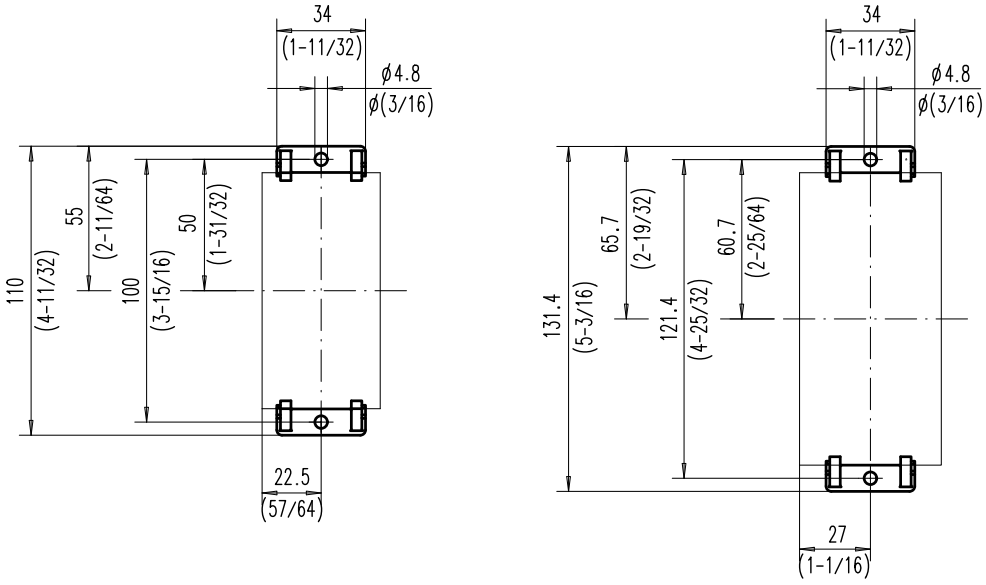

Notes

Series KTU9 UL489 Molded Case Circuit Breakers

Versatile, convenient and space saving… for a variety of applications

Sprecher+Schuh's KTU9 series of UL Molded Case Circuit Breakers are UL489 and CE listed for global applications. The current limiting circuit breaker provides fixed short circuit and overcurrent protection and offers high interrupting ratings for 2- and 3-pole devices from 0.5 to 40A. These Circuit breakers are 100% rated up to 10A.

Accessories are intelligently designed to be field installed. The compact busbars and supply blocks reduce wiring errors and installation labor cost. Connection modules for the CA7 Contactors simplify wiring and can reduce the number of DIN rails required, compacting panel space even further.

Advantages…

- Small foot print saves panel space, just 45 x 96 x 89 mm, up to 50% smaller than traditional MCCBs.
- Interrupt rating of 65kA at 480Y/277V may allow higher overall panel short circuit rating
- Up to 6 times higher interrupting rating vs. traditional miniature circuit breakers.

Ideal Applications…

- Feeder Circuits
  - Small Cabinets
  - Distribution panels
  - Branch circuit protection
  - Transformers
  - Heaters
- Control Circuits
  - Control Transformers
  - Power supplies
- Heating, air conditioning and refrigeration (HACR)
- High-intensity discharge
- Switching duty (SWD) 15 and 20 A

Compare these advanced features

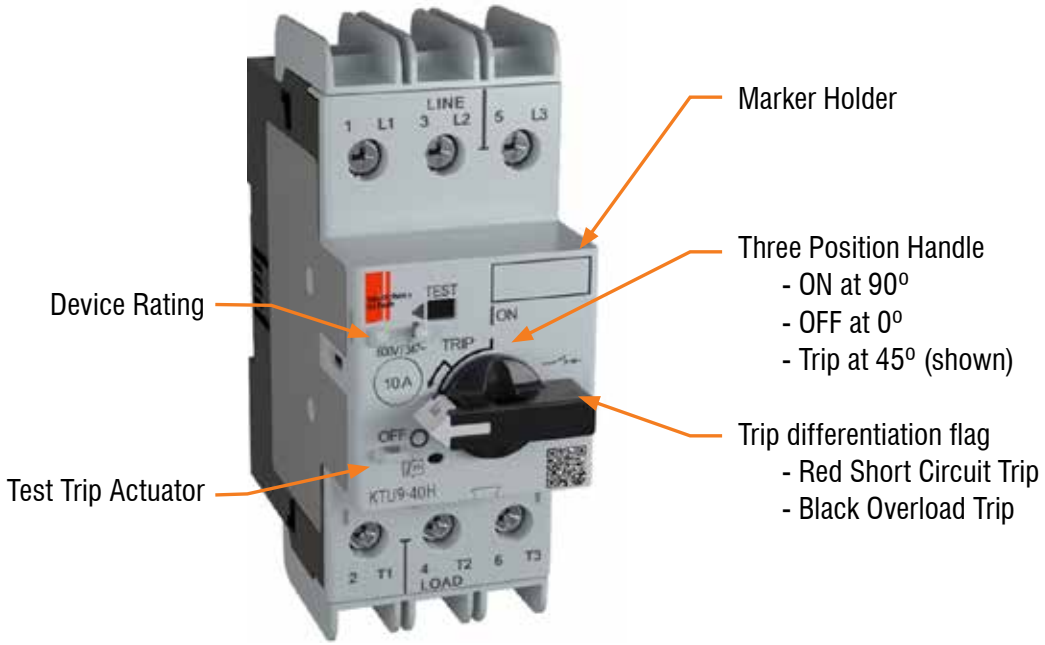

KTU9 Circuit Breaker, Fixed Thermal-Magnetic ❷

Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA]			Catalog Number
		240V	480Y/277V	600Y/347V	
KTU9-40H-2D — High Interrupting Capacity – 2-Pole					
0.5	15…20 x I_n	100	100	50	**KTU9-40H-2D-0.5** ❶
1.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-1** ❶
2.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-2** ❶
3.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-3** ❶
4.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-4** ❶
5.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-5** ❶
6.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-6** ❶
8.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-8** ❶
10.0	15…20 x I_n	100	100	50	**KTU9-40H-2D-10** ❶
12.0	15…20 x I_n	65	65	25	**KTU9-40H-2D-12**
15.0	15…20 x I_n	65	65	25	**KTU9-40H-2D-15**
20.0	15…20 x I_n	65	65	~	**KTU9-40H-2D-20**
25.0	15…20 x I_n	65	65	~	**KTU9-40H-2D-25**
30.0	15…20 x I_n	65	65	~	**KTU9-40H-2D-30**
35.0	14 x I_n	65	65	~	**KTU9-40H-2D-35**
40.0	12 x I_n	65	65	~	**KTU9-40H-2D-40**
KTU9-40H-3D — High Interrupting Capacity – 3-Pole					
0.5	15…20 x I_n	100	100	50	**KTU9-40H-3D-0.5** ❶
1.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-1** ❶
2.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-2** ❶
3.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-3** ❶
4.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-4** ❶
5.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-5** ❶
6.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-6** ❶
8.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-8** ❶
10.0	15…20 x I_n	100	100	50	**KTU9-40H-3D-10** ❶
12.0	15…20 x I_n	65	65	25	**KTU9-40H-3D-12**
15.0	15…20 x I_n	65	65	25	**KTU9-40H-3D-15**
20.0	15…20 x I_n	65	65	~	**KTU9-40H-3D-20**
25.0	15…20 x I_n	65	65	~	**KTU9-40H-3D-25**
30.0	15…20 x I_n	65	65	~	**KTU9-40H-3D-30**
35.0	14 x I_n	65	65	~	**KTU9-40H-3D-35**
40.0	12 x I_n	65	65	~	**KTU9-40H-3D-40**

Description

The KTU9 is a fixed trip, thermal-magnetic UL489 Molded Case Circuit Breaker.

KTU9-40H-3D

KTU9-40H-2D

❶ Suitable for continuous operation at 100% of rating only if used in minimum enclosure space of 250 x 175 x 150 mm (10 x 7 x 6 in).
❷ KTU9 has independent thermal elements suitable for power distribution applications (not two slide bar differential tripping).

Accessories available for KTU9

	KT9-P.. **Front/Side Mount Auxiliaries and Trip Contacts** 1-pole or 2-pole Side-mount not suitable for UL489 applications See pages F1.12-1.13		**KT9-KN, KT9-KRY or KT9-DS** See page F1.16
	KT9-UA Undervoltage Trips ❸ (UL 489 application up to 30 A) See page F1.14		**Handle Assemblies** **KT9-SY or KT9-SB** **KT9-HTN or KT9-HTRY ❷** See page F1.15
	**KT9-HT/HTL, KT9-S_/N_ & KT9-SHS Extension Shafts & Support** See page F1.15		**KT9-N45** **Screw Adaptor** See page F1.16

Extension Shaft Support Assembly
The KT9-SHS is recommended for handle shafts KT9-HT_ or KT9-S_/N_ in lengths greater than 200mm (7.8 inches).
See page F41

Remote Operation Application
The KTU9 3-Pole unit can be combined with CA7 using Connector Modules to achieve remote operation.
- For CA7-9…23 use KTU9-40H-PEC23

❶ Series B or later.
❷ Series E or later.
❸ Undervoltage Trip Connection Diagram



Connecting Modules *(for connecting KTU9 to CA7 AC coil, or CA7 Electronic DC coil contactors)*

Module	Description	For Connecting. . .	To Contactor. . .	Catalog Number
	Connecting Modules • 25 Amp maximum • Provides electrical and mechanical interconnection of KTU9 3-Pole and CA7 (with AC coils) or CA7-_E (with 12V or 24V Electronic DC coils) • KTU9 and Contactor mount on one DIN rail (see previous page for visual)	KTU9-40H	CA7-9..23	**KTU9-D-PEC23**

Compact Busbar System for KTU9

Accessory	Description	For Use With	Catalog Number
	**Compact Busbar — 45 mm Spacing (Rated 64 A)** • For use with front-mounted auxiliary contact Connects 2-KTU9s Connects 3-KTU9s Connects 4-KTU9s Connects 5-KTU9s (shown)	KTU9-40H-3D	**KTU9-D-DB-45-2** **KTU9-D-DB-45-3** **KTU9-D-DB-45-4** **KTU9-D-DB-45-5**
	Supply Block and Terminal • For power connection to Compact Busbar — 600V, KTU9-D…64A maximum • Top feed — overlaps commoning link • Meets requirements for terminal spacing from source • Compliant with UL489 Terminal Clearance standards	KTU9-40H-3D	**KTU9-D-A3E**

IEC Performance Data

(CSA C22.2, UL 489, IEC / EN 60947-1, -2 in connection with a short-circuit protection device

			KTU9-40H- 2 pole & 3 pole														
			0.5A	**1A**	**2A**	**3A**	**4A**	**5A**	**6A**	**8A**	**10A**	**12A**	**15A**	**20A**	**25A**	**30A**	**35A**	**40A**
Rated Operational Current I_n		[A]	0.5	1	2	3	4	5	6	8	10	12	15	20	25	30	35	40
Fixed Thermal Trip $I_r = I_n$		[A]	0.5	1	2	3	4	5	6	8	10	12	15	20	25	30	35	40
Fixed Magnetic Trip I_m =		[A]	15…20 x I_n															
Ultimate Short Circuit Breaking Capacity (50 Hz) I_{cu}	230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
	400/415V	[kA]	100	100	100	100	100	100	100	100	100	65	65	65	65	65	65	65
	500/525V	[kA]	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65
	690V	[kA]	50	50	18	18	18	18	18	10	10	10	10	10	10	10	10	10
Rated Service Short Circuit Breaking Capacity (50 Hz) I_{cs}	230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
	400/415V	[kA]	65	65	65	65	65	65	65	65	65	50	50	50	50	50	50	50
	500/525V	[kA]	65	65	65	65	65	65	65	65	65	50	50	50	25	25	25	25
	690V	[kA]	50	50	10	10	10	10	10	6	6	6	6	6	6	6	6	6

General Data

			KTU9-D
Number of Poles			2 and 3
Rated Insulation Voltage U_i	IEC, / EN	[V]	690
	UL, CSA	[V]	690
HACR Ratings	Suitable for continuous operation at 100% of rating only if used in enclosure space for	480Y/277V 600Y/347V	0.5…15 A, cubicle space 250 x 175 x 150 mm (10 x 7 x 6 in) 0.5…15 A, cubicle space 300 x 175 x 150mm (11.8 x 7 x 6in)
Rated Impulse Withstand Voltage U_{imp}	Pollution degree		3
	Main circuits U_{imp}/Overvoltage Category		6 kV/III
	Auxiliary circuits U_{imp} /Overvoltage Category		6 kV/III
	Safe separation between main and auxiliary circuits		up to 400V
Rated Frequency		[Hz]	50/60
Utilization Category	IEC 60947-2 (Circuit breaker)		A
Life Span	Mechanical	[operations]	100,000
	Electrical (I_e max.)	[operations]	10,000
	Switching Frequency	[operations/hour]	max. 25
Ambient Temperature	Storage	[°C (°F)]	-40…+80
	Operation	[°C (°F)]	-25…+60 (70 with 15% In current reduction) (-13…+140 °F [+158 with 15% In current reduction]}
Climate Resistance	Moisture / Heat Resistance	(600068-2-30)	23 °C (73 °F)/83% relative humidity and 40 °C (104 °F) /92% relative humidity, 56 cycles
	Dry Heat	(60086-2-2)	100 °C (212 °F), relative humidity < 50%, 7 days
	Moisture Heat	(60068-2-3)	40 °C (104 °F), relative humidity 93%, 56 days
Site Altitude		[m]	up to 2000 N.N. (6561 ft)
Protection Class			IP2X when wired
Resistance to Shock, Transport		(60068-2-27)	30G, 11 ms, all axes
Resistance to Vibration, Operation		(60068-2-6)	18 G
Overload Protection Characteristics			Yes per IEC/EN 60947-2, UL489, CSA 22.2
Ambient Temperature Compensation		[°C (°F)]	-25…+60 (-13…+140)
Phase-loss Protection			No
Short-circuit protection (Magnetic)			fixed setting 15…20 x In, (35 A - 14 x In and 40 A - 12 x In)
Backfeeding			Suitable for backfeeding up to 480Y/277V
Total Power loss P_v	at In max	[W]	7.5
Main Disconnect Switch Application			Yes, with accessories
HID (High Intensity Discharge) Listed			0.5…40 A
Switching Duty			15 A, 20 A
Heating, air conditioning and refrigeration (HACR)			0.5…40 A
Application Conditions	For utilization outside North America, assemblies (of products) shall comply to the IEC 61439-1 requirements KTU9 are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments.		
Standards Compliance			UL489; CSA C22.2 No. 5(1); IEC / EN 60947-1, -2
Certifications			CE; cULus Listed Circuit Breaker (pending)

Connection	No. of conductors	**KTU9 ≤ 15A**	**KTU9 > 15A**
Power Terminals			
Terminal Type		Screw Clamp up to 16 A, M4	Screw Clamp greater than 16 A, M4
Screwdriver		Pozidriv No.2/Blade No.3	Pozidriv No.2/Blade No.3
Solid or stranded 	1 conductor	1…6 mm²	1.5…10 mm²
	2 conductor	1…2.5 mm² 2.5…6 mm²	1.5…4 mm² 4…10 mm²
Flexible with ferrule (end sleeve)	1 conductor	1…6 mm²	1.5…10 mm²
	2 conductor	1…2.5 mm² 2.5…4 mm²	1.5…4 mm² 4…10 mm²
Finely stranded	1 conductor	1.5…6 mm²	2.5…10 mm²
	2 conductor	1.5…4 mm² 2.5…6 mm²	2.5…6 mm² 4…10 mm²
Cross section per UL/CSA solid, stranded	1 conductor	No. 14…10 AWG	No. 14…8 AWG
	2 conductor	No. 14…10 AWG	No. 14…10 AWG No. 12…8 AWG
Stripping length		10 mm (0.39 in.)	10 mm (0.39 in.)
Tightening torque	[Nm]/[lb-in.]	2...2.5 / 18...22	2…2.5/18…22

Time-Current Characteristic

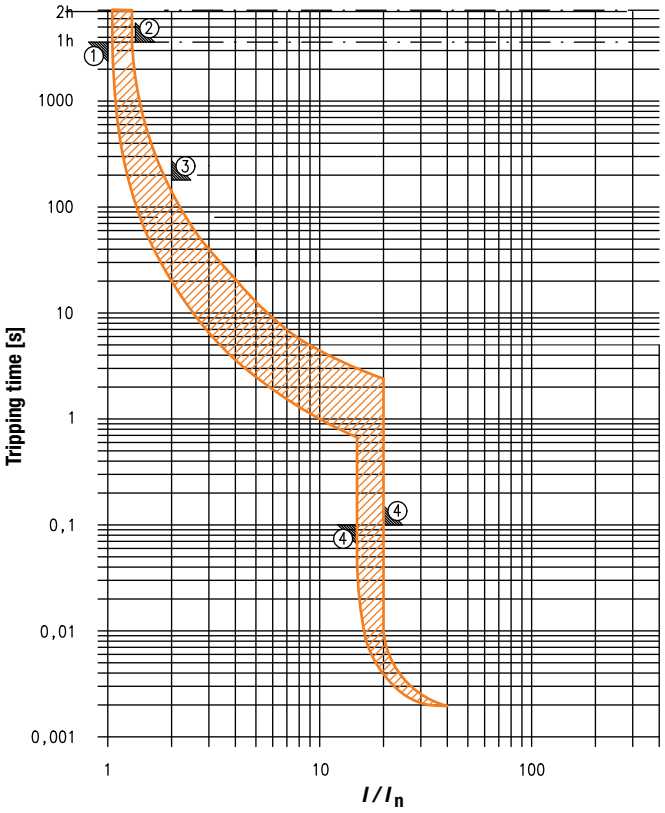

Tripping characteristic
acc. to UL 489 and IEC 60947-2
① conventional non-tripping current $I_{nt} = 1.0\ I_n$
② conventional tripping current $I_t = 1.35\ I_n : _t = <1h$
③ $2.0\ I_n : _t = 180s$ max.

Instantaneous tripping
acc. to UL 489 and IEC 60947-2
④ Trip Curve : 15…20 I_n

Cut-off Current ❶

KTU9-40H-D*-*
Max. Cut-Off Current at U_e=480V/60Hz

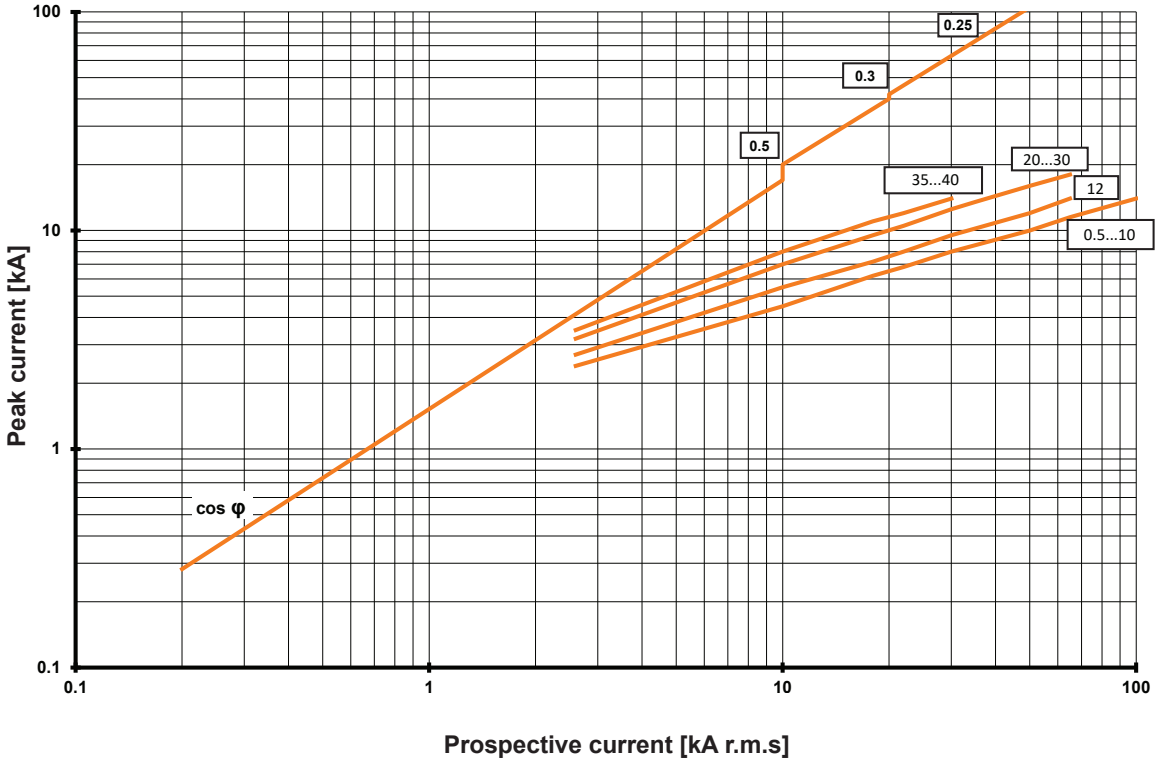

KTU9-40H-D*-*
Max. Let-Through-Energy at U_e=480V/60Hz

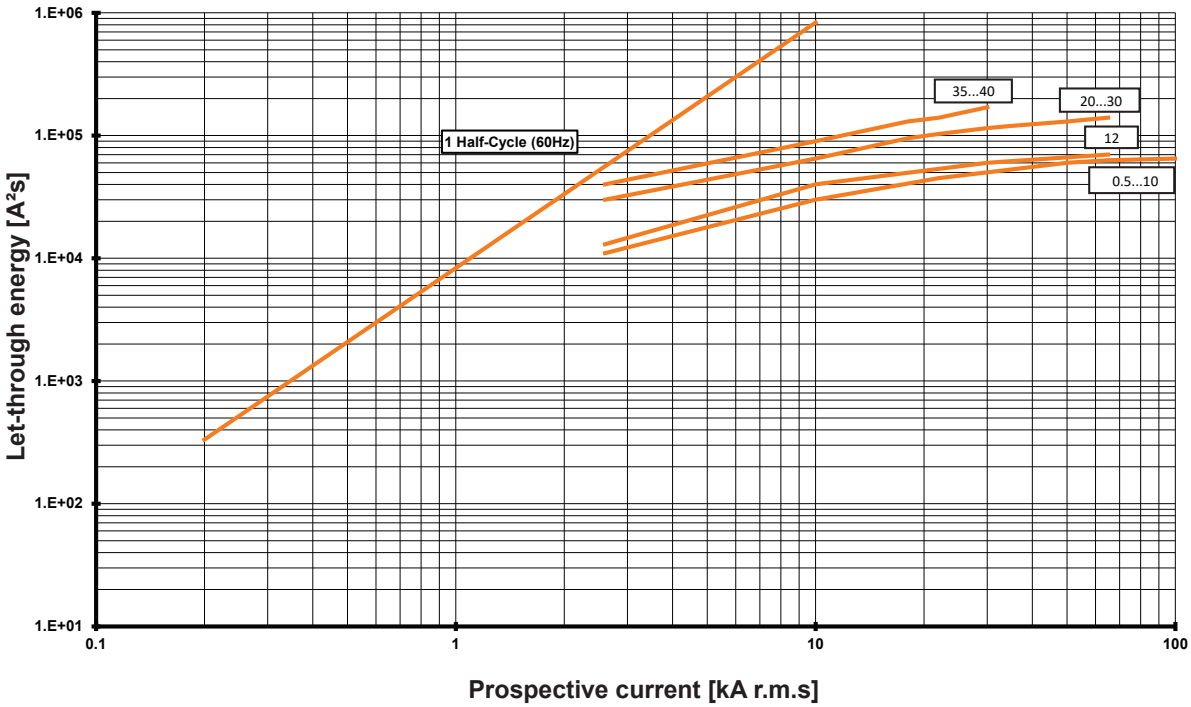

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Cut-off Current ❶

KTU9-40H-D*-*
Max. Cut-Off Current at U_e=600V/60Hz

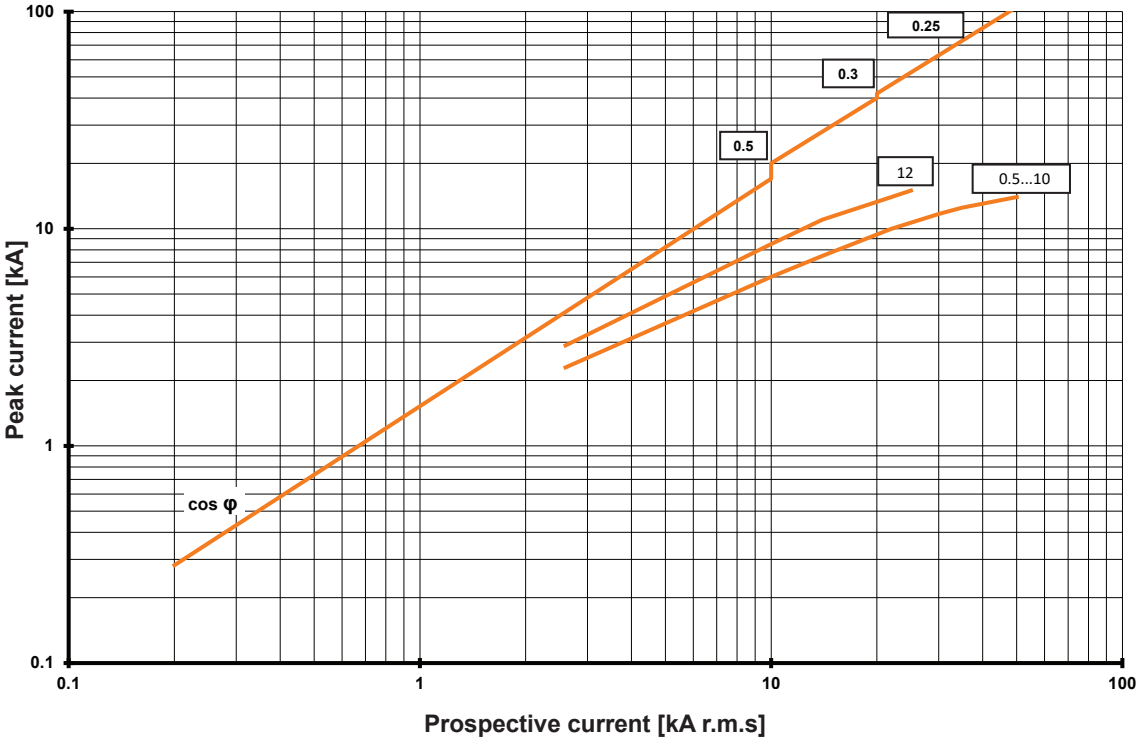

KTU9-40H-D*-*
Max. Let-Through-Energy at U_e=600V/60Hz

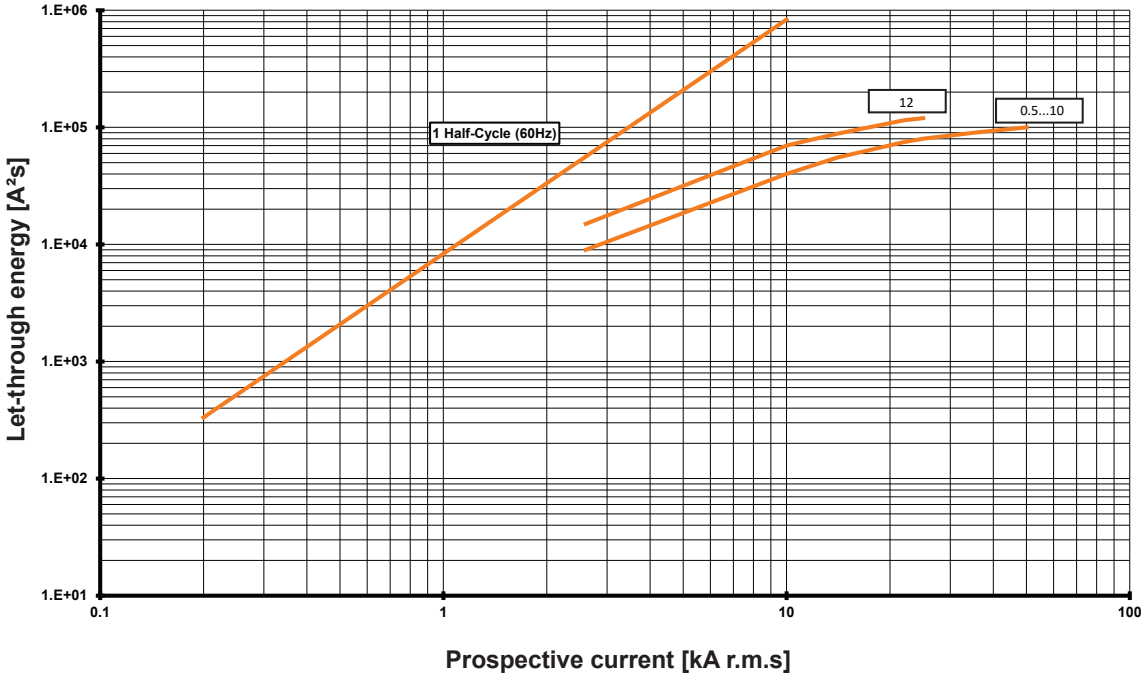

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

KTU9-40H Dimensions

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

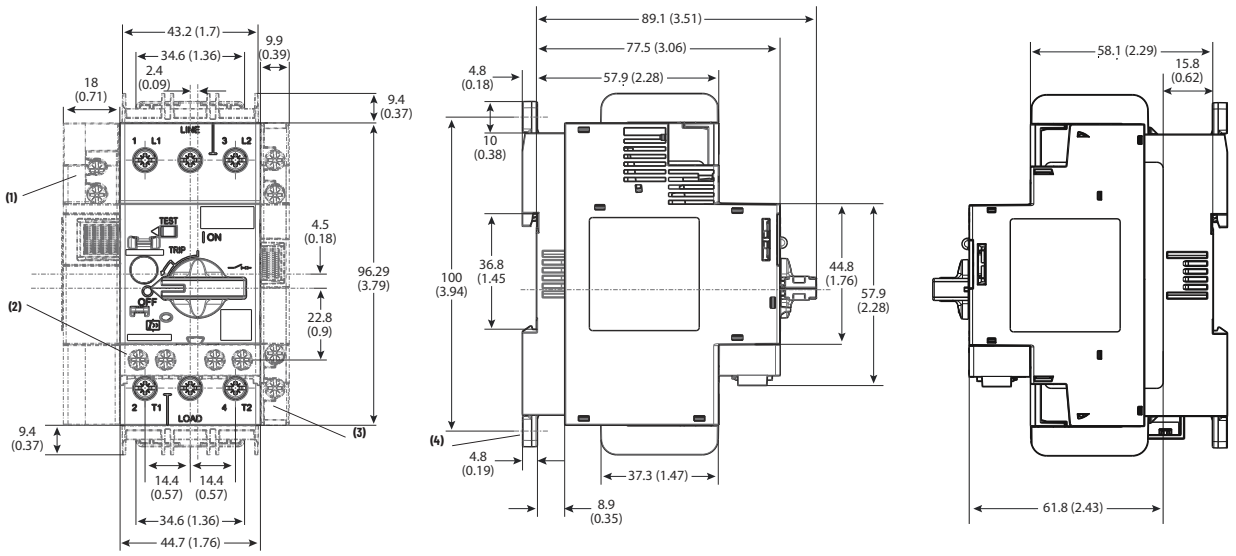

Note	Information
1	Undervoltage/shunt trip
2	Auxiliary contact (front mounted)
3	Auxiliary contact (side mounted)
4	Screw mounting adapter

KTU9 Wiring Diagram

3-Phase
KTU9-40H-3D

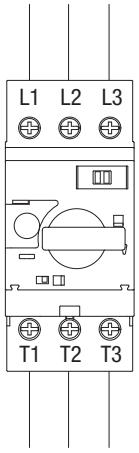

2-Phase
KTU9-40H-2D

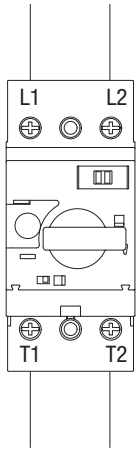

KTU9 with Screw Adaptor KT9-N45

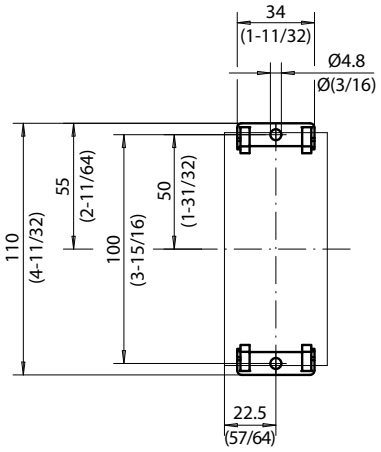

KTU9 Mounting Position

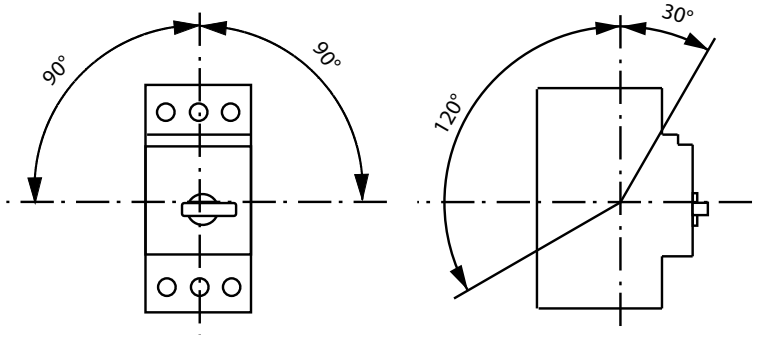

KTU9 Circuit Breaker Enclosure Requirements

Mounting Position and Spacing Requirements

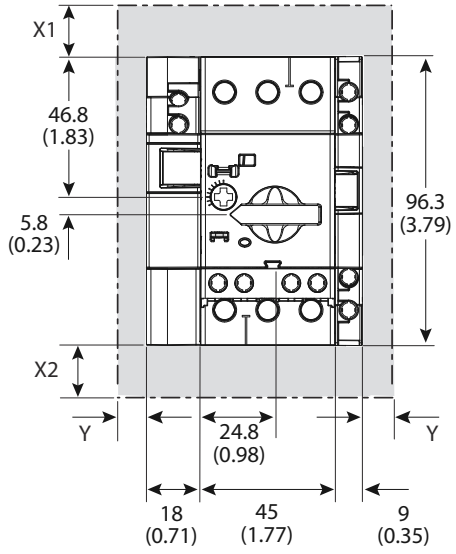

Voltage [V AC]	Minimum Distance to Grounded Parts or Walls [mm (in.)]		
	X1	X2	Y
400	30 (1-3/16)	30 (1-3/16)	9 (23/64)
500	30 (1-3/16)	30 (1-3/16)	9 (23/64)
690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)

Notes

Ecombo Starters

Save space, save money in individual or multi-motor starter applications

See our online white paper

Methods of Applying KT9

Motor Circuit Controllers

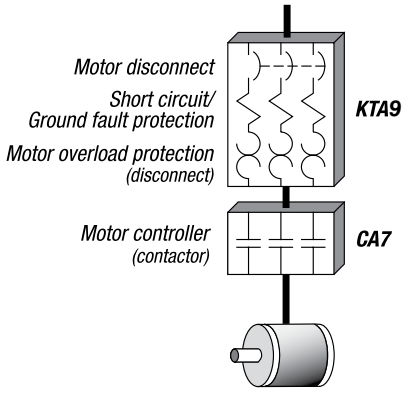

The Ecombo starter line combines a KTA9 self-protected Type E combination controller with a CA7 contactor to form a cost effective compact Type E/F alternative to traditional combination starters.

Sprecher + Schuh's Ecombo starters are the compact alternative to larger and higher priced combination starters. Both models consist of a KTA9 Motor Circuit Controller (cULus listed as a Type E, self-protected combination starter), assembled with a CA7 or CA8 contactor, which provides remote operation (Type E/F). Whether used as a standalone starter or in multi-motor starter applications, Ecombo starters save significant panel space and dollars over conventional combination starter alternatives.

Control and protection for most industrial applications

The Ecombo starter line covers motors to 40 amperes, while providing current limiting short circuit protection up to 65kA. Class 10 thermal overload protection is also assured with a very accurate current adjustment setting which is factory calibrated to the smallest and largest current the unit can handle. A "differential tripping" mechanism also provides accelerated tripping under single phase conditions (see illustration on page F3). Ecombo starters may be selected as Type 2 Coordinated per IEC 60947-4-1, or UL Construction Type E or F.

The Ecombo starter…

Ecombo starters (CLE) come standard with a KTA9 Motor Circuit Controller connected to Sprecher + Schuh's CA7 contactor (or CA8 mini contactor) through a specially designed connection module. The unit is DIN-rail mounted. Contactor coil connections are at the bottom of the starter to provide attractive and cost effective panel wiring. Ecombo starters may also be purchased with just three parts and assembled by the user to further increase economy. The CLE + O/L is a three component starter with a KTB9 controller, CA7 contactor, and a CEP7 solid state overload relay, pre-assembled on a bus bar module and ready to mount to a DIN rail or panel.

CLE Ecombo starter

CLE Three-Component starter

Reduce panel size, complexity and cost

Because KT9 Motor Circuit Controllers are UL listed as self-protected combination starters, NEC / CEC group motor rules are simplified substantially. In many cases, only a non-fused switch is required for panel disconnect. See our online white paper "Methods of Applying KT9 Motor Circuit Controllers", which explains applying KT9s in multi-motor starter applications.

Series	
CL	Non-reversing S+S
CLU	Reversing S+S

Mounting Style	
E	ECO (no mounting rail)
S	Sliding Din

Contactor Size	
809	9A
812	12A
709	9A
712	12A
716	16A
723	23A
730	30A
737	37A

Contactor Coil	
CA8	
024Z	24V 50Hz / 60Hz
0120	110V 50Hz / 120V 60Hz
0240	240V 50Hz / 60Hz
0600	525V 50Hz/ 600V60Hz CA
024D	24V DC
24DD	24V DC With Diode
CA7	
024Z	24V 50Hz / 60Hz
0120	110V 50Hz / 120V 60Hz
220W	208-220V 50Hz / 208-240V 60Hz
220W	240V 50Hz / 60Hz
0480	440V 50Hz / 480V 60Hz
0600	550V50Hz / 600V 60Hz
024E	24V DC

Contactor Aux	
01	1 N.C.
10	1 N.O.
02	2 N.C.
11	1 N.O. + 1 N.C.
12	1 N.O. + 2 N.C.
21	2 N.O. + 1 N.C.
22	2 N.O. + 2 N.C.
30	3 N.O.
31	3 N.O. + 1 N.C.
32	3 N.O. + 2 N.C.
33	3 N.O. + 3 N.C.

Breaker Frame	
C	KT9 C Frame MCPB only (32S)
D	KT9 D Frame MPCB or MCP (40H)

Breaker Current	
A16	0.1 - 0.16A
A25	0.16A - 0.25A
A40	0.25 - 0.40A
A63	0.40 - 0.63A
B10	0.63 - 1A
B16	1 - 1.6A
B25	1.6 - 2.5A
B40	2.5 - 4A
B63	4 - 6.3A
C10	6.3 - 10A
C16	10 - 16A
C20	14.5 - 20A
C25	18 - 25A
C29	23 - 29A
C32	26.5 - 32A
C36	30 - 36A
C40	34 - 40A

CL	E	-	709	0120	10	-	C	B40	B						
CLU	E	-	723	024E	22	-	C	C20	B						
CL	E	-	712	024Z	10	-	C	C16	B	-	FDB				

Options	
-KN	Black Lockable Knob
-KY	Red/Yellow Lockable Knob
-TE	Spacing Adapter for Type E
-W	Mounting Module
-JE	Interface Adapter

Breaker Aux Code	
X	w/o Aux. and Trip Contacts
A	1 NC
B	1 NO
C	1 NO + 1 NC
D	2 NO
E	2 NC
R	1 NC + 1 NO (SC+OL)
S	1 NO + 1 NO (SC+OL)
T	1 NO + 1 NC (SC+OL)
N	1 NO (SC+OL) + 1 NC (SC)

Overload Relay	
-	No Separate Overload Relay
FAB	0.1...0.5A Solid State
FBB	0.12...1.0A Solid State
FCB	1.0...5.0A Solid State
FDB	3.2...16A Solid State
FEB	5.4...27A Solid State
FED	5.4...27A Solid State
FFD	11...55A Solid State

This illustration is for reference only.
Turn to the appropriate page to determine specific catalog number.

❶ (D & E) designations indicate DC coil.

Non-Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP]				Catalog Number ❷
		200V	230V	460V	575V	
KTA9-32S – Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLE-809✱10-CA16X**
0.16…0.25A	3.5	~	~	~	~	**CLE-809✱10-CA25X**
0.25…0.40A	5.6	~	~	~	~	**CLE-809✱10-CA40X**
0.40…0.63A	8.8	~	~	~	~	**CLE-809✱10-CA63X**
0.63…1.0A	14	~	~	1/2	1/2	**CLE-809✱10-CB10X**
1.0…1.6A	22	~	~	3/4	3/4	**CLE-809✱10-CB16X**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLE-809✱10-CB25X**
2.5…4.0A	56	3/4	3/4	2	3	**CLE-809✱10-CB40X**
4.0…6.3A	88	1	1-1/2	3	5 ❻	**CLE-809✱10-CB63X**
6.3…10A	140	2	2	5	5 ❻	**CLE-809✱10-CC10X**
6.3…10A	140	2	2	5	7-1/2 ❻	**CLE-812✱10-CC10X**
10…16A	224	3	3	7-1/2	10 ❻	**CLE-812✱10-CC16X**

Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP]				Catalog Number ❷
		200V	230V	460V	575V	
KTA9-32S – Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLUE-809✱10-CA16X**
0.16…0.25A	3.5	~	~	~	~	**CLUE-809✱10-CA25X**
0.25…0.40A	5.6	~	~	~	~	**CLUE-809✱10-CA40X**
0.40…0.63A	8.8	~	~	~	~	**CLUE-809✱10-CA63X**
0.63…1.0A	14	~	~	1/2	1/2	**CLUE-809✱10-CB10X**
1.0…1.6A	22	~	~	3/4	3/4	**CLUE-809✱10-CB16X**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLUE-809✱10-CB25X**
2.5…4.0A	56	3/4	3/4	2	3	**CLUE-809✱10-CB40X**
4.0…6.3A	88	1	1-1/2	3	5 ❻	**CLUE-809✱10-CB63X**
6.3…10A	140	2	2	5	5 ❻	**CLUE-809✱10-CC10X**
6.3…10A	140	2	2	5	7-1/2 ❻	**CLUE-812✱10-CC10X**
10…16A	224	3	3	7-1/2	10 ❻	**CLUE-812✱10-CC16X**

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
024Z	**24V**	**24V**
0120	**110V**	**120V**
0240	240V	240V
0380 ❹	Use Coil Code 0400	
0400 ❹	400V	400V
0480	**440V**	**480V**
0575 ❺	Use Coil Code 0600	
0600 ❻	525V	600V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- CA8 Contactor
- Connecting Module (Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Can mount on one DIN-rail

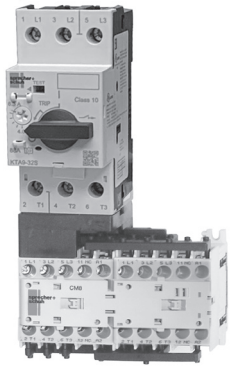

Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- One Reversing CAU8 Contactor with Mechanical Interlock (CM8)
- Connecting Module Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Reversing Power Wiring Kit (Cat.# CAUT8-PW)
- Can mount on one DIN-rail

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.
❸ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
❹ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
❺ Use this code for 575V applications.
❻ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Non-Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP]				Catalog Number ❷
		200V	230V	460V	575V	
KTA9-32S – Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLE-809∗D10-CA16X**
0.16…0.25A	3.5	~	~	~	~	**CLE-809∗D10-CA25X**
0.25…0.40A	5.6	~	~	~	~	**CLE-809∗D10-CA40X**
0.40…0.63A	8.8	~	~	~	~	**CLE-809∗D10-CA63X**
0.63…1.0A	14	~	~	1/2	1/2	**CLE-809∗D10-CB10X**
1.0…1.6A	22	~	~	3/4	3/4	**CLE-809∗D10-CB16X**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLE-809∗D10-CB25X**
2.5…4.0A	56	3/4	3/4	2	3	**CLE-809∗D10-CB40X**
4.0…6.3A	88	1	1-1/2	3	5 ❻	**CLE-809∗D10-CB63X**
6.3…10A	140	2	2	5	5 ❻	**CLE-809∗D10-CC10X**
6.3…10A	140	2	2	5	7-1/2 ❻	**CLE-812∗D10-CC10X**
10…16A	224	3	3	7-1/2	10 ❻	**CLE-812∗D10-CC16X**

Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP]				Catalog Number ❷
		200V	230V	460V	575V	
KTA9-32S – Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLUE-809∗D10-CA16X**
0.16…0.25A	3.5	~	~	~	~	**CLUE-809∗D10-CA25X**
0.25…0.40A	5.6	~	~	~	~	**CLUE-809∗D10-CA40X**
0.40…0.63A	8.8	~	~	~	~	**CLUE-809∗D10-CA63X**
0.63…1.0A	14	~	~	1/2	1/2	**CLUE-809∗D10-CB10X**
1.0…1.6A	22	~	~	3/4	3/4	**CLUE-809∗D10-CB16X**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLUE-809∗D10-CB25X**
2.5…4.0A	56	3/4	3/4	2	3	**CLUE-809∗D10-CB40X**
4.0…6.3A	88	1	1-1/2	3	5 ❻	**CLUE-809∗D10-CB63X**
6.3…10A	140	2	2	5	5 ❻	**CLUE-809∗D10-CC10X**
6.3…10A	140	2	2	5	7-1/2 ❻	**CLUE-812∗D10-CC10X**
10…16A	224	3	3	7-1/2	10 ❻	**CLUE-812∗D10-CC16X**

DC Coil Code	Voltage
012	12V
024	**24V ❹**
110	110V
125	125V
220	220V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- CA8 Contactor
- Connecting Module (Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Can mount on one DIN-rail

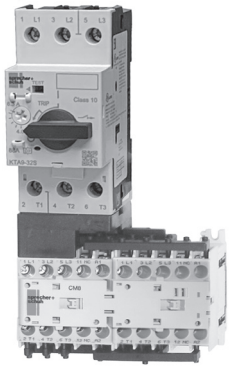

Includes:

- KTA9-32S (Standard Interrupting Capacity) Motor Controller
- One Reversing CAU8 Contactor with Mechanical Interlock (CM8)
- Connecting Module Cat.# KT9-32S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT9-40-TE)
- Reversing Power Wiring Kit (Cat.# CAUT8-PW)
- Can mount on one DIN-rail

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Does not include auxiliary contacts. See Factory Options on page F1.48 for additional auxiliary contact configurations.
❸ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
❹ Integrated surge suppressor for coil is available. See page F1.48 for options.
❺ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
❻ Use this code for 575V applications.
❼ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Non-Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ❷

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❶
KTA9-32S - Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLE-709✱10-CA16B**
0.16…0.25A	3.5	~	~	~	~	**CLE-709✱10-CA25B**
0.25…0.40A	5.6	~	~	~	~	**CLE-709✱10-CA40B**
0.40…0.63A	8.8	~	~	~	~	**CLE-709✱10-CA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLE-709✱10-CB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLE-709✱10-CB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLE-709✱10-CB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLE-709✱10-CB40B**
4.0…6.3A	88	1	1-1/2	3	5 ❹	**CLE-709✱10-CB63B**
6.3…10A	140	2	2	5	7-1/2 ❹	**CLE-709✱10-CC10B**
6.3…10A	140	3	3	7-1/2	7-1/2 ❹	**CLE-712✱10-CC10B**
10…16A	224	3	5	10	10 ❹	**CLE-716✱10-CC16B**
KTA9-40H – High Interrupting Capacity (14 x In)						
0.40…0.63A	8.8	~	~	~	~	**CLE-709✱10-DA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLE-709✱10-DB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLE-709✱10-DB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLE-709✱10-DB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLE-709✱10-DB40B**
4.0…6.3A	88	1	1-1/2	3	5	**CLE-709✱10-DB63B**
6.3…10A	140	2	2	5	7-1/2	**CLE-709✱10-DC10B**
6.3…10A	140	2	2	5	7-1/2	**CLE-712✱10-DC10B**
10…16A	224	3	5	10	10	**CLE-716✱10-DC16B**
14.5…20A	280	5	5	10	15 ❹	**CLE-723✱10-DC20B**
18…25A	350	5	7-1/2	15	20 ❹	**CLE-723✱10-DC25B**
23…29A	406	7-1/2	10	20	25 ❹	**CLE-730✱10-DC29B**
26.5…32A	448	7-1/2	10	20	30 ❹	**CLE-730✱10-DC32B**
30…36A	432	10	10	25	30 ❹	**CLE-737✱10-DC36B**
34…40A	480	10	10	25	30 ❹	**CLE-737✱10-DC40B**
KTA7-45H – High Interrupting Capacity (13 x In)						
6.3…10A	130	2	3	5	7-1/2	**CLE-730✱10-FC10B-W ❷**
10…16A	208	3	5	10	10	**CLE-730✱10-FC16B-W ❷**
14.5…20A	260	5	5	10	15	**CLE-730✱10-FC20B-W ❷**
18…25A	325	7-1/2	7-1/2	15	20	**CLE-730✱10-FC25B-W ❷**
23…32A	416	7-1/2	10	20	25	**CLE-730✱10-FC32B-W ❷**
32…45A	585	10	10	25	30	**CLE-737✱10-FC45B-W ❷**
32…45A	585	10	15	30	30	**CLE-743✱11-FC45C-W ❷ ❸**

For applications above 45 amps please consider open type combination starters on page C59.

Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- CA7 Contactor (AC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ❷

- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C26 to C29 and 45H models. See modifications on page F69.

Coil Codes (✱) ❶

AC Coil Code	Voltage Range 50 Hz	60 Hz
024Z	24V	24V
0120	**110V**	**120V**
220W	**200-220V**	**208-240V**
230Z	230V	230V
0277	240V	277V
0415	400-415V	~
0480 ❻	**440V**	**480V**
0600 ❻	550V	600V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A.
  Select Catalog Number KTA9-32S-4.0A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ Other voltages available, see Section A in this catalog.
❷ CLE-730…743 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 32S models add **-W** to end of catalog number. See page F69 for modifications.
❸ CLE-743 supplied with (1) NO and (1) NC front mount auxiliary.
❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Non-Reversing Ecombo Starters with DC Coil, Series CA7 Contactor ❷

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❶
KTA9-32S - Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLE-709✱E10-CA16B**
0.16…0.25A	3.5	~	~	~	~	**CLE-709✱E10-CA25B**
0.25…0.40A	5.6	~	~	~	~	**CLE-709✱E10-CA40B**
0.40…0.63A	8.8	~	~	~	~	**CLE-709✱E10-CA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLE-709✱E10-CB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLE-709✱E10-CB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLE-709✱E10-CB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLE-709✱E10-CB40B**
4.0…6.3A	88	1	1-1/2	3	5 ❹	**CLE-709✱E10-CB63B**
6.3…10A	140	2	2	5	7-1/2 ❹	**CLE-709✱E10-CC10B**
6.3…10A	140	3	3	7-1/2	7-1/2 ❹	**CLE-712✱E10-CC10B**
10…16A	224	3	5	10	10 ❹	**CLE-716✱E10-CC16B**
KTA9-40H – High Interrupting Capacity (14 x In)						
0.40…0.63A	8.8	~	~	~	~	**CLE-709✱E10-DA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLE-709✱E10-DB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLE-709✱E10-DB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLE-709✱E10-DB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLE-709✱E10-DB40B**
4.0…6.3A	88	1	1-1/2	3	5	**CLE-709✱E10-DB63B**
6.3…10A	140	2	2	5	7-1/2	**CLE-709✱E10-DC10B**
6.3…10A	140	2	2	5	7-1/2	**CLE-712✱E10-DC10B**
10…16A	224	3	5	10	10	**CLE-716✱E10-DC16B**
14.5…20A	280	5	5	10	15 ❹	**CLE-723✱E10-DC20B**
18…25A	350	5	7-1/2	15	20 ❹	**CLE-723✱E10-DC25B**
23…29A	406	7-1/2	10	20	25 ❹	**CLE-730✱E10-DC29B**
26.5…32A	448	7-1/2	10	20	30 ❹	**CLE-730✱E10-DC32B**
30…36A	432	10	10	25	30 ❹	**CLE-737✱E10-DC36B**
34…40A	480	10	10	25	30 ❹	**CLE-737✱E10-DC40B**
KTA7-45H – High Interrupting Capacity (13 x In)						
6.3…10A	130	2	3	5	7-1/2	**CLE-730✱E10-FC10B-W ❷**
10…16A	208	3	5	10	10	**CLE-730✱E10-FC16B-W ❷**
14.5…20A	260	5	5	10	15	**CLE-730✱E10-FC20B-W ❷**
18…25A	325	7-1/2	7-1/2	15	20	**CLE-730✱E10-FC25B-W ❷**
23…32A	416	7-1/2	10	20	25	**CLE-730✱E10-FC32B-W ❷**
32…45A	585	10	10	25	30	**CLE-737✱E10-FC45B-W ❷**
32…45A	585	10	15	30	30	**CLE-743✱E11-FC45C-W ❷ ❸**

For applications above 45 amps please consider open type combination starters on page C59.

Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- CA7 Contactor (DC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ❷

- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C26 to C29 and 45H models. See modifications on page F1.48.

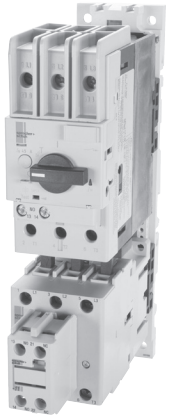

Coil Codes (✱) ❶

DC Coil Codes	Voltage
012	12V
024	**24V**
036	36-48V
048	48-72V
110	110-125V
220	220-250V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ Other voltages available, see Section A in this catalog.
❷ CLE-730…743 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 32S models add **-W** to end of catalog number. See page F1.48 for modifications.
❸ CLE-743 supplied with (1) NO and (1) NC front mount auxiliary.
❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ❷

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❶
KTA9-32S - Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLUE-709✱22-CA16B**
0.16…0.25A	3.5	~	~	~	~	**CLUE-709✱22-CA25B**
0.25…0.40A	5.6	~	~	~	~	**CLUE-709✱22-CA40B**
0.40…0.63A	8.8	~	~	~	~	**CLUE-709✱22-CA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLUE-709✱22-CB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLUE-709✱22-CB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLUE-709✱22-CB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLUE-709✱22-CB40B**
4.0…6.3A	88	1	1-1/2	3	5 ❹	**CLUE-709✱22-CB63B**
6.3…10A	140	2	2	5	7-1/2 ❹	**CLUE-709✱22-CC10B**
6.3…10A	140	3	3	7-1/2	7-1/2 ❹	**CLUE-712✱22-CC10B**
10…16A	224	3	5	10	10 ❹	**CLUE-716✱22-CC16B**
KTA9-40H – High Interrupting Capacity (14 x In)						
0.40…0.63A	8.8	~	~	~	~	**CLUE-709✱22-DA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLUE-709✱22-DB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLUE-709✱22-DB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLUE-709✱22-DB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLUE-709✱22-DB40B**
4.0…6.3A	88	1	1-1/2	3	5	**CLUE-709✱22-DB63B**
6.3…10A	140	2	2	5	7-1/2	**CLUE-709✱22-DC10B**
6.3…10A	140	2	2	5	7-1/2	**CLUE-712✱22-DC10B**
10…16A	224	3	5	10	10	**CLUE-716✱22-DC16B**
14.5…20A	280	5	5	10	15 ❹	**CLUE-723✱22-DC20B**
18…25A	350	5	7-1/2	15	20 ❹	**CLUE-723✱22-DC25B**
23…29A	406	7-1/2	10	20	25 ❹	**CLUE-730✱22-DC29B** ❷
26.5…32A	448	7-1/2	10	20	30 ❹	**CLUE-730✱22-DC32B** ❷
30…36A	432	10	10	25	30 ❹	**CLUE-737✱22-DC36B** ❷
34…40A	480	10	10	25	30 ❹	**CLUE-737✱22-DC40B** ❷
KTA7-45H – High Interrupting Capacity (13 x In)						
6.3…10A	130	2	3	5	7.5	**CLUE-730✱22-FC10B-W** ❷
10…16A	208	3	5	10	10	**CLUE-730✱22-FC16B-W** ❷
14.5…20A	260	5	5	10	15	**CLUE-730✱22-FC20B-W** ❷
18…25A	325	7.5	7.5	15	20	**CLUE-730✱22-FC25B-W** ❷
23…32A	416	7.5	10	20	25	**CLUE-730✱22-FC32B-W** ❷
32…45A	585	10	10	25	30	**CLUE-737✱22-FC45B-W** ❷
32…45A	585	10	15	30	30	**CLUE-743✱22-FC45C-W** ❷❸

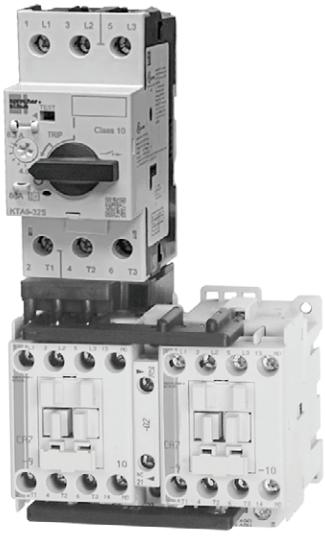

Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- Two CA7 Contactors (AC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ❷

- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C29...C40 and 45H models. See modifications on page F69.

Coil Codes (✱) ❶

AC Coil Code	Voltage Range 50 Hz	60 Hz
024Z	24V	24V
0120	**110V**	**120V**
220W	**200-220V**	**208-240V**
230Z	230V	230V
0277	240V	277V
0415	400-415V	~
0480 ❻	**440V**	**480V**
0600 ❻	550V	600V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ Other voltages available, see Section A in this catalog.
❷ CLUE-730…743 with KTA9-40H and KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17
❸ CLUE-743 supplied with (1) NO and (1) NC front mount auxiliary per contactor.
❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Reversing Ecombo Starters with DC Coil, Series CA7 Contactor ❷

Thermal Trip [A]	Magnetic Trip [A]	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❶
KTA9-32S - Standard Interrupting Capacity (14 x In)						
0.10…0.16A	2.2	~	~	~	~	**CLUE-709✱E22-CA16B**
0.16…0.25A	3.5	~	~	~	~	**CLUE-709✱E22-CA25B**
0.25…0.40A	5.6	~	~	~	~	**CLUE-709✱E22-CA40B**
0.40…0.63A	8.8	~	~	~	~	**CLUE-709✱E22-CA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLUE-709✱E22-CB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLUE-709✱E22-CB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLUE-709✱E22-CB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLUE-709✱E22-CB40B**
4.0…6.3A	88	1	1-1/2	3	5 ❹	**CLUE-709✱E22-CB63B**
6.3…10A	140	2	2	5	7-1/2 ❹	**CLUE-709✱E22-CC10B**
6.3…10A	140	3	3	7-1/2	7-1/2 ❹	**CLUE-712✱E22-CC10B**
10…16A	224	3	5	10	10 ❹	**CLUE-716✱E22-CC16B**
KTA9-40H – High Interrupting Capacity (14 x In)						
0.40…0.63A	8.8	~	~	~	~	**CLUE-709✱E22-DA63B**
0.63…1.0A	14	~	~	1/2	1/2	**CLUE-709✱E22-DB10B**
1.0…1.6A	22	~	~	3/4	3/4	**CLUE-709✱E22-DB16B**
1.6…2.5A	35	1/2	1/2	1	1-1/2	**CLUE-709✱E22-DB25B**
2.5…4.0A	56	3/4	3/4	2	3	**CLUE-709✱E22-DB40B**
4.0…6.3A	88	1	1-1/2	3	5	**CLUE-709✱E22-DB63B**
6.3…10A	140	2	2	5	7-1/2	**CLUE-709✱E22-DC10B**
6.3…10A	140	2	2	5	7-1/2	**CLUE-712✱E22-DC10B**
10…16A	224	3	5	10	10	**CLUE-716✱E22-DC16B**
14.5…20A	280	5	5	10	15 ❹	**CLUE-723✱E22-DC20B**
18…25A	350	5	7-1/2	15	20 ❹	**CLUE-723✱E22-DC25B**
23…29A	406	7-1/2	10	20	25 ❹	**CLUE-730✱E22-DC29B** ❷
26.5…32A	448	7-1/2	10	20	30 ❹	**CLUE-730✱E22-DC32B** ❷
30…36A	432	10	10	25	30 ❹	**CLUE-737✱E22-DC36B** ❷
34…40A	480	10	10	25	30 ❹	**CLUE-737✱E22-DC40B** ❷
KTA7-45H – High Interrupting Capacity (13 x In)						
6.3…10A	130	2	3	5	7.5	**CLUE-730✱E22-FC10B-W** ❷
10…16A	208	3	5	10	10	**CLUE-730✱E22-FC16B-W** ❷
14.5…20A	260	5	5	10	15	**CLUE-730✱E22-FC20B-W** ❷
18…25A	325	7.5	7.5	15	20	**CLUE-730✱E22-FC25B-W** ❷
23…32A	416	7.5	10	20	25	**CLUE-730✱E22-FC32B-W** ❷
32…45A	585	10	10	25	30	**CLUE-737✱E22-FC45B-W** ❷
32…45A	585	10	15	30	30	**CLUE-743✱E22-FC45C-W** ❷❸

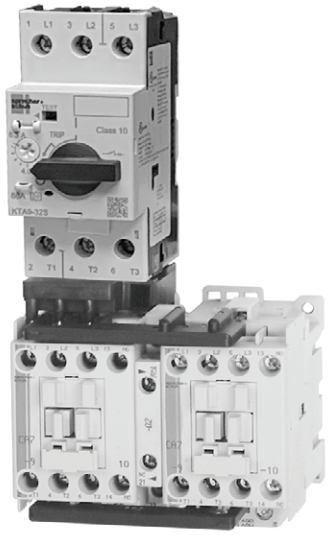

Includes:

- KT9 Motor Controller with 1 NO Auxiliary Contact
- Two CA7 Contactors (DC)
- Connecting Module (Cat.# KT9-32S or 40H-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ❷

- Type W Mounting Module is optional on 32S & 40H. Type W Module is standard on C29...C40 and 45H models. See modifications on page F1.48.

Coil Codes (✱) ❶

DC Coil Codes	Voltage
012	12V
024	**24V**
036	36-48V
048	48-72V
110	110-125V
220	220-250V

Horsepower ratings shown in the tables are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA9-32S-4.0A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ Other voltages available, see Section A in this catalog.
❷ CLUE-730…743 with KTA9-40H and KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17
❸ CLUE-743 supplied with (1) NO and (1) NC front mount auxiliary per contactor.
❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

CLE and CLUE Modifications ❸

Modification	Change Last Digit in Catalog Number to: ❶
KT9 Auxiliary (Front Mount 250VAC max.) and Trip Contacts	
Auxiliary Contact 1 NO	**B**
Auxiliary Contact 1 NC	**A**
Auxiliary Contact 1 NO + 1 NC	**C**
Auxiliary Contact 2 NO	**D**
1 NO SC or OL + 1 NC Auxiliary Contact	**R**
1 NO SC or OL + 1 NO Auxiliary Contact	**S**
1 NC SC or OL + 1 NO Auxiliary Contact	**T**
KT9 Auxiliary (Side Mount 600VAC max.) and Trip Contacts	
Auxiliary Contact 2 NC	**E**

CLE and CLUE Additions ❸

Add desired suffix AFTER auxiliary contact option code.

Addition	Add Suffix to Catalog Number:
Accessories	
Electronic Interfaces (CA7)	**-JE** ❷
Lockable Twist Knob (KT9) - Black	**-KN**
Lockable Twist Knob (KT9) - Red/Yellow	**-KY**
Type W Mounting Module for CLE-709…723 includes 45mm short module (W-32489)	**-W**
Type W Mounting Module for CLUE-709… 723 includes 45mm (W-32849) and 54mm (W-32490) short module	**-W**

❶ For CLE-8… or CLUE-8… , change last digit "X" to one of the modifications listed. Example: – CLE-809✱10-CA16X changes to CLE-809✱10-CA16B. For CLE-7… or CLUE-7… , change last digits "B" to one of the modifications listed. Example: CLE-709✱10-CA16B changes to CLE-709✱10-CA16C.

❷ CRI7E-24 will be used. CRI7E-12 by special order only.

❸ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.

Non-Reversing 3-Component Ecombo Starters ❷❸

Rated Oper. Current [A] ❹	Overload Adj. Range [A]	Magnetic Trip [A]	Typical Three Phase [HP]				Catalog Number ❶
			200V	230V	460V	575V	
KTB9-40H – High Interrupting Capacity (14 x In)							
0.63	1.0...5.0	8.8	~	~	~	~	**CLE-709✱10-DA63B-FCB**
1.0	1.0...5.0	14	~	~	1/2	1/2	**CLE-709✱10-DB10B-FCB**
1.6	1.0...5.0	22	~	~	3/4	3/4	**CLE-709✱10-DB16B-FCB**
2.5	1.0...5.0	35	1/2	1/2	1	1-1/2	**CLE-709✱10-DB25B-FCB**
4.0	1.0...5.0	52	3/4	3/4	2	3	**CLE-709✱10-DB40B-FCB**
6.3	3.2...16	88	1	1-1/2	3	5	**CLE-709✱10-DB63B-FDB**
10	3.2...16	130	2	2	5	7-1/2	**CLE-709✱10-DC10B-FDB**
16	5.4...27	208	3	3	7-1/2	10	**CLE-712✱10-DC16B-FEB**
20	5.4...27	280	5	5	10	~	**CLE-723✱10-DC20B-FEB**
25	5.4...27	325	5	7-1/2	15	~	**CLE-723✱10-DC25B-FEB**
29	11...55	406	7-1/2	10	20	~	**CLE-730✱10-DC29B-FFD**
32	11...55	448	7-1/2	10	20	~	**CLE-737✱10-DC32B-FFD**
KTB7-45H – High Interrupting Capacity (13 x In)							
25	5.4…27	325	5	7-1/2	15	20	**CLE-730✱10-FC25B-FED**
32	11…55	416	7-1/2	10	20	25	**CLE-730✱10-FC32B-FFD**
32	11…55	416	7-1/2	10	20	25	**CLE-737✱10-FC32B-FFD**
45	11…55	585	10	10	25	30	**CLE-737✱10-FC45B-FFD**
45	11…55	585	10	15	30	~	**CLE-743✱11-FC45C-FFD**

Includes:

- KTB9 Motor Controller
- CA7 Contactor (AC)
- CEP7 Solid State Overload Relay
- KT9 Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 40H or 45H Frame Units as required from page F17
- See page F72 for Factory Options

Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
024Z	24V	24V
0120	**110V**	**120V**
220W	**200-220V**	**208-240V**
230Z	230V	230V
0277	240V	277V
0415	400-415V	~
0480 ❺	**440V**	**480V**
0600 ❺	550V	600V

❶ Other voltages available, see Section A in this catalog.

❷ All CLE are supplied with Auxiliary Contacts for customer use as follows;
CLE-709…723 (1) NO Internal Mount
CLE-730…737 (1) NO Side Mount
CLE-743 (1) NO & (1) NC Front Mount
All KTB9s are supplied with (1) NO auxiliary contact, which should be used in series with the NC contact on the overload (95-96).

❸ Horsepower ratings shown in tables are for reference only. ***The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.***

❹ The KTB9 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a shortcircuit. A separate Sprecher + Schuh CEP7-1EF overload relay with selectable trip class should be used to protect the motor against overload. In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (Ie) of the motor FLA must be multiplied by the following factors for selection of the KTB9 Motor Circuit Controller KTB9-40H and KTB7-45H.
Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.7
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB9.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

Reversing 3-Component Ecombo Starters ❷❸❹

Rated Oper. Current [A] ❺	Overload Adj. Range [A]	Magnetic Trip [A]	Typical Three Phase [HP]				Catalog Number ❶❸❻
			200V	230V	460V	575V	
KTB9-40H – High Interrupting Capacity (14 x In)							
0.63	1.0...5.0	8.8	~	~	~	~	**CLUE-709✱10-DA63B-FCB**
1.0	1.0...5.0	14	~	~	1/2	1/2	**CLUE-709✱10-DB10B-FCB**
1.6	1.0...5.0	22	~	~	3/4	3/4	**CLUE-709✱10-DB16B-FCB**
2.5	1.0...5.0	35	1/2	1/2	1	1-1/2	**CLUE-709✱10-DB25B-FCB**
4.0	1.0...5.0	52	3/4	3/4	2	3	**CLUE-709✱10-DB40B-FCB**
6.3	3.2...16	88	1	1-1/2	3	5	**CLUE-709✱10-DB63B-FDB**
10	3.2...16	130	2	2	5	7-1/2	**CLUE-709✱10-DC10B-FDB**
16	5.4...27	208	3	3	7-1/2	10	**CLUE-712✱10-DC16B-FEB**
20	5.4...27	280	5	5	10	~	**CLUE-723✱10-DC20B-FEB**
25	5.4...27	325	5	7-1/2	15	~	**CLUE-723✱10-DC25B-FEB**
29	11...55	406	7-1/2	10	20	~	**CLUE-730✱10-DC29B-FFD**
32	11...55	448	7-1/2	10	20	~	**CLUE-737✱10-DC32B-FFD**
KTB7-45H – High Interrupting Capacity (13 x In)							
25	5.4…27	325	5	7-1/2	15	20	**CLUE-730✱22-FC25B-FED**
32	11…55	416	7-1/2	10	20	25	**CLUE-730✱22-FC32B-FFD**
32	11…55	416	7-1/2	10	20	25	**CLUE-737✱22-FC32B-FFD**
45	11…55	585	10	10	25	30	**CLUE-737✱22-FC45B-FFD**
45	11…55	585	10	15	30	~	**CLUE-743✱22-FC45B-FFD**

Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
024Z	24V	24V
0120	**110V**	**120V**
220W	**200-220V**	**208-240V**
230Z	230V	230V
0277	240V	277V
0415	400-415V	~
0480 ❺	**440V**	**480V**
0600 ❺	550V	600V

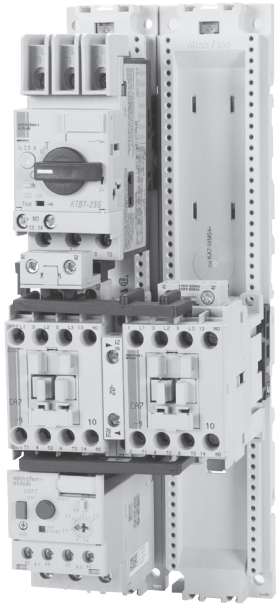

Includes:

- KTB9 Motor Controller
- CAU7 Reversing Contactor (AC)
- CEP7 Solid State Overload Relay
- KT9 Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 40H or 45H Frame Units as required from page F17
- See page F72 for Factory Options

❶ Other voltages available, see Section A in this catalog.
❷ All CLUE are supplied with Auxiliary Contacts for customer use as follows;
CLUE-709…723 (1) NO Internal Mount
CLUE-730…737 (1) NO Side Mount
CLUE-743 (1) NO & (1) NC Front Mount
CM7-02 interlock (2) NC (Electrical Interlocks)
All KTB9s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
❸ All CAU7 reversing contactors are supplied with CM7-02, including (2) NC contacts for electronic interlocking (not available for customer use).
❹ Horsepower ratings shown in tables are for reference only. ***The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.***
❺ The KTB9 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-1EF overload relay with selectable trip class should be used to protect the motor against overload. In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (Ie) of the motor FLA must be multiplied by the following factors for selection of the KTB9 Motor Circuit Controller KTB9-40H and KTB7-45H.
Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73
❻ The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB9.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

KT9 Assembly – Application Rating Chart (Ratings are dependent on type of application) ❶

KT9	UL 60947-4-1						UL Type 4-1 Type F		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max. Short-Circuit Current [kA]		Max. Short-Circuit Current [kA]		Minimum Contactor Size	Max. Short-Circuit Current [kA]	
			480V	600V	480V	600V		480Y/277V ❶	600Y/347V ❶
KTA9-32S + CA7 UL Assemblies (CLE) / (14 x In)									
KTA9-32S-0.16A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-32S-0.25A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-32S-0.40A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-32S-0.63A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-32S-1.0A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-32S-1.6A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-32S-2.5A	450	CA7-9	65	30	65	30	CA7-9	65	30
KTA9-32S-4.0A	450	CA7-9	65	30	65	30	CA7-9	65	30
KTA9-32S-6.3A	450	CA7-9	65	30	65	30	CA7-9	65	~
KTA9-32S-10A	450	CA7-9	65	30	65	30	CA7-9	65	~
KTA9-32S-16A	450	CA7-12	30	30	30	30	CA7-12	30	~
KTA9-32S-20A	450	CA7-23	30	30	30	10	~	~	~
KTA9-32S-25A	450	CA7-23	30	18	10	5	~	~	~
KTA9-32S-25A	450	CA7-30	30	18	30	5	~	~	~
KTA9-32S-29A	450	CA7-30	30	10	10	~	~	~	~
KTA9-32S-32A	450	CA7-37	30	10	10	~	~	~	~
KTA9-40H + CA7 UL Assemblies (CLE) / (14 x In)									
KTA9-40H-0.63A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-40H-1.0A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-40H-1.6A	450	CA7-9	65	50	65	50	CA7-9	65	50
KTA9-40H-2.5A	450	CA7-9	65	30	65	30	CA7-9	65	30
KTA9-40H-4.0A	450	CA7-9	65	30	65	30	CA7-9	65	30
KTA9-40H-6.3A	450	CA7-9	65	30	65	30	CA7-9	65	30
KTA9-40H-10A	450	CA7-9	65	30	65	30	CA7-9	65	30
KTA9-40H-16A	450	CA7-12	65	30	65	30	CA7-12	65	30
KTA9-40H-20A	450	CA7-23	65	30	65	30	CA7-23	65	~
KTA9-40H-25A	450	CA7-23	50	30	50	30	CA7-23	50	~
KTA9-40H-29A	450	CA7-30	50	30	50	30	CA7-30	50	~
KTA9-40H-32A	450	CA7-37	50	30	50	18	CA7-37	30	~
KTA9-40H-36A	450	CA7-37	30	30	30	18	CA7-37	30	~
KTA9-40H-40A	450	CA7-37	30	30	30	18	CA7-37	30	~
KTA7-45H + CA7 UL Assemblies (CLE) / (13 x In)									
KTA7-45H-10A	600	CA7-30	65	30	65	30	CA7-30	65	30
KTA7-45H-16A	600	CA7-30	65	30	65	30	CA7-30	65	30
KTA7-45H-20A	600	CA7-30	65	30	65	30	CA7-30	65	30
KTA7-45H-25A	600	CA7-30	65	30	65	30	CA7-30	65	30
KTA7-45H-32A	600	CA7-30	65	30	65	30	CA7-30	65	30
KTA7-45H-45A	600	CA7-37	65	18	65	18	CA7-37	65	~

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

IEC 60947-4-1, Type 2 Coordination Ratings, MPSDs with CA7 series contactors

Cat. No.			IEC 60947-4-1- Type 2 Coordination					
			400V		480V		600V	
Standard Motor Protection	High Inrush Motor Protection	Motor Circuit Protection	Max Short-circuit Current [kA]	Min Contactor Size ❶	Max Short-circuit Current [kA]	Min Contactor Size ❶	Max Short-circuit Current [kA]	Min Contactor Size ❶
KT_9 C-frame, Adjustable Thermal/Fixed Magnetic (14 x In)								
KTA9-32S-0.16A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-0.25A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-0.40A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-0.63A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-1.0A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-1.6A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-2.5A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-4.0A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-6.3A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-10A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-16A	~	~	50	CA7-30	~	~	~	~
KTA9-32S-20A	~	~	50	CA7-30	~	~	~	~
KTA9-32S-25A	~	~	15	CA7-30	~	~	~	~
KTA9-32S-29A	~	~	15	CA7-30	~	~	~	~
KTA9-32S-32A	~	~	15	CA7-30	~	~	~	~
KT_9 D-frame, Adjustable Thermal/Fixed Magnetic (14 x In)								
KTA9-40H-0.63A	~	~	100	CA7-9	~	~	~	~
KTA9-40H-1.0A	KTC9-40H-0.63A	KTB9-40H-1.0A	100	CA7-9	~	~	~	~
KTA9-40H-1.6A	KTC9-40H-1.0A	KTCB9-40H-1.6A	100	CA7-9	~	~	~	~
KTA9-40H-2.5A	KTC9-40H-1.6A	KTB9-40H-2.5A	100	CA7-9	~	~	~	~
KTA9-40H-4.0A	KTC9-40H-2.5A	KTB9-40H-4.0A	65	CA7-9	~	~	~	~
KTA9-40H-6.3A	KTC9-40H-4.0A	KTB9-40H-6.3A	65	CA7-9	~	~	~	~
KTA9-40H-10A	KTC9-40H-6.3A	KTB9-40H-10A	65	CA7-9	~	~	~	~
KTA9-40H-16A	KTC9-40H-10A	KTB9-40H-16A	65	CA7-23	~	~	~	~
KTA9-40H-20A	KTC9-40H-16A	KTB9-40H-20A	65	CA7-23	~	~	~	~
KTA9-40H-25A	KTC9-40H-20A	KTB9-40H-25A	65	CA7-23	~	~	~	~
KTA9-40H-29A	KTC9-40H-25A	KTB9-40H-29A	65	CA7-30	~	~	~	~
KTA9-40H-32A	KTC9-40H-29A	KTB9-40H-32A	65	CA7-30/37	~	~	~	~
KTA9-40H-36A	KTC9-40H-32A	~	65	CA7-30/37	~	~	~	~
KTA9-40H-40A	KTC9-40H-36A	KTB9-40H-40A	65	CA7-30/37	~	~	~	~
KT_7 F-frame, Adjustable Thermal/Fixed Magnetic (13 x In)								
KTA7-45H-10A	~	~	100	CA7-9	65	CA7-9	30	CA7-30
KTA7-45H-16A	~	~	100	CA7-12	65	CA7-12	30	CA7-30
KTA7-45H-20A	~	~	100	CA7-23	65	CA7-23	30	CA7-30
KTA7-45H-25A	~	KTB7-45H-25A	100	CA7-30	65	CA7-30	30	CA7-30
KTA7-45H-32A	KTC7-45H-25A	KTB7-45H-32A	100	CA7-30	65	CA7-30	30	CA7-30
KTA7-45H-45A	KTC7-45H-32A	KTB7-45H-45A	100	CA7-37	65	CA7-37	10	CA7-37

❶ Similar for other contactor configurations (CA7 / CAU7 / CAS7 / CAUS7)

UL 60947 Application Ratings, MPCBs' with Series CA8 Contactors

KT9	UL 60947-4-1						UL Type 4-1 Type F		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max. Short-Circuit Current [kA]		Max. Short-Circuit Current [kA]		Minimum Contactor Size	Max. Short-Circuit Current [kA]	
			480V	600V	480V	600V		480Y/277V ❶	600Y/347V ❶
KTA9-32S + CA8 UL Assemblies (CLE) / (14 x In)									
KTA9-32S-0.16A	450	CA8-09	65	47	65	50	CA8-09	65	30
KTA9-32S-0.25A	450	CA8-09	65	47	65	50	CA8-09	65	30
KTA9-32S-0.40A	450	CA8-09	65	47	65	50	CA8-09	65	30
KTA9-32S-0.63A	450	CA8-09	65	47	65	50	CA8-09	65	30
KTA9-32S-1.0A	450	CA8-09	65	47	65	50	CA8-09	65	30
KTA9-32S-1.6A	450	CA8-09	65	47	65	50	CA8-09	65	30
KTA9-32S-2.5A	450	CA8-09	65	47	65	30	CA8-09	65	30
KTA9-32S-4.0A	450	CA8-09	65	30	65	30	CA8-09	65	30
KTA9-32S-6.3A	450	CA8-09	65	30	65	30	CA8-09	65	50
KTA9-32S-10A	450	CA8-09	65	30	65	30	CA8-09	65	50
KTA9-32S-16A	450	CA8-12	30	30	30	30	CA8-12	65	50
KTA9-40H + CA8 UL Assemblies (CLE) / (14 x In)									
KTA9-40H-0.63A	450	CA8-09	65	50	65	50	~	65	30
KTA9-40H-1.0A	450	CA8-09	65	50	65	50	~	65	30
KTA9-40H-1.6A	450	CA8-09	65	50	65	50	~	65	30
KTA9-40H-2.5A	450	CA8-09	65	30	65	30	~	65	30
KTA9-40H-4.0A	450	CA8-09	65	30	65	30	~	65	30
KTA9-40H-6.3A	450	CA8-09	65	30	65	30	~	65	50
KTA9-40H-10A	450	CA8-09	65	30	65	30	~	65	50
KTA9-40H-16A	450	CA8-12	65	30	65	30	~	65	50

UL 60947 Application Ratings, MPCBs' with Series CA7 Contactors

KT9	UL 60947-4-1					
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect	
			Max. Short-Circuit Current [kA]		Max. Short-Circuit Current [kA]	
			480V	600V	480V	600V
KTB9-40H + CA7 UL Assemblies (CLE) / (14 x In)						
KTB9-40H-0.16A	450	CA7-9	65	50	65	50
KTB9-40H-0.25A	450	CA7-9	65	50	65	50
KTB9-40H-0.40A	450	CA7-9	65	50	65	50
KTB9-40H-0.63A	450	CA7-9	65	50	65	50
KTB9-40H-1.0A	450	CA7-9	65	50	65	50
KTB9-40H-1.6A	450	CA7-9	65	50	65	50
KTB9-40H-2.5A	450	CA7-9	65	30	65	30
KTB9-40H-4.0A	450	CA7-9	65	30	65	30
KTB9-40H-6.3A	450	CA7-9	65	30	65	30
KTB9-40H-10A	450	CA7-9	65	30	65	30
KTB9-40H-16A	450	CA7-12	65	30	65	30
KTB9-40H-20A	450	CA7-23	65	30	65	30
KTB9-40H-25A	450	CA7-23	50	30	50	30
KTB9-40H-29A	450	CA7-30	50	30	50	30
KTB9-40H-32A	450	CA7-37	50	30	30	18
KTB9-40H-36A	450	CA7-37	30	30	30	18
KTB9-40H-40A	450	CA7-37	30	30	30	18
KTB7-45H + CA7 UL Assemblies (CLE) / (14 x In)						
KTB7-45H-25A	600	CA7-23	65	30	65	30
KTB7-45H-32A	600	CA7-30	65	30	65	30
KTB7-45H-45A	600	CA7-37	65	18	65	18

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

Type 2 Coordination Ratings, MPCBs' with Series CA7 Contactors

Cat. No.			400V		480V		600V	
Standard Motor Protection	High Inrush Motor Protection	Motor Circuit Protection	Max. Short-Circuit Current [kA]	Max. Short-Circuit Current [kA]	Max. Short-Circuit Current [kA]	Minimum Contactor Size	Max. Short-Circuit Current [kA]	Minimum Contactor Size
KTA9-32S + CA7 UL Assemblies (CLE) / (14 x In)								
KTA9-32S-0.16A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-0.25A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-0.40A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-0.63A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-1.0A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-1.6A	~	~	100	CA7-9	~	~	~	~
KTA9-32S-2.5A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-4.0A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-6.3A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-10A	~	~	65	CA7-23	~	~	~	~
KTA9-32S-16A	~	~	50	CA7-30	~	~	~	~
KTA9-32S-20A	~	~	50	CA7-30	~	~	~	~
KTA9-32S-25A	~	~	15	CA7-30	~	~	~	~
KTA9-32S-29A	~	~	15	CA7-30	~	~	~	~
KTA9-32S-32A	~	~	15	CA7-30	~	~	~	~
KT_9-40H + CA7 UL Assemblies (CLE) / (14 x In)								
KTA9-40H-0.63A	~	~	100	CA7-9	~	~	~	~
KTA9-40H-1.0A	KTC9-40H-0.63A	KTB9-40H-1.0A	100	CA7-9	~	~	~	~
KTA9-40H-1.6A	KTC9-40H-1.0A	KTB9-40H-1.6A	100	CA7-9	~	~	~	~
KTA9-40H-2.5A	KTC9-40H-1.6A	KTB9-40H-2.5A	100	CA7-9	~	~	~	~
KTA9-40H-4.0A	KTC9-40H-2.5A	KTB9-40H-4.0A	65	CA7-9	~	~	~	~
KTA9-40H-6.3A	KTC9-40H-4.0A	KTB9-40H-6.3A	65	CA7-9	~	~	~	~
KTA9-40H-10A	KTC9-40H-6.3A	KTB9-40H-10A	65	CA7-9	~	~	~	~
KTA9-40H-16A	KTC9-40H-10A	KTB9-40H-16A	65	CA7-23	~	~	~	~
KTA9-40H-20A	KTC9-40H-16A	KTB9-40H-20A	65	CA7-23	~	~	~	~
KTA9-40H-25A	KTC9-40H-20A	KTB9-40H-25A	50	CA7-23	~	~	~	~
KTA9-40H-29A	KTC9-40H-25A	KTB9-40H-29A	65	CA7-30	~	~	~	~
KTA9-40H-32A	KTC9-40H-29A	KTB9-40H-32A	65	CA7-30/37	~	~	~	~
KTA9-40H-36A	KTC9-40H-32A	~	65	CA7-30/37	~	~	~	~
KTA9-40H-40A	KTC9-40H-36A	KTB9-40H-40A	65	CA7-30/37	~	~	~	~
KT_7-45H + CA7 UL Assemblies (CLE) / (13 x In)								
KTA7-45H-10A	~	~	100	CA7-9	65	CA7-9	30	CA7-30
KTA7-45H-16A	~	~	100	CA7-12	65	CA7-12	30	CA7-30
KTA7-45H-20A	~	~	100	CA7-23	65	CA7-23	30	CA7-30
KTA7-45H-25A	~	KTB7-45H-25A	100	CA7-30	65	CA7-30	30	CA7-30
KTA7-45H-32A	KTC7-45H-25A	KTB7-45H-32A	100	CA7-30	65	CA7-30	30	CA7-30
KTA7-45H-45A	KTC7-45H-32A	KTB7-45H-45A	100	CA7-37	65	CA7-37	30	CA7-37

2-Component ECombo Starters

CLE Non-Reversing Typical Diagram

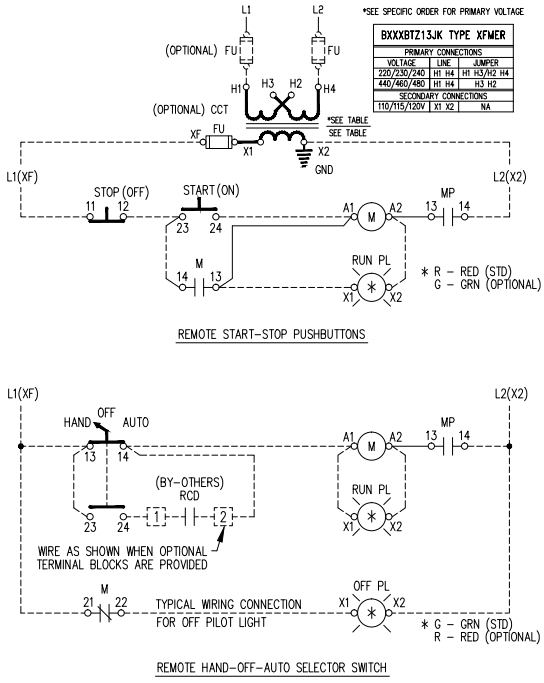

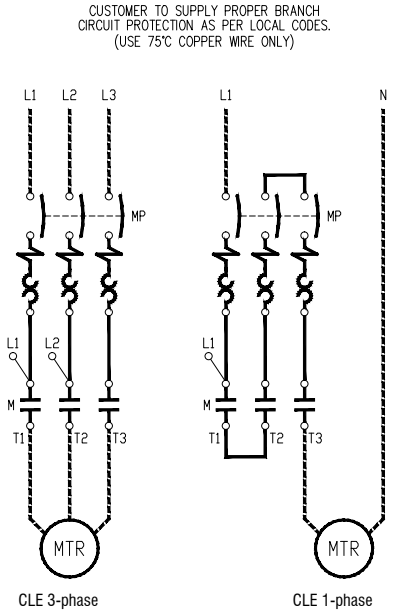

NOTES:
1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER.
2) MP: KT9 "TYPE E" MOTOR CONTROLLER.
3) X2 TERMINAL GROUNDED AS STANDARD, REMOVE GROUND IF NOT REQUIRED.

3-Component ECombo Starters

CLE + O/L Non-Reversing Typical Diagram

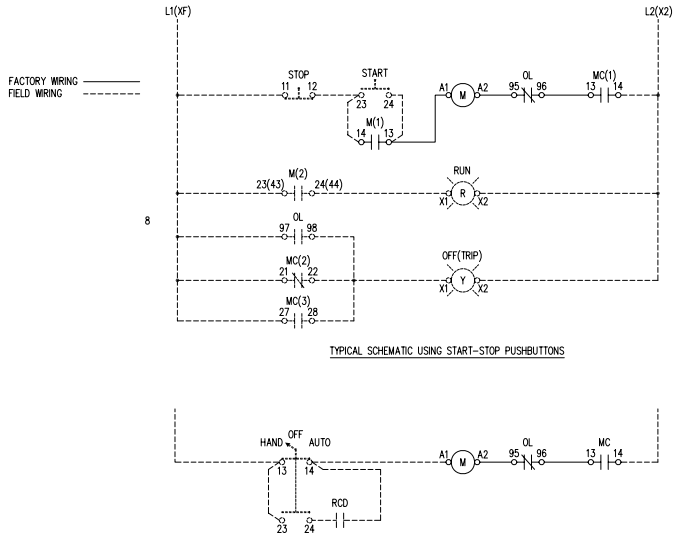

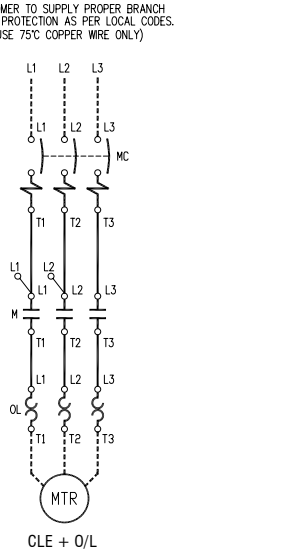

NOTES:
1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER.
2) MC: KTB7 MOTOR CONTROLLER.

Non-Reversing Three Component Combination Starters CLE-CLUE-709…723

CLE-CLUE-709…723

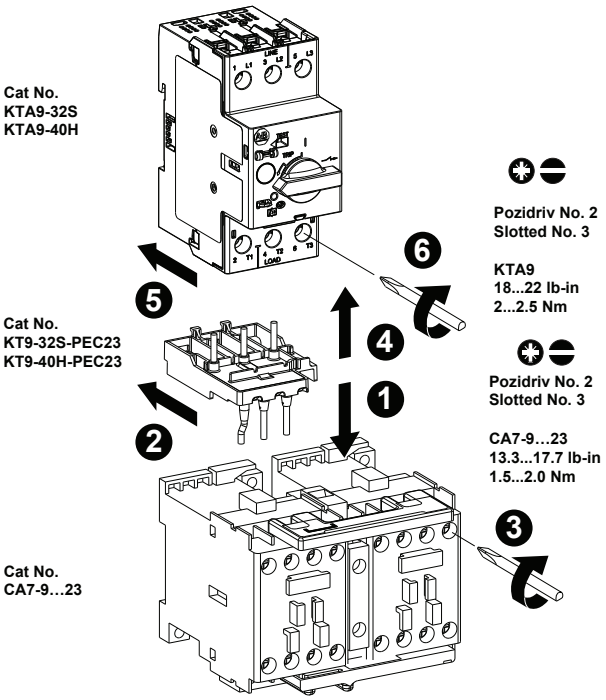

KTA9-32S + KT9-32S-PEC23

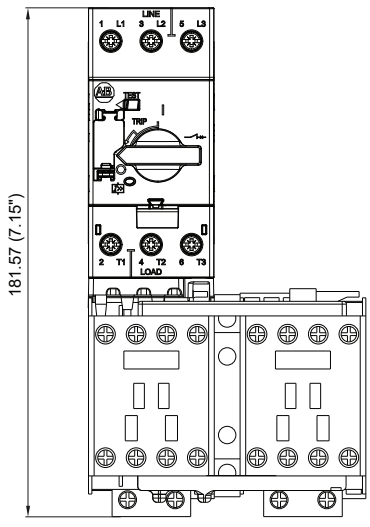

KTA9-32S + KT9-32S-PEC23 + CAU7

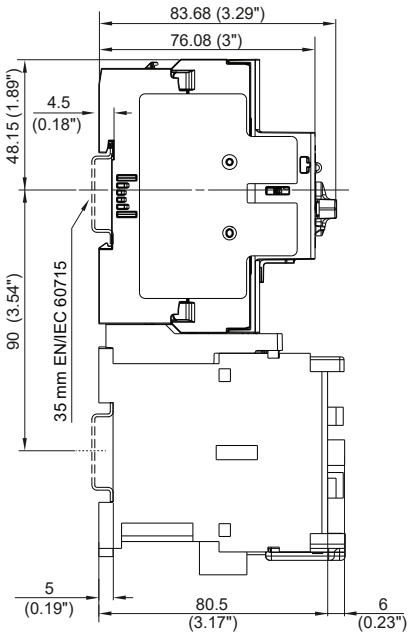

KTA9-40H + KT9-40H-PEC23 + CAU7-9...23

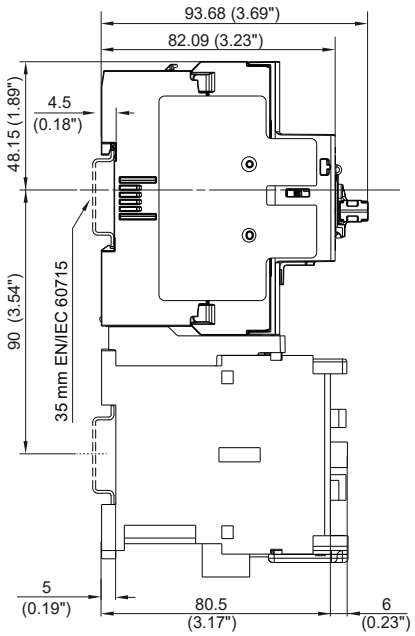

Non-Reversing Three Component Combination Starters CLE-CLUE-730…72

CLE-CLUE-730…737

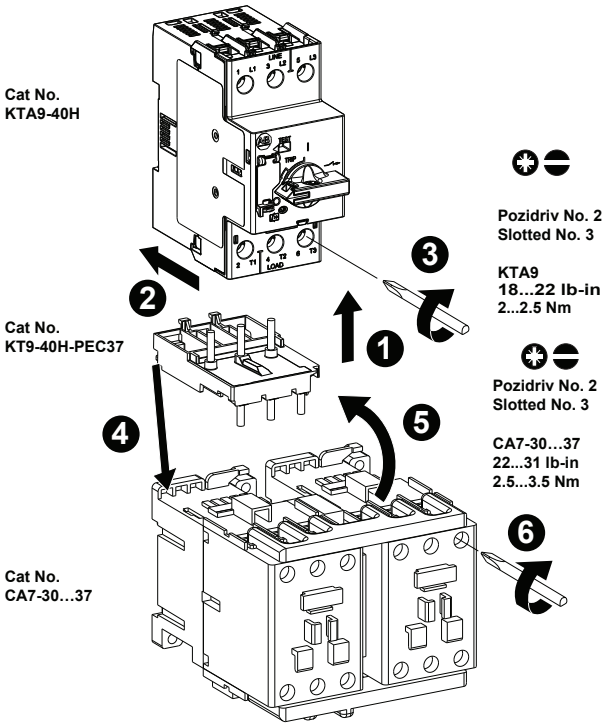

KTA9-40H + KT9-40H-PEC37 + CAU7-30...37

KTA9-40H + KT9-40H-PEC37 + CAU7-30…37

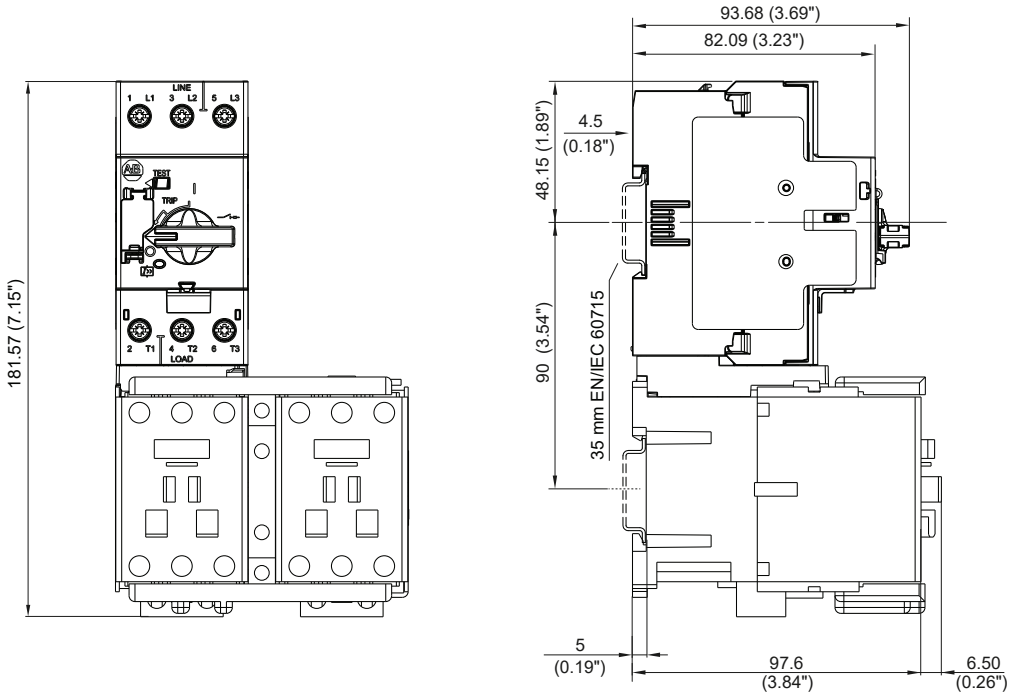

Non-Reversing Three Component Combination Starters CLE-CLUE-809...812

CLE-CLUE-809…812

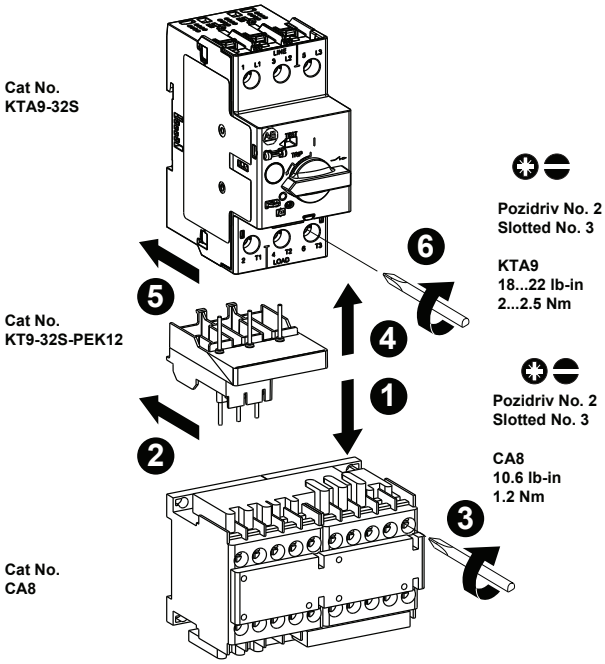

KTA9-32S + KT9-32S-PEK12 + CAU8

KTA9-32S + KT9-32S-PEK12 + CAU8...

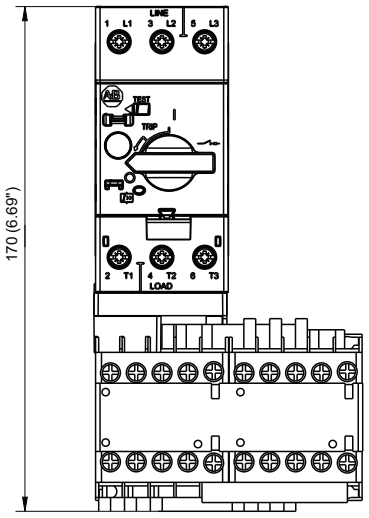

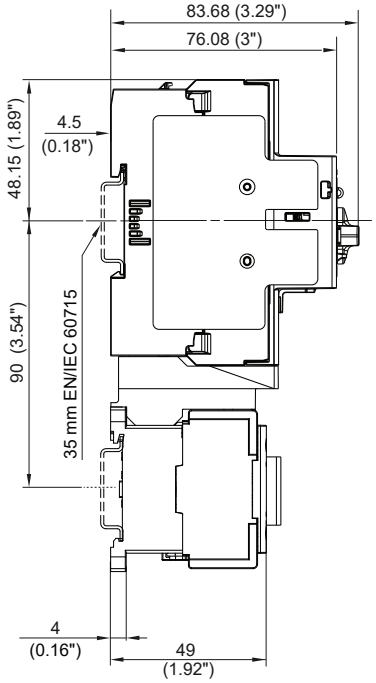

F

ECombo Circuit Controllers

Notes

Enclosed Motor Controllers and Molded Case Circuit Breakers

KTA9 Type-E Self Protected Manual Motor Controllers
Page F1.57

Explosion-Proof Motor Controllers

KTA9_EX
Page F1.61

KTA9_EZ
Page F1.62

The following pages contain a selection of single enclosed KTA9 & KTC9 motor controllers which can be applied as an individual Manual Self-Protected Combination Motor Controller or as an individual Manual Motor Starter dependent on the ratings of the individual unit.

- A Self-protected Combination Motor Controller (UL508 Construction Type E) performs all the functions of a Manual Combo starter including a UL approved means "Disconnect" with lockable and defeatable handle mechanism, short-circuit protection and overload protection for motor applications.
- A UL508 Manual Motor Controller is a manual motor starter including a motor disconnect combined with an overload relay.

Both can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements. The section that follows includes non-metallic enclosures, metallic enclosures and explosion-proof enclosures.

Enclosed Molded Case Circuit Breakers

The following pages contain a selection of individual enclosed KTU9 molded case circuit breakers for the protection of non-motor loads. KTU9 is a 480Y/277Volt or 600Y/347 volt UL489 approved circuit breaker and the selection of enclosures or combined with matching environmentally approved thru-the-door handle disconnect mechanism which also complies with UL489 standards. KTU9 offers at least 65 KAIC withstand ratings which exceeds those offered by many 600 Volt Class Molded Case Circuit Breakers which are larger and more expensive. Enclosed KTU9 can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements.

KTU9 Molded Case Circuit Breakers
Page F1.63

Enclosed Type E/F Combination Starters

KTA9 or KTC9 can be applied in combination with a CA7 contactor for remote control and an enclosure with matching environmentally approved thru-the-door handle disconnect mechanism to meet all requirements for a Construction Type E or F Combination Starter. The following pages contain a selection of individual Combo starters which are smaller and less expensive than Classic Construction Type A (Fusible), or Type C (Thermal-magnetic Molded Case Circuit Breaker) as offered in Section C of this catalog. The following types are offered:

CX7 Ecombo KWIKStarters
Page F1.66

- Non-metallic enclosed Combo KwikStarter CX7 and CXU7 with AC or DC coils available as factory assembled or in kit form for field assembly
- Metallic enclosed Combo CX7 and CXU7with AC or DC coils
- Explosion-proof enclosed CX7 and CXU7with AC or DC coils

A variety of modifications are available.

CX7 Combination Controllers
Page F1.73

Enclosed KTA9 - Type 4/4X/12K - IP66

Amp / Horsepower Rating						Non-metallic Enclosure	
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Dimension Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**KTA9-32S-0.16A-CG**	AY
~	~	~	~	0.16…0.25	3.5	**KTA9-32S-0.25A-CG**	AY
~	~	~	~	0.25…0.40	5.6	**KTA9-32S-0.40A-CG**	AY
~	~	~	~	0.40…0.63	8.8	**KTA9-32S-0.63A-CG**	AY
~	~	1/2	1/2	0.63…1.0	14	**KTA9-32S-1.0A-CG**	AY
~	~	3/4	~	1.0…1.6	22	**KTA9-32S-1.6A-CG**	AY
1/2	1/2	1	1-1/2	1.6…2.5	35	**KTA9-32S-2.5A-CG**	AY
3/4	3/4	2	3	2.5…4.0	52	**KTA9-32S-4.0A-CG**	AY
1	1-1/2	3	5 ❻	4.0…6.3	88	**KTA9-32S-6.3A-CG**	AY
2	2	5	7-1/2 ❻	6.3…10	140	**KTA9-32S-10A-CG**	AY
3	5	10	10 ❻	10…16 ❼	224	**KTA9-32S-16A-CG**	AY

Includes:

- Non-metallic (Type 4/4X/12K - IP66) enclosure with integrated operator – watertight, dusttight
- KTA9-32S (Standard Interrupting Capacity) "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- Gray and black handle ❹❺

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT9 Auxiliaries & Trip Contacts, Front Mount 250V max.	
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-R**
1 NO SC+OL + 1 NO Auxiliary	**-S**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT9 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Accessories	
Undervoltage Release Module	**-UA-✱**
Shunt Release Module	**-AA-✱**

Enclosure Only - Type 4/4X/12K - IP66

	Description	For use With	Catalog Number
	Gray/Black handle	KTA9-32S up to 13A	**KT9-ENN**
	Red/Yellow handle	KTA9-32S up to 13A	**KT9-ENRY**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ Magnetic trip is fixed at 14x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "CG" suffix to "CJ". Ex: Change KTA9-32S-0.16A-CG to KTA9-32S-0.16A-CJ.

❺ Handles are built-in to the enclosure and are not available as components.

❻ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

❼ This device is 30 kAIC approved up to 13 amps.

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	24V	24V...28V
120V	**110V**	**120V**
230V	220...230V	~
260V	~	240...260V
277V	~	277V
400V	380...400V	~
480V	415V	480V

Enclosed KTA9 - Type 4 / 4X / 12

Non-metallic, Type 4 / 4X / 12 Enclosure



Amp / Horsepower Rating							
Max. Horsepower ❶❷ Three Phase				O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❸	Dim Code
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**KTA9-32S-0.16A-VG**	Q5
~	~	~	~	0.16…0.25	3.5	**KTA9-32S-0.25A-VG**	Q5
~	~	~	~	0.25…0.40	5.6	**KTA9-32S-0.40A-VG**	Q5
~	~	~	~	0.40…0.63	8.8	**KTA9-32S-0.63A-VG**	Q5
~	~	1/2	1/2	0.63…1.0	14	**KTA9-32S-1.0A-VG**	Q5
~	~	3/4	~	1.0…1.6	22	**KTA9-32S-1.6A-VG**	Q5
1/2	1/2	1	1-1/2	1.6…2.5	35	**KTA9-32S-2.5A-VG**	Q5
3/4	3/4	2	3	2.5…4.0	52	**KTA9-32S-4.0A-VG**	Q5
1	1-1/2	3	5 ❹	4.0…6.3	88	**KTA9-32S-6.3A-VG** ❹	Q5
2	2	5	7-1/2 ❹	6.3…10	140	**KTA9-32S-10A-VG** ❹	Q5
3	5	10	10 ❹	10…16	224	**KTA9-32S-16A-VG** ❹	Q5
5 ❹	5 ❹	10 ❹	15 ❹	14.5…20	280	**KTA9-32S-20A-VG** ❹	Q5
5 ❹	7-1/2 ❹	15 ❹	20 ❹	18…25	330	**KTA9-32S-25A-VG** ❹	Q5
7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	406	**KTA9-32S-29A-VG** ❹	Q5
7-1/2 ❹	10 ❹	20 ❹	30 ❹	27…32	448	**KTA9-32S-32A-VG** ❹	Q5
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**KTA9-40H-0.63A-VG**	Q6
~	~	1/2	1/2	0.63...1.0	14	**KTA9-40H-1.0A-VG**	Q6
~	~	3/4	~	1.0...1.6	22	**KTA9-40H-1.6A-VG**	Q6
1/2	1/2	1	1-1/2	1.6…2.5	33	**KTA9-40H-2.5A-VG**	Q6
3/4	3/4	2	3	2.5…4.0	52	**KTA9-40H-4.0A-VG**	Q6
1	1-1/2	3	5	4.0…6.3	82	**KTA9-40H-6.3A-VG**	Q6
2	2	5	7-1/2	6.3…10	130	**KTA9-40H-10A-VG**	Q6
3	5	10	10	10…16	208	**KTA9-40H-16A-VG**	Q6
5	5	10	15 ❹	14.5…20	260	**KTA9-40H-20A-VG** ❹	Q6
5	7-1/2	15	20 ❹	18…25	325	**KTA9-40H-25A-VG** ❹	Q6
7-1/2	10	20	25 ❹	24…29	406	**KTA9-40H-29A-VG** ❹	Q6
7-1/2	10	20	30 ❹	27…32	448	**KTA9-40H-32A-VG** ❹	Q6
10	10	25	30 ❹	30...36	432	**KTA9-40H-36A-VG** ❹	Q6
10	10	30	30 ❹	34...40	480	**KTA9-40H-40A-VG** ❹	Q6
KTA7-45H High Interrupting Capacity							
2	3	5	7-1/2	6.3…10	130	**KTA7-45H-10A-VG**	Q7
3	5	10	10	10…16	208	**KTA7-45H-16A-VG**	Q7
5	5	10	15	14.5…20	260	**KTA7-45H-20A-VG**	Q7
7-1/2	7-1/2	15	20	18…25	325	**KTA7-45H-25A-VG**	Q7
7-1/2	10	20	30	23…32	416	**KTA7-45H-32A-VG**	Q7
10	15	30	40 ❹	32…45	585	**KTA7-45H-45A-VG**	Q7

Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTA9 "Type E" Self-protected Combination Manual Controller (Standard Interrupting Capacity) ❺
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT9 Auxiliaries & Trip Contacts, Front Mount 250V max.	
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC	**-R**
1 NO SC+OL + 1 NO	**-S**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT9 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Accessories	
Undervoltage Release Module	**-UA-✱**
Shunt Release Module	**-AA-✱**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	60 Hz
24V	24V	24V...28V
120V	**110V**	**120V**
230V	220...230V	~
260V	~	240...260V
277V	~	277V
400V	380...400V	~
480V	415V	480V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❸ A red and yellow handle may be selected instead of the standard gray and black handle. Change "VG" suffix to "VJ". Ex: Change KTA9-32S-0.16-**VG** to KTA9-32S-0.16-**VJ**.

❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA9 - Type 12

Amp / Horsepower Rating						Painted Steel, Type 12 Enclosure	
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Dim Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**KTA9-32S-0.16A-DG**	L
~	~	~	~	0.16…0.25	3.5	**KTA9-32S-0.25A-DG**	L
~	~	~	~	0.25…0.40	5.6	**KTA9-32S-0.40A-DG**	L
~	~	~	~	0.40…0.63	8.8	**KTA9-32S-0.63A-DG**	L
~	~	1/2	1/2	0.63…1.0	14	**KTA9-32S-1.0A-DG**	L
~	~	3/4	~	1.0…1.6	22	**KTA9-32S-1.6A-DG**	L
1/2	1/2	1	1-1/2	1.6…2.5	35	**KTA9-32S-2.5A-DG**	L
3/4	3/4	2	3	2.5…4.0	52	**KTA9-32S-4.0A-DG**	L
1	1-1/2	3	5 ❹	4.0…6.3	88	**KTA9-32S-6.3A-DG** ❹	L
2	2	5	7-1/2 ❹	6.3…10	140	**KTA9-32S-10A-DG** ❹	L
3	5	10	10 ❹	10…16	224	**KTA9-32S-16A-DG** ❹	L
5 ❹	5 ❹	10 ❹	15 ❹	14.5…20	280	**KTA9-32S-20A-DG** ❹	L
5 ❹	7-1/2 ❹	15 ❹	20 ❹	18…25	330	**KTA9-32S-25A-DG** ❹	L
7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	406	**KTA9-32S-29A-DG** ❹	L
7-1/2 ❹	10 ❹	20 ❹	30 ❹	27…32	448	**KTA9-32S-32A-DG** ❹	L
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**KTA9-40H-0.63A-DG**	L
~	~	1/2	1/2	0.63...1.0	14	**KTA9-40H-1.0A-DG**	L
~	~	3/4	~	1.0...1.6	22	**KTA9-40H-1.6A-DG**	L
1/2	1/2	1	1-1/2	1.6…2.5	33	**KTA9-40H-2.5A-DG**	L
3/4	3/4	2	3	2.5…4.0	52	**KTA9-40H-4.0A-DG**	L
1	1-1/2	3	5	4.0…6.3	82	**KTA9-40H-6.3A-DG**	L
2	2	5	7-1/2	6.3…10	130	**KTA9-40H-10A-DG**	L
3	5	10	10	10…16	208	**KTA9-40H-16A-DG**	L
5	5	10	15 ❹	14.5…20	260	**KTA9-40H-20A-DG** ❹	L
5	7-1/2	15	20 ❹	18…25	325	**KTA9-40H-25A-DG** ❹	L
7-1/2	10	20	25 ❹	24…29	406	**KTA9-40H-29A-DG** ❹	L
7-1/2	10	20	30 ❹	27…32	448	**KTA9-40H-32A-DG** ❹	L
10	10	25	30 ❹	30...36	432	**KTA9-40H-36A-DG** ❹	L
10	10	30	30 ❹	34...40	480	**KTA9-40H-40A-DG** ❹	L

Includes:

- Type 12 enclosure – dusttight
- KTA9 "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT9 Auxiliaries & Trip Contacts, Front Mount 250V max.	
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC	**-R**
1 NO SC+OL + 1 NO	**-S**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT9 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Accessories	
Undervoltage Release Module	**-UA-✱**
Shunt Release Module	**-AA-✱**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24V	24V	24V...28V
120V	**110V**	**120V**
230V	220...230V	~
260V	~	240...260V
277V	~	277V
400V	380...400V	~
480V	415V	480V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❸ A red and yellow handle may be selected instead of the standard gray and black handle. Change "DG" suffix to "DJ". Ex: Change KTA9-32S-0.16-DG to KTA9-32S-0.16-**DJ**.

❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA9 - Type 4 / 12

Amp / Horsepower Rating						Painted Steel, Type 4 / 12 Enclosure	
Max. Horsepower ❶❷				O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❸	Dim Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**KTA9-32S-0.16A-WG**	W6
~	~	~	~	0.16…0.25	3.5	**KTA9-32S-0.25A-WG**	W6
~	~	~	~	0.25…0.40	5.6	**KTA9-32S-0.40A-WG**	W6
~	~	~	~	0.40…0.63	8.8	**KTA9-32S-0.63A-WG**	W6
~	~	1/2	1/2	0.63…1.0	14	**KTA9-32S-1.0A-WG**	W6
~	~	3/4	~	1.0…1.6	22	**KTA9-32S-1.6A-WG**	W6
1/2	1/2	1	1-1/2	1.6…2.5	35	**KTA9-32S-2.5A-WG**	W6
3/4	3/4	2	3	2.5…4.0	52	**KTA9-32S-4.0A-WG**	W6
1	1-1/2	3	5 ❹	4.0…6.3	88	**KTA9-32S-6.3A-WG** ❹	W6
2	2	5	7-1/2 ❹	6.3…10	140	**KTA9-32S-10A-WG** ❹	W6
3	5	10	10 ❹	10…16	224	**KTA9-32S-16A-WG** ❹	W6
5 ❹	5 ❹	10 ❹	15 ❹	14.5…20	280	**KTA9-32S-20A-WG** ❹	W6
5 ❹	7-1/2 ❹	15 ❹	20 ❹	18…25	330	**KTA9-32S-25A-WG** ❹	W6
7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	406	**KTA9-32S-29A-WG** ❹	W6
7-1/2 ❹	10 ❹	20 ❹	30 ❹	27…32	448	**KTA9-32S-32A-WG** ❹	W6
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**KTA9-40H-0.63A-VG**	W6
~	~	1/2	1/2	0.63...1.0	14	**KTA9-40H-1.0A-VG**	W6
~	~	3/4	~	1.0...1.6	22	**KTA9-40H-1.6A-VG**	W6
1/2	1/2	1	1-1/2	1.6…2.5	33	**KTA9-40H-2.5A-WG**	W6
3/4	3/4	2	3	2.5…4.0	52	**KTA9-40H-4.0A-WG**	W6
1	1-1/2	3	5	4.0…6.3	82	**KTA9-40H-6.3A-WG**	W6
2	2	5	7-1/2	6.3…10	130	**KTA9-40H-10A-WG**	W6
3	5	10	10	10…16	208	**KTA9-40H-16A-WG**	W6
5	5	10	15 ❹	14.5…20	260	**KTA9-40H-20A-WG** ❹	W6
5	7-1/2	15	20 ❹	18…25	325	**KTA9-40H-25A-WG** ❹	W6
7-1/2	10	20	25 ❹	24…29	406	**KTA9-40H-29A-WG**❹	W6
7-1/2	10	20	30 ❹	27…32	448	**KTA9-40H-32A-WG**❹	W6
10	10	25	30 ❹	30...36	432	**KTA9-40H-36A-WG** ❹	W6
10	10	30	30 ❹	34...40	480	**KTA9-40H-40A-WG** ❹	W6
KTA7-45H High Interrupting Capacity							
2	3	5	7-1/2	6.3…10	130	**KTA7-45H-10A-WG**	R/F
3	5	10	10	10…16	208	**KTA7-45H-16A-WG**	R/F
5	5	10	15	14.5…20	260	**KTA7-45H-20A-WG**	R/F
7-1/2	7-1/2	15	20	18…25	325	**KTA7-45H-25A-WG**	R/F
7-1/2	10	20	30	23…32	416	**KTA7-45H-32A-WG**	R/F
10	15	30	40 ❹	32…45	585	**KTA7-45H-45A-WG** ❹	R/F

Includes:

- Type 4 / 12 enclosure – watertight, dusttight
- KTA9 "Type E" Self-protected Combination Manual Controller ❹
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❸

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT9 Auxiliaries & Trip Contacts, Front Mount 250V max.	
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC	**-R**
1 NO SC+OL + 1 NO	**-S**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT9 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Accessories	
Undervoltage Release Module	**-UA-✱**
Shunt Release Module	**-AA-✱**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	24V	24V...28V
120V	**110V**	**120V**
230V	220...230V	~
260V	~	240...260V
277V	~	277V
400V	380...400V	~
480V	415V	480V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❸ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change KTA9-32S-0.16-WG to KTA9-32S-0.16-**WJ**.

❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

KTA9 Explosion Proof Motor Controllers - NEMA Type 7/9

Amp / Horsepower Rating							
Max. Horsepower ❶❷ Three Phase				O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number	Dim Code
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**KTA9-32S-0.16A-EX**	EX
~	~	~	~	0.16…0.25	3.5	**KTA9-32S-0.25A-EX**	EX
~	~	~	~	0.25…0.40	5.6	**KTA9-32S-0.40A-EX**	EX
~	~	~	~	0.40…0.63	8.8	**KTA9-32S-0.63A-EX**	EX
~	~	1/2	1/2	0.63…1.0	14	**KTA9-32S-1.0A-EX**	EX
~	~	3/4	~	1.0…1.6	22	**KTA9-32S-1.6A-EX**	EX
1/2	1/2	1	1-1/2	1.6…2.5	35	**KTA9-32S-2.5A-EX**	EX
3/4	3/4	2	3	2.5…4.0	52	**KTA9-32S-4.0A-EX**	EX
1	1-1/2	3	5 ❸	4.0…6.3	88	**KTA9-32S-6.3A-EX ❸**	EX
2	2	5	7-1/2 ❸	6.3…10	140	**KTA9-32S-10A-EX ❸**	EX
3	5	10	10 ❸	10…16	224	**KTA9-32S-16A-EX ❸**	EX
5 ❸	5 ❸	10 ❸	15 ❸	14.5…20	280	**KTA9-32S-20A-EX ❸**	EX
5 ❸	7-1/2 ❸	15 ❸	20 ❸	18…25	330	**KTA9-32S-25A-EX ❸**	EX
7-1/2 ❸	10 ❸	20 ❸	25 ❸	24…29	406	**KTA9-32S-29A-EX ❸**	EX
7-1/2 ❸	10 ❸	20 ❸	30 ❸	27…32	448	**KTA9-32S-32A-EX ❸**	EX

Includes:

- Class I, Div 1, 2, Group C, D
  Class II, Div 1, 2, Group E, F & G enclosure
  Class III
  NEMA Type 7/9
- KTA9 "Type E" Self-protected Combination Manual Motor Controller ❸
- Terminal Adaptor for Type E Applications
  (Cat.# KT9-40-TE)

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT9 Auxiliaries & Trip Contacts, Front Mount 250V max.	
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC	**-R**
1 NO SC+OL + 1 NO	**-S**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT9 Trip Contacts Side Mounts 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Enclosure Modifications	
Breather/Drain	**-BD**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-0.40A.

❷ KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❸ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

❹ -UA✱ and -AA✱ options not possible in the -EX Enclosure.

KTA9 Explosion Proof Motor Controllers – NEMA Type 4/7/9 with Gasket



EY Enclosure shown

Amp / Horsepower Rating							
Max. Horsepower ❶❷				O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❸	Dim Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**KTA9-32S-0.16A-EY**	EY
~	~	~	~	0.16…0.25	3.5	**KTA9-32S-0.25A-EY**	EY
~	~	~	~	0.25…0.40	5.6	**KTA9-32S-0.40A-EY**	EY
~	~	~	~	0.40…0.63	8.8	**KTA9-32S-0.63A-EY**	EY
~	~	1/2	1/2	0.63…1.0	14	**KTA9-32S-1.0A-EY**	EY
~	~	3/4	~	1.0…1.6	22	**KTA9-32S-1.6A-EY**	EY
1/2	1/2	1	1-1/2	1.6…2.5	35	**KTA9-32S-2.5A-EY**	EY
3/4	3/4	2	3	2.5…4.0	52	**KTA9-32S-4.0A-EY**	EY
1	1-1/2	3	5 ❸	4.0…6.3	88	**KTA9-32S-6.3A-EY**	EY
2	2	5	7-1/2 ❸	6.3…10	140	**KTA9-32S-10A-EY**	EY
3	5	10	10 ❸	10…16	224	**KTA9-32S-16A-EY**	EY
5 ❸	5 ❸	10 ❸	15 ❸	14.5…20	280	**KTA9-32S-20A-EY**	EY
5 ❸	7-1/2 ❸	15 ❸	20 ❸	18…25	330	**KTA9-32S-25A-EY**	EY
7-1/2 ❸	10 ❸	20 ❸	25 ❸	24…29	406	**KTA9-32S-29A-EY**	EY
7-1/2 ❸	10 ❸	20 ❸	30 ❸	27…32	448	**KTA9-32S-32A-EY**	EY
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**KTA9-40H-0.63A-EY**	EY
~	~	1/2	1/2	0.63...1.0	14	**KTA9-40H-1.0A-EY**	EY
~	~	3/4	~	1.0...1.6	22	**KTA9-40H-1.6A-EY**	EY
1/2	1/2	1	1-1/2	1.6…2.5	33	**KTA9-40H-2.5A-EY**	EY
3/4	3/4	2	3	2.5…4.0	52	**KTA9-40H-4.0A-EY**	EY
1	1-1/2	3	5	4.0…6.3	82	**KTA9-40H-6.3A-EY**	EY
2	2	5	7-1/2	6.3…10	130	**KTA9-40H-10A-EY**	EY
3	5	10	10	10…16	208	**KTA9-40H-16A-EY**	EY
5	5	10	15 ❸	14.5…20	260	**KTA9-40H-20A-EY**	EY
5	7-1/2	15	20 ❸	18…25	325	**KTA9-40H-25A-EY**	EY
7-1/2	10	20	25 ❸	24…29	406	**KTA9-40H-29A-EY**	EY
7-1/2	10	20	30 ❸	27…32	448	**KTA9-40H-32A-EY**	EY
10	10	25	30 ❸	30...36	432	**KTA9-40H-36A-EY**	EY
10	10	30	30 ❸	34...40	480	**KTA9-40H-40A-EY**	EY
KTA7-45H High Interrupting Capacity							
2	3	5	7-1/2	6.3…10	130	**KTA7-45H-10A-EZ**	EZ
3	5	10	10	10…16	208	**KTA7-45H-16A-EZ**	EZ
5	5	10	15	14.5…20	260	**KTA7-45H-20A-EZ**	EZ
7-1/2	7-1/2	15	20	18…25	325	**KTA7-45H-25A-EZ**	EZ
7-1/2	10	20	30	23…32	416	**KTA7-45H-32A-EZ**	EZ
10	15	30	40 ❸	32…45	585	**KTA7-45H-45A-EZ**	EZ

Includes:

- Class I, Div 1, 2, Group C, D
  Class II, Div 1, 2, Group E, F & G enclosure
  Class III
- NEMA Type 4/7/9
- KTA9 "Type E" Self-protected Combination Manual Motor Controller ❸
- Terminal Adaptor for Type E Applications
  (Cat.# KT9-40-TE or KT7-45-TE)

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT9 Auxiliaries & Trip Contacts, Front Mount 250V max.	
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC	**-R**
1 NO SC+OL + 1 NO	**-S**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT9 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Accessories	
Undervoltage Release Module	**-UA-✱**
Shunt Release Module	**-AA-✱**
Enclosure Modifications	
Breather/Drain	**-BD**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	24V	24V...28V
120V	**110V**	**120V**
230V	220...230V	~
260V	~	240...260V
277V	~	277V
400V	380...400V	~
480V	415V	480V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ KTA9 may be applied to single phase loads if 3 poles of device are wired in series. See footnote ❶ for device selection criteria.

❸ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTU9 Circuit Breaker - Type 4 / 4X / 12

Amp / Interrupt Rating					Non-metallic, Type 4 / 4X / 12 Enclosure	
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Dimension Code
KTU9-D — High Interrupting Capacity – 2-Pole						
0.5	15…20xI_n	100	100	50	**KTU9-40H-2D-0.5-VG**	
1.0	15…20xI_n	100	100	50	**KTU9-40H-2D-1-VG**	
2.0	15…20xI_n	100	100	50	**KTU9-40H-2D-2-VG**	
3.0	15…20xI_n	100	100	50	**KTU9-40H-2D-3-VG**	
4.0	15…20xI_n	100	100	50	**KTU9-40H-2D-4-VG**	
5.0	15…20xI_n	100	100	50	**KTU9-40H-2D-5-VG**	
6.0	15…20xI_n	100	100	50	**KTU9-40H-2D-6-VG**	
8.0	15…20xI_n	100	100	50	**KTU9-40H-2D-8-VG**	Q6 ❶
10.0	15…20xI_n	100	100	50	**KTU9-40H-2D-10-VG**	
12.0	15…20xI_n	65	65	25	**KTU9-40H-2D-12-VG**	
15.0	15…20xI_n	65	65	25	**KTU9-40H-2D-15-VG**	
20.0	15…20xI_n	65	65	~	**KTU9-40H-2D-20-VG**	
25.0	15…20xI_n	65	65	~	**KTU9-40H-2D-25-VG**	
30.0	15…20xI_n	65	65	~	**KTU9-40H-2D-30-VG**	
35.0	14 x I_n	65	65	~	**KTU9-40H-2D-35-VG**	
40.0	12 x I_n	65	65	~	**KTU9-40H-2D-40-VG**	
KTU9-D — High Interrupting Capacity – 3-Pole						
0.5	15…20xI_n	100	100	50	**KTU9-40H-3D-0.5-VG**	
1.0	15…20xI_n	100	100	50	**KTU9-40H-3D-1-VG**	
2.0	15…20xI_n	100	100	50	**KTU9-40H-3D-2-VG**	
3.0	15…20xI_n	100	100	50	**KTU9-40H-3D-3-VG**	
4.0	15…20xI_n	100	100	50	**KTU9-40H-3D-4-VG**	
5.0	15…20xI_n	100	100	50	**KTU9-40H-3D-5-VG**	
6.0	15…20xI_n	100	100	50	**KTU9-40H-3D-6-VG**	
8.0	15…20xI_n	100	100	50	**KTU9-40H-3D-8-VG**	Q6 ❶
10.0	15…20xI_n	100	100	50	**KTU9-40H-3D-10-VG**	
12.0	15…20xI_n	65	65	25	**KTU9-40H-3D-12-VG**	
15.0	15…20xI_n	65	65	25	**KTU9-40H-3D-15-VG**	
20.0	15…20xI_n	65	65	~	**KTU9-40H-3D-20-VG**	
25.0	15…20xI_n	65	65	~	**KTU9-40H-3D-25-VG**	
30.0	15…20xI_n	65	65	~	**KTU9-40H-3D-30-VG**	
35.0	14 x I_n	65	65	~	**KTU9-40H-3D-35-VG**	
40.0	12 x I_n	65	65	~	**KTU9-40H-3D-40-VG**	

Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTU9 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN Series E) ❷

Modifications (Factory Assembled) ❸

KT9 Auxiliaries & Trip Contacts - Front Mount 250V max.	Add Suffix to Cat. Number
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-R**
1 NO SC+OL + 1 NO Auxiliary	**-S**

❶ KTU9 is 80% rated in this enclosure.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "VG" suffix to "VJ". Ex: Change KTU9-40H-2D-0.16-VG to KTU9-40H-2D-0.16-VJ.
❸ Load Terminal Cover KT9-PEFC is included with any factory modifications.

Enclosed KTU9 Circuit Breaker - Type 12

Amp / Interrupt Rating					Painted Steel, Type 12 Enclosure	
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Dim Code
KTU9-40H-2D — High Interrupting Capacity – 2-Pole						
0.5	15…20xI_n	100	100	50	**KTU9-40H-2D-0.5-DG**	
1.0	15…20xI_n	100	100	50	**KTU9-40H-2D-1-DG**	
2.0	15…20xI_n	100	100	50	**KTU9-40H-2D-2-DG**	
3.0	15…20xI_n	100	100	50	**KTU9-40H-2D-3-DG**	
4.0	15…20xI_n	100	100	50	**KTU9-40H-2D-4-DG**	
5.0	15…20xI_n	100	100	50	**KTU9-40H-2D-5-DG**	
6.0	15…20xI_n	100	100	50	**KTU9-40H-2D-6-DG**	
8.0	15…20xI_n	100	100	50	**KTU9-40H-2D-8-DG**	
10.0	15…20xI_n	100	100	50	**KTU9-40H-2D-10-DG**	**L** ❶
12.0	15…20xI_n	65	65	25	**KTU9-40H-2D-12-DG**	
15.0	15…20xI_n	65	65	25	**KTU9-40H-2D-15-DG**	
20.0	15…20xI_n	65	65	~	**KTU9-40H-2D-20-DG**	
25.0	15…20xI_n	65	65	~	**KTU9-40H-2D-25-DG**	
30.0	15…20xI_n	65	65	~	**KTU9-40H-2D-30-DG**	
35.0	14 x I_n	65	65	~	**KTU9-40H-2D-35-DG**	
40.0	12 x I_n	65	65	~	**KTU9-40H-2D-40-DG**	
KTU9-40H-3D — High Interrupting Capacity – 3-Pole						
0.5	15…20xI_n	100	100	50	**KTU9-40H-3D-0.5-DG**	
1.0	15…20xI_n	100	100	50	**KTU9-40H-3D-1-DG**	
2.0	15…20xI_n	100	100	50	**KTU9-40H-3D-2-DG**	
3.0	15…20xI_n	100	100	50	**KTU9-40H-3D-3-DG**	
4.0	15…20xI_n	100	100	50	**KTU9-40H-3D-4-DG**	
5.0	15…20xI_n	100	100	50	**KTU9-40H-3D-5-DG**	
6.0	15…20xI_n	100	100	50	**KTU9-40H-3D-6-DG**	
8.0	15…20xI_n	100	100	50	**KTU9-40H-3D-8-DG**	
10.0	15…20xI_n	100	100	50	**KTU9-40H-3D-10-DG**	**L** ❶
12.0	15…20xI_n	65	65	25	**KTU9-40H-3D-12-DG**	
15.0	15…20xI_n	65	65	25	**KTU9-40H-3D-15-DG**	
20.0	15…20xI_n	65	65	~	**KTU9-40H-3D-20-DG**	
25.0	15…20xI_n	65	65	~	**KTU9-40H-3D-25-DG**	
30.0	15…20xI_n	65	65	~	**KTU9-40H-3D-30-DG**	
35.0	14 x I_n	65	65	~	**KTU9-40H-3D-35-DG**	
40.0	12 x I_n	65	65	~	**KTU9-40H-3D-40-DG**	

Includes:

- Type 12 enclosure – dusttight
- KTU9 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❷

Modifications (Factory Assembled) ❸

KT9 Auxiliaries & Trip Contacts - Front Mount 250V max.	Add Suffix to Cat. Number
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-R**
1 NO SC+OL + 1 NO Auxiliary	**-S**

❶ KTU9 is 80% rated in this enclosure.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "DG" suffix to "DJ". Ex: Change KTU9-40H-2D-0.16-**DG** to KTU9-D-2D-0.16-**DJ**.
❸ Load Terminal Cover KT9-PEFC is included with any factory modifications.

Enclosed KTU9 Circuit Breaker - Type 4 / 12

Amp / Interrupt Rating					Painted Steel, Type 4 / 12 Enclosure	
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Dimension Code
KTU9-40H-2D — High Interrupting Capacity – 2-Pole						
0.5	15…20xI_n	100	100	50	**KTU9-40H-2D-0.5-WG**	
1.0	15…20xI_n	100	100	50	**KTU9-40H-2D-1-WG**	
2.0	15…20xI_n	100	100	50	**KTU9-40H-2D-2-WG**	
3.0	15…20xIn	100	100	50	**KTU9-40H-2D-3-WG**	
4.0	15…20xI_n	100	100	50	**KTU9-40H-2D-4-WG**	
5.0	15…20xI_n	100	100	50	**KTU9-40H-2D-5-WG**	
6.0	15…20xI_n	100	100	50	**KTU9-40H-2D-6-WG**	
8.0	15…20xI_n	100	100	50	**KTU9-40H-2D-8-WG**	W6 ❶
10.0	15…20xI_n	100	100	50	**KTU9-40H-2D-10-WG**	
12.0	15…20xI_n	65	65	25	**KTU9-40H-2D-12-WG**	
15.0	15…20xI_n	65	65	25	**KTU9-40H-2D-15-WG**	
20.0	15…20xI_n	65	65	~	**KTU9-40H-2D-20-WG**	
25.0	15…20xI_n	65	65	~	**KTU9-40H-2D-25-WG**	
30.0	15…20xI_n	65	65	~	**KTU9-40H-2D-30-WG**	
35.0	14 x I_n	65	65	~	**KTU9-40H-2D-35-WG**	
40.0	12 x I_n	65	65	~	**KTU9-40H-2D-40-WG**	
KTU9-40H-3D — High Interrupting Capacity – 3-Pole						
0.5	15…20xI_n	100	100	50	**KTU9-40H-3D-0.5-WG**	
1.0	15…20xI_n	100	100	50	**KTU9-40H-3D-1-WG**	
2.0	15…20xI_n	100	100	50	**KTU9-40H-3D-2-WG**	
3.0	15…20xI_n	100	100	50	**KTU9-40H-3D-3-WG**	
4.0	15…20xI_n	100	100	50	**KTU9-40H-3D-4-WG**	
5.0	15…20xI_n	100	100	50	**KTU9-40H-3D-5-WG**	
6.0	15…20xI_n	100	100	50	**KTU9-40H-3D-6-WG**	
8.0	15…20xI_n	100	100	50	**KTU9-40H-3D-8-WG**	W6 ❶
10.0	15…20xI_n	100	100	50	**KTU9-40H-3D-10-WG**	
12.0	15…20xI_n	65	65	25	**KTU9-40H-3D-12-WG**	
15.0	15…20xI_n	65	65	25	**KTU9-40H-3D-15-WG**	
20.0	15…20xI_n	65	65	~	**KTU9-40H-3D-20-WG**	
25.0	15…20xI_n	65	65	~	**KTU9-40H-3D-25-WG**	
30.0	15…20xI_n	65	65	~	**KTU9-40H-3D-30-WG**	
35.0	14 x I_n	65	65	~	**KTU9-40H-3D-35-WG**	
40.0	12 x I_n	65	65	~	**KTU9-40H-3D-40-WG**	

Includes:

- Type 4/12 enclosure – watertight, dusttight
- KTU9 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❷

Modifications (Factory Assembled) ❸

KT9 Auxiliaries & Trip Contacts - Front Mount 250V max.	Add Suffix to Cat. Number
1 NO Auxiliary	**-B**
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-R**
1 NO SC+OL + 1 NO Auxiliary	**-S**

❶ KTU9 up to 15 Amp is 100% rated in this enclosure. KTU9 20…30 Amp is 80% rated.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "WG" suffix to "WJ". Ex: Change KTU9-40H-2D-0.16-**WG** to KTU9-40H-2D-0.16-**WJ**.
❸ Load Terminal Cover KT9-PEFC is included with any factory modifications.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ❻❼

Amp / Horsepower Rating						Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R) 	
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❹❻❽❾	Dim Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CX7-9-10-✱-AS0.16A-A10-PG▼**	Q4
~	~	~	~	0.16…0.25	3.5	**CX7-9-10-✱-AS0.25A-A10-PG▼**	Q4
~	~	~	~	0.25…0.40	5.6	**CX7-9-10-✱-AS0.40A-A10-PG▼**	Q4
~	~	~	~	0.40…0.63	8.8	**CX7-9-10-✱-AS0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63…1.0	14	**CX7-9-10-✱-AS1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0…1.6	22	**CX7-9-10-✱-AS1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	35	**CX7-9-10-✱-AS2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CX7-9-10-✱-AS4.0A-A10-PG▼**	Q4
1	1-1/2	3	~	4.0…6.3	88	**CX7-9-10-✱-AS6.3A-A10-PG▼**	Q4
2	2	5	~	6.3…10	140	**CX7-12-10-✱-AS10A-A10-PG▼**	Q4
3	5	10	~	10…16	224	**CX7-16-10-✱-AS16A-A10-PG▼**	Q4
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CX7-9-10-✱-AH0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63...1.0	14	**CX7-9-10-✱-AH1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0...1.6	22	**CX7-9-10-✱-AH1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	33	**CX7-9-10-✱-AH2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CX7-9-10-✱-AH4.0A-A10-PG▼**	Q4
1	1-1/2	3	5	4.0…6.3	82	**CX7-9-10-✱-AH6.3A-A10-PG▼**	Q4
2	2	5	7-1/2	6.3…10	130	**CX7-12-10-✱-AH10A-A10-PG▼**	Q4
3	5	10	10	10…16	208	**CX7-16-10-✱-AH16A-A10-PG▼**	Q4
5	5	10	~	14.5…20	260	**CX7-23-10-✱-AH20A-A10-PG▼**	Q4
5	7-1/2	15	~	18…25	325	**CX7-23-10-✱-AH25A-A10-PG▼**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F1.71 for factory installed modifications

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-✱-AS0.16A-A10-**PG**▼ to CX7-9-10-✱-AS0.16A-A10-**PJ**▼.

❾ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ❹❻❼

Amp / Horsepower Rating						Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❹❻❽	Dim Code
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CX7-9E-10-✱-AS0.16A-A10-PG▼**	Q4
~	~	~	~	0.16…0.25	3.5	**CX7-9E-10-✱-AS0.25A-A10-PG▼**	Q4
~	~	~	~	0.25…0.40	5.6	**CX7-9E-10-✱-AS0.40A-A10-PG▼**	Q4
~	~	~	~	0.40…0.63	8.8	**CX7-9E-10-✱-AS0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63…1.0	14	**CX7-9E-10-✱-AS1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0…1.6	22	**CX7-9E-10-✱-AS1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	35	**CX7-9E-10-✱-AS2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CX7-9E-10-✱-AS4.0A-A10-PG▼**	Q4
1	1-1/2	3	~	4.0…6.3	88	**CX7-9E-10-✱-AS6.3A-A10-PG▼**	Q4
2	2	5	~	6.3…10	140	**CX7-12E-10-✱-AS10A-A10-PG▼**	Q4
3	5	10	~	10…16	224	**CX7-16E-10-✱-AS16A-A10-PG▼**	Q4
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CX7-9E-10-✱-AH0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63...1.0	14	**CX7-9E-10-✱-AH1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0...1.6	22	**CX7-9E-10-✱-AH1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	33	**CX7-9E-10-✱-AH2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CX7-9E-10-✱-AH4.0A-A10-PG▼**	Q4
1	1-1/2	3	5	4.0…6.3	82	**CX7-9E-10-✱-AH6.3A-A10-PG▼**	Q4
2	2	5	7-1/2	6.3…10	130	**CX7-12E-10-✱-AH10A-A10-PG▼**	Q4
3	5	10	10	10…16	208	**CX7-16E-10-✱-AH16A-A10-PG▼**	Q4
5	5	10	~	14.5…20	260	**CX7-23E-10-✱-AH20A-A10-PG▼**	Q4
5	7-1/2	15	~	18…25	325	**CX7-23E-10-✱-AH25A-A10-PG▼**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactors (for remote operation), with Electronic DC Coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB) + KT9-KN ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F1.71 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	**36-48V**
48E	**48-72V**
110E	**110-125V**
220E	**220-250V**

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ CX7-9E…23E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-✱-AS0.16A-A10-**PG**▼ to CX7-9-10-✱-AS0.16A-A10-**PJ**▼.

Enclosed Non-Reversing Combination Controller with E-Stop, AC Operation - Type 1/12K/IP66 ❶❼❽

Amp / Horsepower Rating						Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)	
Max. Horsepower ❷❸❹				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❺❼❾❿	Dim Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	CX7-9-10-✱-AS0.16A-A10-PG4U-9	Q4
~	~	~	~	0.16…0.25	3.5	CX7-9-10-✱-AS0.25A-A10-PG4U-9	Q4
~	~	~	~	0.25…0.40	5.6	CX7-9-10-✱-AS0.40A-A10-PG4U-9	Q4
~	~	~	~	0.40…0.63	8.8	CX7-9-10-✱-AS0.63A-A10-PG4U-9	Q4
~	~	1/2	1/2	0.63…1.0	14	CX7-9-10-✱-AS1.0A-A10-PG4U-9	Q4
~	~	3/4	~	1.0…1.6	22	CX7-9-10-✱-AS1.6A-A10-PG4U-9	Q4
1/2	1/2	1	1-1/2	1.6…2.5	35	CX7-9-10-✱-AS2.5A-A10-PG4U-9	Q4
3/4	3/4	2	3	2.5…4.0	52	CX7-9-10-✱-AS4.0A-A10-PG4U-9	Q4
1	1-1/2	3	~	4.0…6.3	88	CX7-9-10-✱-AS6.3A-A10-PG4U-9	Q4
2	2	5	~	6.3…10	140	CX7-12-10-✱-AS10A-A10-PG4U-9	Q4
3	5	10	~	10…16	224	CX7-16-10-✱-AS16A-A10-PG4U-9	Q4
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	CX7-9-10-✱-AH0.63A-A10-PG4U-9	Q4
~	~	1/2	1/2	0.63...1.0	14	CX7-9-10-✱-AH1.0A-A10-PG4U-9	Q4
~	~	3/4	~	1.0...1.6	22	CX7-9-10-✱-AH1.6A-A10-PG4U-9	Q4
1/2	1/2	1	1-1/2	1.6…2.5	33	CX7-9-10-✱-AH2.5A-A10-PG4U-9	Q4
3/4	3/4	2	3	2.5…4.0	52	CX7-9-10-✱-AH4.0A-A10-PG4U-9	Q4
1	1-1/2	3	5	4.0…6.3	82	CX7-9-10-✱-AH6.3A-A10-PG4U-9	Q4
2	2	5	7-1/2	6.3…10	130	CX7-12-10-✱-AH10A-A10-PG4U-9	Q4
3	5	10	10	10…16	208	CX7-16-10-✱-AH16A-A10-PG4U-9	Q4
5	5	10	~	14.5…20	260	CX7-23-10-✱-AH20A-A10-PG4U-9	Q4
5	7-1/2	15	~	18…25	325	CX7-23-10-✱-AH25A-A10-PG4U-9	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R) ❶
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactor (for remote operation), AC coil
- Multifunction 2-position Push Button and Emergency Stop ❼
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN) ❾
- Power wiring

This is a factory assembly.

Optional factory modifications are not available on this device.

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ This is a factory assembly. The KS7-C0C4R does not include knock-outs for field assembly of this starter.

❷ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❸ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.

❹ CX7 may be applied to single phase loads. Contact factory for these specifications.

❺ Other voltages available, see Section A in this catalog.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❼ Uses D7P-U2EFFEPX11 Two-Position Multifunction push button with legend I/O and D7P-MT44PX01 Emergency Stop Push Button.

❽ CPT not possible with KS7-C0C4R. Refer page F1.87 for dimensional information.

❾ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: CX7-9-10-✱-AS0.16A-A10-**PG**4U-9 becomes CX7-9-10-✱-AS0.16A-A10-**PJ**4U-9.

❿ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ❻❼

Amp / Horsepower Rating						Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R) 	
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❹❻❽❾	Dim Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CXU7-9-10-✱-AS0.16A-A10-PG▼**	Q4
~	~	~	~	0.16…0.25	3.5	**CXU7-9-10-✱-AS0.25A-A10-PG▼**	Q4
~	~	~	~	0.25…0.40	5.6	**CXU7-9-10-✱-AS0.40A-A10-PG▼**	Q4
~	~	~	~	0.40…0.63	8.8	**CXU7-9-10-✱-AS0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63…1.0	14	**CXU7-9-10-✱-AS1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0…1.6	22	**CXU7-9-10-✱-AS1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	35	**CXU7-9-10-✱-AS2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CXU7-9-10-✱-AS4.0A-A10-PG▼**	Q4
1	1-1/2	3	~	4.0…6.3	88	**CXU7-9-10-✱-AS6.3A-A10-PG▼**	Q4
2	2	5	~	6.3…10	140	**CXU7-12-10-✱-AS10A-A10-PG▼**	Q4
3	5	10	~	10…16	224	**CXU7-16-10-✱-AS16A-A10-PG▼**	Q4
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CXU7-9-10-✱-AH0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63...1.0	14	**CXU7-9-10-✱-AH1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0...1.6	22	**CXU7-9-10-✱-AH1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	33	**CXU7-9-10-✱-AH2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CXU7-9-10-✱-AH4.0A-A10-PG▼**	Q4
1	1-1/2	3	5	4.0…6.3	82	**CXU7-9-10-✱-AH6.3A-A10-PG▼**	Q4
2	2	5	7-1/2	6.3…10	130	**CXU7-12-10-✱-AH10A-A10-PG▼**	Q4
3	5	10	10	10…16	208	**CXU7-16-10-✱-AH16A-A10-PG▼**	Q4
5	5	10	~	14.5…20	260	**CXU7-23-10-✱-AH20A-A10-PG▼**	Q4
5	7-1/2	15	~	18…25	325	**CXU7-23-10-✱-AH25A-A10-PG▼**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F1.71 for factory installed modifications

Contactor
AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for specifications.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-✱-AS0.16A-A10-**PG**▼ to CXU7-9-10-✱-AS0.16A-A10-**PJ**▼.

❾ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ❹❻❼

Amp / Horsepower Rating						Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)	
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❹❻❽	Dim Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CXU7-9E-22-✱-AS0.16A-A10-PG▼**	Q4
~	~	~	~	0.16…0.25	3.5	**CXU7-9E-22-✱-AS0.25A-A10-PG▼**	Q4
~	~	~	~	0.25…0.40	5.6	**CXU7-9E-22-✱-AS0.40A-A10-PG▼**	Q4
~	~	~	~	0.40…0.63	8.8	**CXU7-9E-22-✱-AS0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63…1.0	14	**CXU7-9E-22-✱-AS1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0…1.6	22	**CXU7-9E-22-✱-AS1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	35	**CXU7-9E-22-✱-AS2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CXU7-9E-22-✱-AS4.0A-A10-PG▼**	Q4
1	1-1/2	3	~	4.0…6.3	88	**CXU7-9E-22-✱-AS6.3A-A10-PG▼**	Q4
2	2	5	~	6.3…10	140	**CXU7-12E-22-✱-AS10A-A10-PG▼**	Q4
3	5	10	~	10…16	224	**CXU7-16E-22-✱-AS16A-A10-PG▼**	Q4
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CXU7-9E-22-✱-AH0.63A-A10-PG▼**	Q4
~	~	1/2	1/2	0.63...1.0	14	**CXU7-9E-22-✱-AH1.0A-A10-PG▼**	Q4
~	~	3/4	~	1.0...1.6	22	**CXU7-9E-22-✱-AH1.6A-A10-PG▼**	Q4
1/2	1/2	1	1-1/2	1.6…2.5	33	**CXU7-9E-22-✱-AH2.5A-A10-PG▼**	Q4
3/4	3/4	2	3	2.5…4.0	52	**CXU7-9E-22-✱-AH4.0A-A10-PG▼**	Q4
1	1-1/2	3	5	4.0…6.3	82	**CXU7-9E-22-✱-AH6.3A-A10-PG▼**	Q4
2	2	5	7-1/2	6.3…10	130	**CXU7-12E-22-✱-AH10A-A10-PG▼**	Q4
3	5	10	10	10…16	208	**CXU7-16E-22-✱-AH16A-A10-PG▼**	Q4
5	5	10	~	14.5…20	260	**CXU7-23E-22-✱-AH20A-A10-PG▼**	Q4
5	7-1/2	15	~	18…25	325	**CXU7-23E-22-✱-AH25A-A10-PG▼**	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-25-TE)
- CA7 contactors (for remote operation), with Electronic DC coil
- Gray and black Type 1/12K; IP66 handle (KT9-SHB + KT9-KN) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F1.71 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	**36-48V**
48E	**48-72V**
110E	**110-125V**
220E	**220-250V**

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for these specifications.

❹ CXU7-9E…23E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Blanks are not available. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F1.86 for wiring diagram and F1.87 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-✱-AS0.16A-A10-**PG**▼ to CXU7-9-10-✱-AS0.16A-A10-**PJ**▼.

CX7 Non-Reversing Controller Modifications

Pilot Device Options - required	
Select one option only ❶❷❸	**Replace ▼ in catalog number with**
START-STOP Multi-function	**3U**
I-O Multi-function	**4U**
OFF-ON 2-Position Selector switch	**6**
HAND-OFF-AUTO 3-Position Selector switch	**7**
Run Pilot Light Green	**1G**
Run Pilot Light Red	**1R**
Overload Alarm Pilot Light	**1Y**
D7-N8 22mm Hole Plug	**0**
Additional KT9 Auxiliaries & Trip Contacts	
Front Mount 250V maximum	
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**

CXU7 Reversing Controller Modifications

Pilot Device Options - required	
Select one option only ❶❷❸	**Replace ▼ in catalog number with**
FOR-STOP-REV Multi-function	**3U**
UP-STOP-DOWN Multi-function	**4U**
OPEN-STOP-CLOSE Multi-function	**5U**
FOR-STOP-REV 3-Position Selector switch	**6**
UP-OFF-DOWN 3-Position Selector switch	**7**
OPEN-OFF-CLOSE 3-Position Selector switch	**8**
Overload Alarm Pilot Light	**1Y**
D7-N8 22mm Hole Plug	**0**
Additional KT7 Auxiliaries & Trip Contacts	
Front Mount 250V maximum	
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**

CX7 Non-Reversing Controller Additions

Addition	Add to end of catalog number
CA7 Contactor Accessories	
Electronic Interface ❹	**-JE**
Surge Suppressor RC	**-RC**
Surge Suppressor Varistor	**-V**
CA7 Auxiliary Contacts ❺❻	
1 NO Auxiliary	**-S10**
1 NC Auxiliary	**-S01**
1 NO + 1 NC Auxiliary	**-S11**
2 NO Auxiliaries	**-S20**
2 NC Auxiliaries	**-S02**
Alternate Aux. Contact Arrangement (CA7 only)	
1 NC in lieu of standard 1 NO	**-SX10**
2 NC in lieu of standard 2 NO (on CXU7 only)	**-SX2**
Unwired Terminal Blocks Specify quantity (▼)	**-▼TB**

CXU7 Reversing Controller Additions

Addition	Add to end of catalog number
CA7 Contactor Accessories	
Electronic Interface ❹	**-JE**
Surge Suppressor RC	**-RC**
Surge Suppressor Varistor	**-V**

❶ KS7-C0C4R only has (1) 22mm hole to accomodate (1) pilot device.
❷ Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X.
See Section H in this catalog for description (all suffix's ending in "U").
❸ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 380 VAC...575VAC require a control circuit transformer.
❹ CRI7E-24 will be used. CRI7E-12 by special order only.
❺ See page A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
❻ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.

CX7 KWIKstarter Enclosures for use with KTA9 Type E Motor Controllers and CA7 Contactors ❶❸

Component	Description	For Use With		Environmental Approvals	Catalog Number
		Type E Controller	Contactor		
	Enclosure for Combo KWIKstarter ❶ CX7/CXU7-9…23 CX7/CXU7-9E…23E	KTA9-32S KTA9-40H	CA7-9...23 CA7-9E…23E CAU7-9…23 CAU7-9E…23E	cUL Type 1/12K IEC IP66	**KS7-C0C4R**

Handle Accessory for CX7/CXU7 KWIKstarters ❶

Accessory	Description	For Use With	Color	Catalog Number
	Door Coupling Handle ❶ • Padlockable • NEMA Type 1/12K and IP66 • Includes handle coupling (shaft) • Requires KT7-KN1 Locking Knob	All KT7s	Gray/Black	**T.B.A.**
			Red/Yellow	**T.B.A.**
	Lockable Twist Knob • for use with KT7-SHB	All KT7s	Gray/Black	**KT9-KN**
	**Universal Connector for CX7/CXU7** • Provides electrical interconnection of KTA7 and CA7 (with AC or Electronic DC coil) • Applies to FVNR and FVR versions • Allows for mounting the CA7 on a single DIN rail	All KT7s	Black	**T.B.A. ❹**

CX7 KWIKstarter Pilot Device Kits (for use with KS7-C0C4R Type 1/12K) ❶❷❻

Kits	Description	Contact Blocks included		Catalog Number	
		NO	NC		
	Multi-Function Pushbutton kit Non-illuminated **START-STOP** **I-O**	1	1	**KS7-P3U** **KS7-P4U**	**See page C29 for**
	FOR-STOP-REV **UP-STOP-DOWN** **OPEN-STOP-CLOSE**	2	1	**KS7-P3U-REV** **KS7-P4U-REV** **KS7-P5U-REV**	
	Selector switch kits Non-illuminated, includes legend plate **ON-OFF** 2-Position	1	0	**KS7-P6**	
	HAND-OFF-AUTO 3-Position	2	0	**KS7-P7**	
	FOR-OFF-REV 3-Position **UP-OFF-DOWN** 3-Position **OPEN-OFF-CLOSE** 3-Position	2	0	**KS7-P6-REV** **KS7-P7-REV** **KS7-P8-REV**	
	Run Pilot Light or **Overload Alarm Pilot Light** Plastic operator with diffuser lens in Red, Green or Yellow, with integrated LED power module	Replace ✪ with color choice **R** = Red **G** = Green **Y** = Yellow		**KS7-P1✪24V ❺** **KS7-P1✪120V** **KS7-P1✪240V**	
	Hole Plug used to plug 22.5mm holes.	Gray Plastic		**D7-N8**	**See page H72**

❶ KS7-C0C4R is supplied with the following holes:
- (1) one 22mm hole for a Pilot Device option, select one kit from this page.
- (1) one 22mm hole for KT9-SHB (or SHRY) Disconnect or Reset handle.

❷ Plastic bezel is standard. Pilot Device Kits include D7-BX_ Base Mounted contact blocks. See Section H for more information.

❸ CPT not possible.

❹ Standard KT9-32S-PEC23 does not work in CX7/CXU7 Kwikstarters.

❺ KS7-P1✪24V can be used with 24VAC or 24VDC.

❻ KS7-C0C4R series B enclosures compatible to KTA9 series controllers
KS7-C0C4R series A enclosures compatible to KTA9 series controllers

Enclosed Non-Reversing Combination Controller, AC Operation - Type 4 / 12

Amp / Horsepower Rating						Painted Steel, Type 4 / 12 Enclosure 	
Max. Horsepower ❶❷				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❸❻	Dimension Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CX7-9-10-✱-AS0.16A-A10-WG**	**W6**
~	~	~	~	0.16…0.25	3.5	**CX7-9-10-✱-AS0.25A-A10-WG**	**W6**
~	~	~	~	0.25…0.40	5.6	**CX7-9-10-✱-AS0.40A-A10-WG**	**W6**
~	~	~	~	0.40…0.63	8.8	**CX7-9-10-✱-AS0.63A-A10-WG**	**W6**
~	~	1/2	1/2	0.63…1.0	14	**CX7-9-10-✱-AS1.0A-A10-WG**	**W6**
~	~	3/4	~	1.0…1.6	22	**CX7-9-10-✱-AS1.6A-A10-WG**	**W6**
1/2	1/2	1	1-1/2	1.6…2.5	35	**CX7-9-10-✱-AS2.5A-A10-WG**	**W6**
3/4	3/4	2	3	2.5…4.0	52	**CX7-9-10-✱-AS4.0A-A10-WG**	**W6**
1	1-1/2	3	~	4.0…6.3	88	**CX7-9-10-✱-AS6.3A-A10-WG**	**W6**
2	2	5	~	6.3…10	140	**CX7-12-10-✱-AS10A-A10-WG**	**W6**
3	5	10	~	10…16	224	**CX7-16-10-✱-AS16A-A10-WG**	**W6**
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CX7-9-10-✱-AH0.63A-A10-WG**	**W6**
~	~	1/2	1/2	0.63...1.0	14	**CX7-9-10-✱-AH1.0A-A10-WG**	**W6**
~	~	3/4	~	1.0...1.6	22	**CX7-9-10-✱-AH1.6A-A10-WG**	**W6**
1/2	1/2	1	1-1/2	1.6…2.5	33	**CX7-9-10-✱-AH2.5A-A10-WG**	**W6**
3/4	3/4	2	3	2.5…4.0	52	**CX7-9-10-✱-AH4.0A-A10-WG**	**W6**
1	1-1/2	3	5	4.0…6.3	82	**CX7-9-10-✱-AH6.3A-A10-WG**	**W6**
2	2	5	7-1/2	6.3…10	130	**CX7-12-10-✱-AH10A-A10-WG**	**W6**
3	5	10	10	10…16	208	**CX7-16-10-✱-AH16A-A10-WG**	**W6**
5	5	10	~	14.5…20	260	**CX7-23-10-✱-AH20A-A10-WG**	**W6**
5	7-1/2	15	~	18…25	325	**CX7-23-10-✱-AH25A-A10-WG**	**W6**
7-1/2	10	20	~	24…29	406	**CX7-30-10-✱-AH29A-A10-WG**	**W6**
7-1/2	10	25	~	27…32	448	**CX7-37-10-✱-AH32A-A10-WG**	**W6**
10	10	25	~	30...36	432	**CX7-37-10-✱-AH36A-A10-WG**	**W6**
10	10	30	~	34...40	480	**CX7-43-10-✱-AH40A-A10-WG**	**W6**
KTA7-45H High Interrupting Capacity							
3	3	7-1/2	10	6.3…10	130	**CX7-30-10-✱-AH10A-A10-WG**	**W7**
5	5	10	15	10…16	208	**CX7-30-10-✱-AH16A-A10-WG**	**W7**
5	7-1/2	15	20	14.5…20	260	**CX7-30-10-✱-AH20A-A10-WG**	**W7**
7-1/2	10	20	20	18…25	325	**CX7-30-10-✱-AH25A-A10-WG**	**W7**
7-1/2	10	20	25	23...32	416	**CX7-30-10-✱-AH32A-A10-WG**	**W7**
10	10	25	~	32…45	585	**CX7-37-10-✱-AH45A-A10-WG**	**W7**
10	15	30	~	32…45	585	**CX7-43-10-✱-AH45A-A10-WG**	**W7**

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KTA9 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❸
- Pilot device shown is factory installed option

See page F1.77 for factory installed modifications

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

❶ Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CX7**-9-10-✱-0.16A-A10-WG to **CBX7**-9-10-✱-0.16A-A10-WJ.

❸ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9-10-✱-0.16A-A10-**WG** to CX7-9-10-✱-0.16A-A10-**WJ**.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

Amp / Horsepower Rating						Painted Steel, Type 4 / 12 Enclosur3 	
Max. Horsepower ❶❷ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❸	Dimension Code
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CX7-9E-10-✱-AS0.16A-A10-WG**	W6
~	~	~	~	0.16…0.25	3.5	**CX7-9E-10-✱-AS0.25A-A10-WG**	W6
~	~	~	~	0.25…0.40	5.6	**CX7-9E-10-✱-AS0.40A-A10-WG**	W6
~	~	~	~	0.40…0.63	8.8	**CX7-9E-10-✱-AS0.63A-A10-WG**	W6
~	~	1/2	1/2	0.63…1.0	14	**CX7-9E-10-✱-AS1.0A-A10-WG**	W6
~	~	3/4	~	1.0…1.6	22	**CX7-9E-10-✱-AS1.6A-A10-WG**	W6
1/2	1/2	1	1-1/2	1.6…2.5	35	**CX7-9E-10-✱-AS2.5A-A10-WG**	W6
3/4	3/4	2	3	2.5…4.0	52	**CX7-9E-10-✱-AS4.0A-A10-WG**	W6
1	1-1/2	3	~	4.0…6.3	88	**CX7-9E-10-✱-AS6.3A-A10-WG**	W6
2	2	5	~	6.3…10	140	**CX7-12E-10-✱-AS10A-A10-WG**	W6
3	5	10	~	10…16	224	**CX7-16E-10-✱-AS16A-A10-WG**	W6
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CX7-9E-10-✱-AH0.63A-A10-WG**	W6
~	~	1/2	1/2	0.63...1.0	14	**CX7-9E-10-✱-AH1.0A-A10-WG**	W6
~	~	3/4	~	1.0...1.6	22	**CX7-9E-10-✱-AH1.6A-A10-WG**	W6
1/2	1/2	1	1-1/2	1.6…2.5	33	**CX7-9E-10-✱-AH2.5A-A10-WG**	W6
3/4	3/4	2	3	2.5…4.0	52	**CX7-9E-10-✱-AH4.0A-A10-WG**	W6
1	1-1/2	3	5	4.0…6.3	82	**CX7-9E-10-✱-AH6.3A-A10-WG**	W6
2	2	5	7-1/2	6.3…10	130	**CX7-12E-10-✱-AH10A-A10-WG**	W6
3	5	10	10	10…16	208	**CX7-16E-10-✱-AH16A-A10-WG**	W6
5	5	10	~	14.5…20	260	**CX7-23E-10-✱-AH20A-A10-WG**	W6
5	7-1/2	15	~	18…25	325	**CX7-23E-10-✱-AH25A-A10-WG**	W6
7-1/2	10	20	~	24…29	406	**CX7-30E-10-✱-AH29A-A10-WG**	W6
7-1/2	10	25	~	27…32	448	**CX7-37E-10-✱-AH32A-A10-WG**	W6
10	10	25	~	30...36	432	**CX7-37E-10-✱-AH36A-A10-WG**	W6
10	10	30	~	34...40	480	**CX7-43E-10-✱-AH40A-A10-WG**	W6
KTA7-45H High Interrupting Capacity							
3	3	7-1/2	10	6.3…10	130	**CX7-30E-10-✱-AH10A-A10-WG**	W7
5	5	10	15	10…16	208	**CX7-30E-10-✱-AH16A-A10-WG**	W7
5	7-1/2	15	20	14.5…20	260	**CX7-30E-10-✱-AH20A-A10-WG**	W7
7-1/2	10	20	20	18…25	325	**CX7-30E-10-✱-AH25A-A10-WG**	W7
7-1/2	10	20	25	23…32	416	**CX7-37E-10-✱-AH32A-A10-WG**	W7
10	10	25	~	32…45	585	**CX7-37E-10-✱-AH45A-A10-WG**	W7
10	15	30	~	32…45	585	**CX7-43E-10-✱-AH45A-A10-WG**	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT9 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactor (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❸
- Pilot device shown is factory installed option

See page F1.77 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See Coil Code tables on this page for codes**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ CX7 may be applied to single phase loads. Contact factory for these specifications.

❸ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9E-10-✱-0.16A-A10-**WG** to CX7-9E-10-✱-0.16A-A10-**WJ**.

❹ CX7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Enclosed Reversing Combination Controller, AC Operation - Type 4 / 12

Amp / Horsepower Rating						Painted Steel, Type 4 / 12 Enclosure	
Max. Horsepower ❶❷				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❸❻	Dimension Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CXU7-9-10-✱-AS0.16A-A10-WG**	W6
~	~	~	~	0.16…0.25	3.5	**CXU7-9-10-✱-AS0.25A-A10-WG**	W6
~	~	~	~	0.25…0.40	5.6	**CXU7-9-10-✱-AS0.40A-A10-WG**	W6
~	~	~	~	0.40…0.63	8.8	**CXU7-9-10-✱-AS0.63A-A10-WG**	W6
~	~	1/2	1/2	0.63…1.0	14	**CXU7-9-10-✱-AS1.0A-A10-WG**	W6
~	~	3/4	~	1.0…1.6	22	**CXU7-9-10-✱-AS1.6A-A10-WG**	W6
1/2	1/2	1	1-1/2	1.6…2.5	35	**CXU7-9-10-✱-AS2.5A-A10-WG**	W6
3/4	3/4	2	3	2.5…4.0	52	**CXU7-9-10-✱-AS4.0A-A10-WG**	W6
1	1-1/2	3	~	4.0…6.3	88	**CXU7-9-10-✱-AS6.3A-A10-WG**	W6
2	2	5	~	6.3…10	140	**CXU7-12-10-✱-AS10A-A10-WG**	W6
3	5	10	~	10…16	224	**CXU7-16-10-✱-AS16A-A10-WG**	W6
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CXU7-9-10-✱-AH0.63A-A10-WG**	W6
~	~	1/2	1/2	0.63...1.0	14	**CXU7-9-10-✱-AH1.0A-A10-WG**	W6
~	~	3/4	~	1.0...1.6	22	**CXU7-9-10-✱-AH1.6A-A10-WG**	W6
1/2	1/2	1	1-1/2	1.6…2.5	33	**CXU7-9-10-✱-AH2.5A-A10-WG**	W6
3/4	3/4	2	3	2.5…4.0	52	**CXU7-9-10-✱-AH4.0A-A10-WG**	W6
1	1-1/2	3	5	4.0…6.3	82	**CXU7-9-10-✱-AH6.3A-A10-WG**	W6
2	2	5	7-1/2	6.3…10	130	**CXU7-12-10-✱-AH10A-A10-WG**	W6
3	5	10	10	10…16	208	**CXU7-16-10-✱-AH16A-A10-WG**	W6
5	5	10	~	14.5…20	260	**CXU7-23-10-✱-AH20A-A10-WG**	W6
5	7-1/2	15	~	18…25	325	**CXU7-23-10-✱-AH25A-A10-WG**	W6
7-1/2	10	20	~	24…29	406	**CXU7-30-10-✱-AH29A-A10-WG**	W6
7-1/2	10	25	~	27…32	448	**CXU7-37-10-✱-AH32A-A10-WG**	W6
10	10	25	~	30...36	432	**CXU7-37-10-✱-AH36A-A10-WG**	W6
10	10	30	~	34...40	480	**CXU7-43-10-✱-AH40A-A10-WG**	W6
KTA9-45H High Interrupting Capacity							
3	3	7-1/2	10	6.3…10	130	**CXU7-30-22-✱-AH10A-A10-WG**	W7
5	5	10	15	10…16	208	**CXU7-30-22-✱-AH16A-A10-WG**	W7
5	7-1/2	15	20	14.5…20	260	**CXU7-30-22-✱-AH20A-A10-WG**	W7
7-1/2	10	20	20	18…25	325	**CXU7-30-22-✱-AH25A-A10-WG**	W7
7-1/2	10	20	25	23…32	416	**CXU7-37-22-✱-AH32A-A10-WG**	W7
10	10	25	~	32…45	585	**CXU7-37-22-✱-AH45A-A10-WG**	W7
10	15	30	~	32…45	585	**CXU7-43-22-✱-AH45A-A10-WG**	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT9 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactors (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❸
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F1.77 for factory installed modifications

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ CXU7 may be applied to single phase loads. Contact factory for these applications.

❸ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9-10-✱-0.16A-A10-**WG** to CXU7-9-10-✱-0.16A-A10-**WJ**.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 250 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

Amp / Horsepower Rating						Painted Steel, Type 4 / 12 Enclosure	
Max. Horsepower ❶❷				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❸	Dimension Code
Three Phase							
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	CXU7-9E-10-✱-AS0.16A-A10-WG	W6
~	~	~	~	0.16…0.25	3.5	CXU7-9E-10-✱-AS0.25A-A10-WG	W6
~	~	~	~	0.25…0.40	5.6	CXU7-9E-10-✱-AS0.40A-A10-WG	W6
~	~	~	~	0.40…0.63	8.8	CXU7-9E-10-✱-AS0.63A-A10-WG	W6
~	~	1/2	1/2	0.63…1.0	14	CXU7-9E-10-✱-AS1.0A-A10-WG	W6
~	~	3/4	~	1.0…1.6	22	CXU7-9E-10-✱-AS1.6A-A10-WG	W6
1/2	1/2	1	1-1/2	1.6…2.5	35	CXU7-9E-10-✱-AS2.5A-A10-WG	W6
3/4	3/4	2	3	2.5…4.0	52	CXU7-9E-10-✱-AS4.0A-A10-WG	W6
1	1-1/2	3	~	4.0…6.3	88	CXU7-9E-10-✱-AS6.3A-A10-WG	W6
2	2	5	~	6.3…10	140	CXU7-12E-10-✱-AS10A-A10-WG	W6
3	5	10	~	10…16	224	CXU7-16E-10-✱-AS16A-A10-WG	W6
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	CXU7-9E-10-✱-AH0.63A-A10-WG	W6
~	~	1/2	1/2	0.63...1.0	14	CXU7-9E-10-✱-AH1.0A-A10-WG	W6
~	~	3/4	~	1.0...1.6	22	CXU7-9E-10-✱-AH1.6A-A10-WG	W6
1/2	1/2	1	1-1/2	1.6…2.5	33	CXU7-9E-10-✱-AH2.5A-A10-WG	W6
3/4	3/4	2	3	2.5…4.0	52	CXU7-9E-10-✱-AH4.0A-A10-WG	W6
1	1-1/2	3	5	4.0…6.3	82	CXU7-9E-10-✱-AH6.3A-A10-WG	W6
2	2	5	7-1/2	6.3…10	130	CXU7-12E-10-✱-AH10A-A10-WG	W6
3	5	10	10	10…16	208	CXU7-16E-10-✱-AH16A-A10-WG	W6
5	5	10	~	14.5…20	260	CXU7-23E-10-✱-AH20A-A10-WG	W6
5	7-1/2	15	~	18…25	325	CXU7-23E-10-✱-AH25A-A10-WG	W6
7-1/2	10	20	~	24…29	406	CXU7-30E-10-✱-AH29A-A10-WG	W6
7-1/2	10	25	~	27…32	448	CXU7-37E-10-✱-AH32A-A10-WG	W6
10	10	25	~	30...36	432	CXU7-37E-10-✱-AH36A-A10-WG	W6
10	10	30	~	34...40	480	CXU7-43E-10-✱-AH40A-A10-WG	W6
KTA7-45H High Interrupting Capacity							
3	3	7-1/2	10	6.3…10	130	CXU7-30E-22-✱-AH10A-A10-WG	W7
5	5	10	15	10…16	208	CXU7-30E-22-✱-AH16A-A10-WG	W7
5	7-1/2	15	20	14.5…20	260	CXU7-30E-22-✱-AH20A-A10-WG	W7
7-1/2	10	20	20	18…25	325	CXU7-30E-22-✱-AH25A-A10-WG	W7
7-1/2	10	20	25	23…32	416	CXU7-37E-22-✱-AH32A-A10-WG	W7
10	10	25	~	32…45	585	CXU7-37E-22-✱-AH45A-A10-WG	W7
10	15	30	~	32…45	585	CXU7-43E-22-✱-AH45A-A10-WG	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KTA9 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT9-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactors (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT9-HTN) ❸
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F1.77 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	**24V**
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See Coil Code tables on this page for codes**

❶ **Horsepower ratings shown in the table above are for reference.**
The final selection of the controller depends on the actual motor full load current and service factor.

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ CXU7 may be applied to single phase loads. Contact factory for these applications.

❸ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9E-10-✱-0.16A-A10-**WG** to CXU7-9E-10-✱-0.16A-A10-**WJ**.

❹ CXU7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Non-Reversing and Reversing CX7 Combination Controller Modifications (Factory Assembled)

Description	Add Suffix to Catalog Number
Pilot Devices ❶	
START-STOP multi-function pushbutton	**3U**
ON-OFF multi-function pushbutton	**4U**
FOR-STOP-REV multi-function pushbutton	**3U**
UP-STOP-DOWN multi-function pushbutton	**4U**
OPEN-STOP-CLOSE multi-function pushbutton	**5U**
HAND-AUTO selector switch	**5**
OFF-ON selector switch	**6**
HAND-OFF-AUTO selector switch	**7**
FOR-OFF-REV selector switch	**6**
UP-OFF-DOWN selector switch	**7**
OPEN-OFF-CLOSE selector switch	**8**
Pilot light only ❸	**1**
Pilot lights only (2) ❸	**2**
Pilot light w/ START-STOP multi-function pushbutton ❸	**13U**
Pilot light w/ ON-OFF multi-function pushbutton ❸	**14U**
Pilot light w/ HAND-AUTO selector switch ❸	**15**
Pilot light w/ OFF-ON selector switch ❸	**16**
Pilot light w/ HAND-OFF-AUTO selector switch ❸	**17**
Control Power Transformer	
(with fused primary and secondary) *Primary volts* / *Secondary volts*	Replace (✱) in catalog # with the following codes ❷
208 / 120	**XA**
240 / 120	**XB**
480 / 120	**XC**
575 / 120	**XD**
380 / 110	**XG**
240 / 24	**XE**
480 / 24	**XF**
600 / 24	**XJ**
50 watt Standard Capacity	
KT9 Auxiliaries & Trip Contacts	
Front mount 250V maximum	
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-R**
1 NO SC+OL + 1 NO Auxiliary	**-S**
Side Mount 600V maximum	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
1 NC SC+OL + 1 NO Auxiliary	**-R10**
1 NC SC+OL + 1 NC Auxiliary	**-R11**

Description	Add Suffix to Catalog Number
Additional KT9 Trip Contacts - Side Mount (600V max)	
1 NO SC+OL + 1 NO SC	**-R00**
1 NO SC+OL + 1 NC SC	**-R01**
1 NC SC+OL + 1 NO SC	**-R10**
KT9 Accessories	
Undervoltage Release Module (Select coil voltage from table below)	**-UA-✱**
Shunt Release Module	**-AA-✱**
CA7 Auxiliary Contacts ❺	
1 NO Auxiliary	**-S10**
1 NC Auxiliary	**-S01**
1 NO + 1 NC Auxiliary	**-S11**
2 NO Auxiliaries	**-S20**
2 NC Auxiliaries	**-S02**
1 NO + 2 NC Auxiliary	**-S12**
2 NO + 1 NC Auxiliary	**-S21**
3 NO Auxiliaries	**-S30**
3 NC Auxiliaries	**-S03**
1 NO + 3 NC Auxiliary	**-S13**
3 NO + 1 NC Auxiliary	**-S31**
2 NO + 2 NC Auxiliary	**-S22**
4 NO Auxiliaries	**-S40**
4 NC Auxiliaries	**-S04**
Alternate Aux. Contact Arrangement (CA7 only)	
1 NC in lieu of standard 1 NO	**-SX10**
2 NC in lieu of standard 2 NO (on CXU7 only)	**-SX2**
CA7 Contactor Accessories	
Electronic Interface	**-JE ❹**
Surge Suppressor RC	**-RC**
Surge Suppressor Varistor	**-V**
Unwired Terminal Blocks Specify quantity (▼)	**-▼TB**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24V	24V	24V...28V
120V	**110V**	**120V**
230V	220...230V	~
260V	~	240...260V
277V	~	277V
400V	380...400V	~
480V	415V	480V

❶ Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X. See Section H in this catalog for description (all suffix's ending in "U").

❷ Factory modifications often change the enclosure size. Refer to factory for dimensions when critical to the installation.

❸ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 277 VAC...575VAC require a control circuit transformer.

❹ CRI7E-24 will be used. CRI7E-12 by special order only.

❺ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.

CX7 Explosion Proof Combination Controllers - NEMA Type 4/4X/7/9 with Type 4 Gaskets

Amp / Horsepower Rating							
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❺	Dimension Code
200V	230V	460V	575V				
KTA9-32S Standard Interrupting Capacity							
~	~	~	~	0.10…0.16	2.2	**CX7-9-10-✱-AS0.16A-A10-EZ**	EZ
~	~	~	~	0.16…0.25	3.5	**CX7-9-10-✱-AS0.25A-A10-EZ**	EZ
~	~	~	~	0.25…0.40	5.6	**CX7-9-10-✱-AS0.40A-A10-EZ**	EZ
~	~	~	~	0.40…0.63	8.8	**CX7-9-10-✱-AS0.63A-A10-EZ**	EZ
~	~	1/2	1/2	0.63…1.0	14	**CX7-9-10-✱-AS1.0A-A10-EZ**	EZ
~	~	3/4	~	1.0…1.6	22	**CX7-9-10-✱-AS1.6A-A10-EZ**	EZ
1/2	1/2	1	1-1/2	1.6…2.5	35	**CX7-9-10-✱-AS2.5A-A10-EZ**	EZ
3/4	3/4	2	3	2.5…4.0	52	**CX7-9-10-✱-AS4.0A-A10-EZ**	EZ
1	1-1/2	3	~	4.0…6.3	88	**CX7-9-10-✱-AS6.3A-A10-EZ**	EZ
2	2	5	~	6.3…10	140	**CX7-12-10-✱-AS10A-A10-EZ**	EZ
3	5	10	~	10…16	224	**CX7-16-10-✱-AS16A-A10-EZ**	EZ
KTA9-40H High Interrupting Capacity							
~	~	~	~	0.40...0.63	8.8	**CX7-9-10-✱-AH0.63A-A10-EZ**	EZ
~	~	1/2	1/2	0.63...1.0	14	**CX7-9-10-✱-AH1.0A-A10-EZ**	EZ
~	~	3/4	~	1.0...1.6	22	**CX7-9-10-✱-AH1.6A-A10-EZ**	EZ
1/2	1/2	1	1-1/2	1.6…2.5	33	**CX7-9-10-✱-AH2.5A-A10-EZ**	EZ
3/4	3/4	2	3	2.5…4.0	52	**CX7-9-10-✱-AH4.0A-A10-EZ**	EZ
1	1-1/2	3	5	4.0…6.3	82	**CX7-9-10-✱-AH6.3A-A10-EZ**	EZ
2	2	5	7-1/2	6.3…10	130	**CX7-12-10-✱-AH10A-A10-EZ**	EZ
3	5	10	10	10…16	208	**CX7-16-10-✱-AH16A-A10-EZ**	EZ
5	5	10	~	14.5…20	260	**CX7-23-10-✱-AH20A-A10-EZ**	EZ
5	7-1/2	15	~	18…25	325	**CX7-23-10-✱-AH25A-A10-EZ**	EZ
7-1/2	10	20	~	24…29	406	**CX7-23-10-✱-AH29A-A10-EZ**	EZ
7-1/2	10	25	~	27…32	448	**CX7-23-10-✱-AH32A-A10-EZ**	EZ
10	10	25	~	30...36	432	**CX7-23-10-✱-AH36A-A10-EZ**	EZ
10	10	30	~	34...40	480	**CX7-23-10-✱-AH40A-A10-EZ**	EZ
KTA7-45H High Interrupting Capacity							
3	3	7-1/2	10	6.3…10	130	**CX7-30-10-✱-AH10A-A10-EZ**	EZ
5	5	10	15	10…16	208	**CX7-30-10-✱-AH16A-A10-EZ**	EZ
5	7-1/2	15	20	14.5…20	260	**CX7-30-10-✱-AH20A-A10-EZ**	EZ
7-1/2	10	20	20	18…25	325	**CX7-30-10-✱-AH25A-A10-EZ**	EZ
7-1/2	10	20	25	23…32	416	**CX7-30-10-✱-AH32A-A10-EZ**	EZ
10	10	25	~	32…45	585	**CX7-37-10-✱-AH45A-A10-EZ**	EZ
10	15	30	~	32…45	585	**CX7-43-10-✱-AH45A-A10-EZ**	EZ

Includes:

- Class I, Div I, Group B, C & D – Class II, Div I, Group E, F & G enclosure Class III, Zone I, IIB & H2
- KT9 "Type E" Self-protected Combination Manual Motor Controller with 1 NO front mount auxiliary contact (Cat.# KT9-PE1-10)
- Terminal Adaptor for Combo Type E/F Applications (Cat.# KT9-40-TE or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring

Modifications (Factory Assembled)

KT9 Auxiliaries & Trip Contacts,	
Front Mount 250V max.	
1 NC Auxiliary	**-A**
1 NO + 1 NC Auxiliary	**-C**
2 NO Auxiliaries	**-D**
1 NO SC+OL + 1 NC Auxiliary	**-R**
1 NO SC+OL + 1 NO Auxiliary	**-S**
Side Mount 600V max.	
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
1 NC SC+OL + 1 NO Auxiliary	**-R10**
1 NC SC+OL + 1 NC Auxiliary	**-R11**
CA7 Contactor Accessories	**Add Suffix to Cat. Number**
1 NC Auxiliary	**-S01**
1 NO Auxiliary	**-S10**
Electronic Interface	**-JE**
Surge Suppressor RC	**-RC**
Surge Suppressor Varistor	**-V**
Enclosure Modifications	
Dual START/STOP pushbutton	**3**
ON/OFF selector switch	**6**
H-O-A	**7**
Breather/Drain	**-BD**

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ Magnetic trip is fixed at 14x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CX7**-9-10-✱-0.16A-A10-EZ to **CBX7**-9-10-✱-0.16A-A10-EZ.

❹ Other voltages available, see Section A in this catalog.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See tables on this page for codes**

❺ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Type E/F Simplex & Duplex Pump Controllers

CXP7-9...

Simplex Pump Controllers

A single KTA7 motor controller plus matching CA7 contactor can be combined in an enclosure as a Simplex Combination Controller for pumping applications. Additional space is provided for the customer to field addition of time clocks or float switches as required by the application. An environmentally approved thru-the-door handle provides for a required disconnect. These pump panels can be supplied with Suitable for Service Entrance (SUSE) label on demand. Type E/F pump panels are less expensive than the classic Construction Type A (Fusible) or Construction Type C (MCCB) versions shown in Section C of this catalog.

Type E/F Simplex Pump Controller Panels include:

- Contactor (with AC coil)
- Type E Self-protected motor controller
- "START" Momentary Push Button
- "HOA" Selector Switch
- A minimum of 6" x 10" extra back pan space
- UL Type rated enclosure

Duplex Pump Controllers

Two starter duplex panels can be fed from one power source or two power sources and include lead/lag control circuitry to meet customers' need in pumping and many other applications. Two environmentally approved thru-the-door handle disconnect mechanisms means no main feeder device is required and smaller and less expensive panel than a classic duplex panel as offered in Section C of this catalog. The following pages include a selection of duplex controllers and you can contact your Sprecher + Schuh representative to modify the selection.

Type E/F Duplex Pump Controller Panels include:

- (2) Contactors (AC coil) and (2) Type E/F self protected motor controllers
- (1) Electronic alternating relay
- (1) UL type rated enclosure
- Designed per alternation control diagram shown at bottom of page F1.85

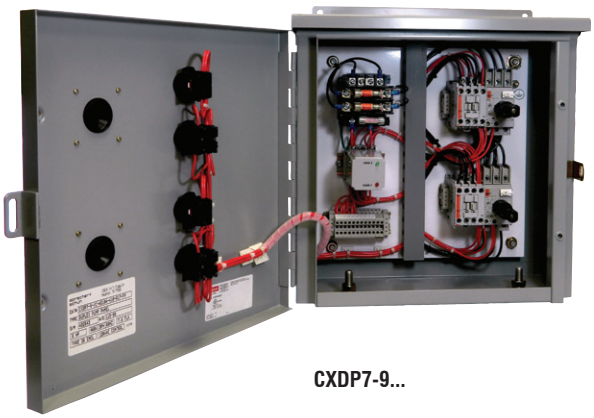

CXDP7-9...

Series CXP7 & Type E/F Combo Pump Panel

Max. Horsepower ❶❷❸ Three Phase				Current Adjustment Range (A)	Magnetic Response Current	Type 3R Rainproof (Metal)	Dimension Code	Type 4X Watertight Corrosion Resistant Non-metallic	Dimension Code
200V	230V	460V	575V			Catalog Number ❹❻		Catalog Number ❹❻	
KTA9-32S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.2	CXP7-9-10-✱-AS0.16A-A10-RG	O	CXP7-9-10-✱-AS0.16A-A10-CG	R/F
~	~	~	~	0.16…0.25	3.5	CXP7-9-10-✱-AS0.25A-A10-RG	O	CXP7-9-10-✱-AS0.25A-A10-CG	R/F
~	~	~	~	0.25…0.40	5.6	CXP7-9-10-✱-AS0.40A-A10-RG	O	CXP7-9-10-✱-AS0.40A-A10-CG	R/F
~	~	~	~	0.40…0.63	8.8	CXP7-9-10-✱-AS0.63A-A10-RG	O	CXP7-9-10-✱-AS0.63A-A10-CG	R/F
~	~	1/2	1/2	0.63…1.0	14	CXP7-9-10-✱-AS1.0A-A10-RG	O	CXP7-9-10-✱-AS1.0A-A10-CG	R/F
~	~	3/4	~	1.0…1.6	22	CXP7-9-10-✱-AS1.6A-A10-RG	O	CXP7-9-10-✱-AS1.6A-A10-CG	R/F
1/2	1/2	1	1-1/2	1.6…2.5	35	CXP7-9-10-✱-AS2.5A-A10-RG	O	CXP7-9-10-✱-AS2.5A-A10-CG	R/F
3/4	3/4	2	3	2.5…4.0	52	CXP7-9-10-✱-AS4.0A-A10-RG	O	CXP7-9-10-✱-AS4.0A-A10-CG	R/F
1	1-1/2	3	~	4.0…6.3	88	CXP7-9-10-✱-AS6.3A-A10-RG	O	CXP7-9-10-✱-AS6.3A-A10-CG	R/F
2	2	5	~	6.3…10	140	CXP7-12-10-✱-AS10A-A10-RG	O	CXP7-12-10-✱-AS10A-A10-CG	R/F
3	5	10	~	10…16	224	CXP7-16-10-✱-AS16A-A10-RG	O	CXP7-16-10-✱-AS16A-A10-CG	R/F
KTA9-40H High Interrupting Capacity									
~	~	~	~	0.40...0.63	8.8	CXP7-9-10-✱-AH0.63A-A10-RG	O	CXP7-9-10-✱-AH0.63A-A10-CG	R/F
~	~	1/2	1/2	0.63...1.0	14	CXP7-9-10-✱-AH1.0A-A10-RG	O	CXP7-9-10-✱-AH1.0A-A10-CG	R/F
~	~	3/4	~	1.0...1.6	22	CXP7-9-10-✱-AH1.6A-A10-RG	O	CXP7-9-10-✱-AH1.6A-A10-CG	R/F
1/2	1/2	1	1-1/2	1.6…2.5	33	CXP7-9-10-✱-AH2.5A-A10-RG	O	CXP7-9-10-✱-AH2.5A-A10-CG	R/F
3/4	3/4	2	3	2.5…4.0	52	CXP7-9-10-✱-AH4.0A-A10-RG	O	CXP7-9-10-✱-AH4.0A-A10-CG	R/F
1	1-1/2	3	5	4.0…6.3	82	CXP7-9-10-✱-AH6.3A-A10-RG	O	CXP7-9-10-✱-AH6.3A-A10-CG	R/F
2	2	5	7-1/2	6.3…10	130	CXP7-12-10-✱-AH10A-A10-RG	O	CXP7-12-10-✱-AH10A-A10-CG	R/F
3	5	10	10	10…16	208	CXP7-16-10-✱-AH16A-A10-RG	O	CXP7-16-10-✱-AH16A-A10-CG	R/F
5	5	10	~	14.5…20	260	CXP7-23-10-✱-AH20A-A10-RG	O	CXP7-23-10-✱-AH20A-A10-CG	R/F
5	7-1/2	15	~	18…25	325	CXP7-23-10-✱-AH25A-A10-RG	O	CXP7-23-10-✱-AH25A-A10-CG	R/F
7-1/2	10	20	~	24…29	406	CXP7-30-10-✱-AH29A-A10-RG	O	CXP7-30-10-✱-AH29A-A10-CG	R/F
7-1/2	10	25	~	27…32	448	CXP7-37-10-✱-AH32A-A10-RG	O	CXP7-37-10-✱-AH32A-A10-CG	R/F
10	10	25	~	30...36	432	CXP7-37-10-✱-AH36A-A10-RG	O	CXP7-37-10-✱-AH36A-A10-CG	R/F
10	10	30	~	34...40	480	CXP7-43-10-✱-AH40A-A10-RG	O	CXP7-43-10-✱-AH40A-A10-CG	R/F
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	CXP7-30-10-✱-AH10A-A10-RG	Q	CXP7-30-10-✱-AH10A-A10-CG	R/F
5	5	10	15	10…16	208	CXP7-30-10-✱-AH16A-A10-RG	Q	CXP7-30-10-✱-AH16A-A10-CG	R/F
5	7-1/2	15	20	14.5…20	260	CXP7-30-10-✱-AH20A-A10-RG	Q	CXP7-30-10-✱-AH20A-A10-CG	R/F
7-1/2	10	20	20	18…25	325	CXP7-30-10-✱-AH25A-A10-RG	Q	CXP7-30-10-✱-AH25A-A10-CG	R/F
7-1/2	10	20	25	23…32	416	CXP7-30-10-✱-AH32A-A10-RG	Q	CXP7-30-10-✱-AH32A-A10-CG	R/F
10	10	25	~	32…45	585	CXP7-37-10-✱-AH45A-A10-RG	Q	CXP7-37-10-✱-AH45A-A10-CG	R/F
10	15	30	~	32…45	585	CXP7-43-10-✱-AH45A-A10-RG	Q	CXP7-43-10-✱-AH45A-A10-CG	R/F

NOTE: Catalog Numbers, list Prices and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
024Z	24V	24V
0120	**110V**	**120V**
220W	**200-220V**	**208-240V**
0415	400-415V	~
0480 ❻	**440V**	**480V**
0600 ❻	550V	600V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Factory Modifications available	**See this page** **Contact factory**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA9-32S-4.0A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXP7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CXP7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CXP7**-9-10-✱-0.16A-A10-RG to **CBXP7**-9-10-✱-0.16A-A10-RG.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "RG" suffix to "RJ". Ex: Change CXP7-9-10-✱-0.16A-A10-**RG** to CXP7-9-10-✱-0.16A-A10-**RJ**.

❺ Other voltages available, see Section A in this catalog.

❻ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Series CXDP7 with Type E/F Combination Controller

Max. Horsepower Three Phase				Current Adjustment Range (A)	Magnetic Response Current	Type 3R Rainproof (Metal)	Dimension Code	Type 4X Watertight Corrosion Resistant Non-metallic	Dimension Code
200V	230V	460V	575V			Catalog Number ❷		Catalog Number ❷	
KTA9-32S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.2	CXDP7-9-10-∗-AS0.16A-A10-RG	R/F	CXDP7-9-10-∗-AS0.16A-A10-CG	R/F
~	~	~	~	0.16…0.25	3.5	CXDP7-9-10-∗-AS0.25A-A10-RG	R/F	CXDP7-9-10-∗-AS0.25A-A10-CG	R/F
~	~	~	~	0.25…0.40	5.6	CXDP7-9-10-∗-AS0.40A-A10-RG	R/F	CXDP7-9-10-∗-AS0.40A-A10-CG	R/F
~	~	~	~	0.40…0.63	8.8	CXDP7-9-10-∗-AS0.63A-A10-RG	R/F	CXDP7-9-10-∗-AS0.63A-A10-CG	R/F
~	~	1/2	1/2	0.63…1.0	14	CXDP7-9-10-∗-AS1.0A-A10-RG	R/F	CXDP7-9-10-∗-AS1.0A-A10-CG	R/F
~	~	3/4	~	1.0…1.6	22	CXDP7-9-10-∗-AS1.6A-A10-RG	R/F	CXDP7-9-10-∗-AS1.6A-A10-CG	R/F
1/2	1/2	1	1-1/2	1.6…2.5	35	CXDP7-9-10-∗-AS2.5A-A10-RG	R/F	CXDP7-9-10-∗-AS2.5A-A10-CG	R/F
3/4	3/4	2	3	2.5…4.0	52	CXDP7-9-10-∗-AS4.0A-A10-RG	R/F	CXDP7-9-10-∗-AS4.0A-A10-CG	R/F
1	1-1/2	3	~	4.0…6.3	88	CXDP7-9-10-∗-AS6.3A-A10-RG	R/F	CXDP7-9-10-∗-AS6.3A-A10-CG	R/F
2	2	5	~	6.3…10	140	CXDP7-12-10-∗-AS10A-A10-RG	R/F	CXDP7-12-10-∗-AS10A-A10-CG	R/F
3	5	10	~	10…16	224	CXDP7-16-10-∗-AS16A-A10-RG	R/F	CXDP7-16-10-∗-AS16A-A10-CG	R/F
KTA9-40H High Interrupting Capacity									
~	~	~	~	0.40...0.63	8.8	CXDP7-9-10-∗-AH0.63A-A10-RG	R/F	CXDP7-9-10-∗-AH0.63A-A10-CG	R/F
~	~	1/2	1/2	0.63...1.0	14	CXDP7-9-10-∗-AH1.0A-A10-RG	R/F	CXDP7-9-10-∗-AH1.0A-A10-CG	R/F
~	~	3/4	~	1.0...1.6	22	CXDP7-9-10-∗-AH1.6A-A10-RG	R/F	CXDP7-9-10-∗-AH1.6A-A10-CG	R/F
1/2	1/2	1	1-1/2	1.6…2.5	33	CXDP7-9-10-∗-AH2.5A-A10-RG	R/F	CXDP7-9-10-∗-AH2.5A-A10-CG	R/F
3/4	3/4	2	3	2.5…4.0	52	CXDP7-9-10-∗-AH4.0A-A10-RG	R/F	CXDP7-9-10-∗-AH4.0A-A10-CG	R/F
1	1-1/2	3	5	4.0…6.3	82	CXDP7-9-10-∗-AH6.3A-A10-RG	R/F	CXDP7-9-10-∗-AH6.3A-A10-CG	R/F
2	2	5	7-1/2	6.3…10	130	CXDP7-12-10-∗-AH10A-A10-RG	R/F	CXDP7-12-10-∗-AH10A-A10-CG	R/F
3	5	10	10	10…16	208	CXDP7-16-10-∗-AH16A-A10-RG	R/F	CXDP7-16-10-∗-AH16A-A10-CG	R/F
5	5	10	~	14.5…20	260	CXDP7-23-10-∗-AH20A-A10-RG	R/F	CXDP7-23-10-∗-AH20A-A10-CG	R/F
5	7-1/2	15	~	18…25	325	CXDP7-23-10-∗-AH25A-A10-RG	R/F	CXDP7-23-10-∗-AH25A-A10-CG	R/F
7-1/2	10	20	~	24…29	406	CXDP7-30-10-∗-AH29A-A10-RG	R/F	CXDP7-30-10-∗-AH29A-A10-CG	R/F
7-1/2	10	25	~	27…32	448	CXDP7-37-10-∗-AH32A-A10-RG	R/F	CXDP7-37-10-∗-AH32A-A10-CG	R/F
10	10	25	~	30...36	432	CXDP7-37-10-∗-AH36A-A10-RG	R/F	CXDP7-37-10-∗-AH36A-A10-CG	R/F
10	10	30	~	34...40	480	CXDP7-43-10-∗-AH40A-A10-RG	R/F	CXDP7-43-10-∗-AH40A-A10-CG	R/F
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	CXDP7-30-10-∗-AH10A-A10-RG	R/F	CXDP7-30-10-∗-AH10A-A10-CG	R/F
5	5	10	15	10…16	208	CXDP7-30-10-∗-AH16A-A10-RG	R/F	CXDP7-30-10-∗-AH16A-A10-CG	R/F
5	7-1/2	15	20	14.5…20	260	CXDP7-30-10-∗-AH20A-A10-RG	R/F	CXDP7-30-10-∗-AH20A-A10-CG	R/F
7-1/2	10	20	20	18…25	325	CXDP7-30-10-∗-AH25A-A10-RG	R/F	CXDP7-30-10-∗-AH25A-A10-CG	R/F
7-1/2	10	20	25	23…32	416	CXDP7-30-10-∗-AH32A-A10-RG	R/F	CXDP7-30-10-∗-AH32A-A10-CG	R/F
10	10	25	~	32…45	585	CXDP7-37-10-∗-AH45A-A10-RG	R/F	CXDP7-37-10-∗-AH45A-A10-CG	R/F
10	15	30	~	32…45	585	CXDP7-43-10-∗-AH45A-A10-RG	R/F	CXDP7-43-10-∗-AH45A-A10-CG	R/F

NOTE: Catalog Numbers, list Prices and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.

Contactor AC Coil Codes (∗) ❶

AC Coil Code	Voltage Range 50 Hz	60 Hz
024Z	24V	24V
0120	110V	120V
220W	200-220V	208-240V
0415	400-415V	~
0480 ❻	440V	480V
0600 ❻	550V	600V

Ordering Instructions

Specify Catalog Number	
Replace (∗) with Coil Code Factory Modifications available	See this page Contact factory

❶ Other voltages available, see Section A in this catalog.

❷ Catalog number (–A10) includes front-mounted auxiliary KT9-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA9 is tripped due to overload or short circuit; therefore, the KT9-PE1-10 auxiliary is available for customer use.

Custom Multi-Starter Control Panels

From 10 to 100 or more, consult the experts

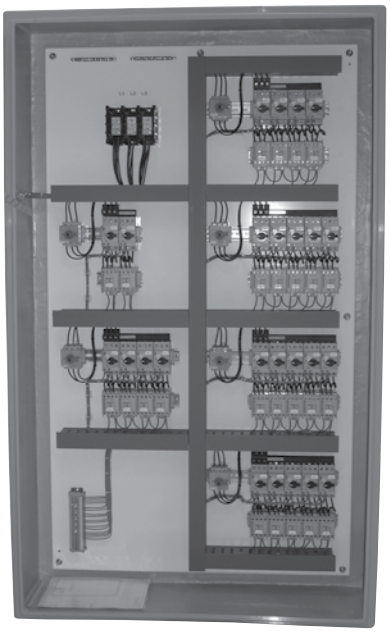

Your Motor Control + Protection Consultant

Sprecher + Schuh's slogan is "Motor control + protection consultant". This means part of our job is to be knowledgeable about these issues and to help customers choose components that not only comply with UL, NEC and CSA standards but also maximizes the SCCR rating of the assembled multi-starter panel, leading to increased protection of equipment and personnel.

Multiple KTA9, KTB9 or KTC9 motor controllers plus matching CA7 contactors can be combined in a single assembly as a multi-motor starter custom control panel. Three, 33, 133 or more motor controllers and KTU9 molded case circuit breakers, as well as other power components and control circuits, can be designed and assembled into a custom multi-motor starter by Sprecher + Schuh to meet customers' unique application requirements. These pages include a few pictures of custom multi-starter control panels built by Sprecher + Schuh. Contact your Sprecher + Schuh motor control and protection representative for consultation regarding design, quotations, or help explaining the complex UL, NEC and CSA codes that apply to a custom assembly.

For your **Custom application** contact customquotes@sprecherschuh.com

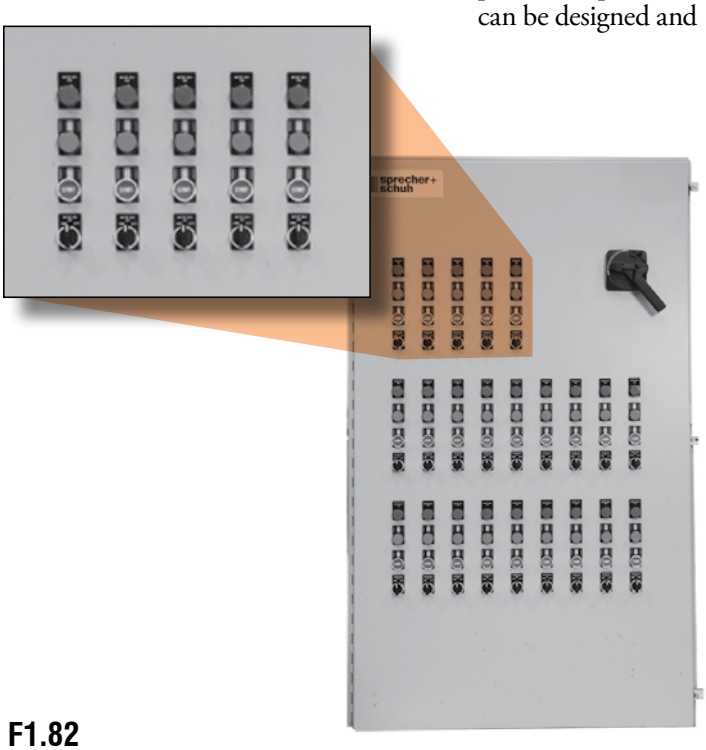

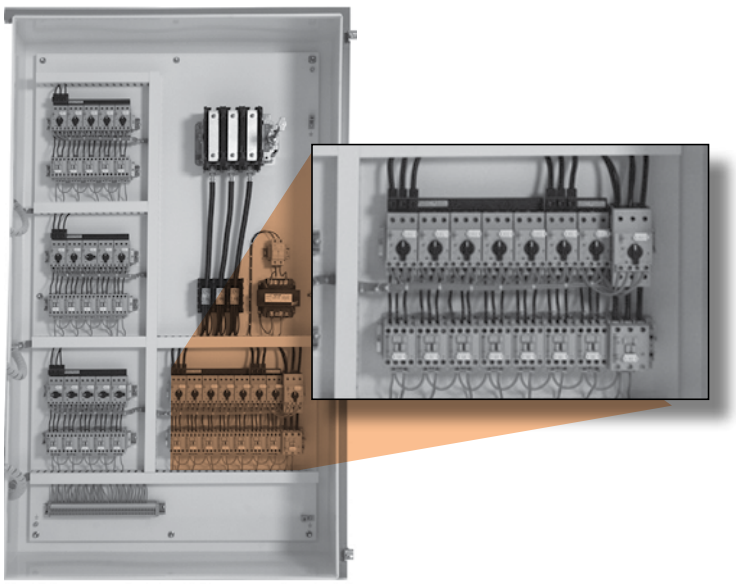

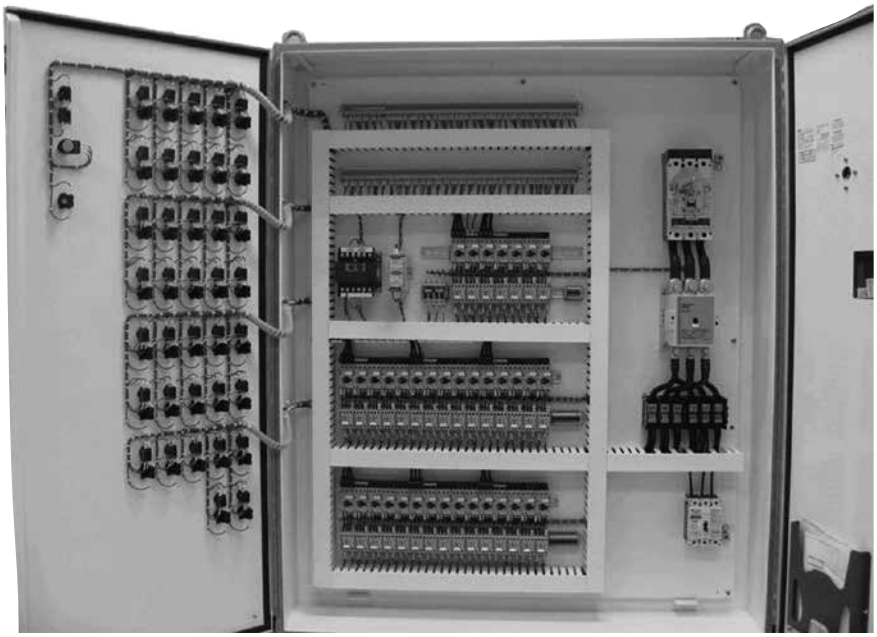

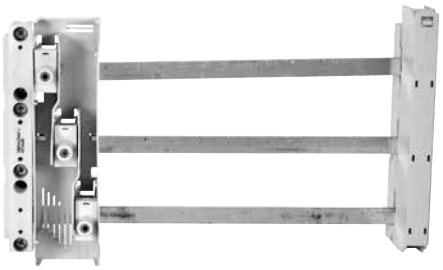

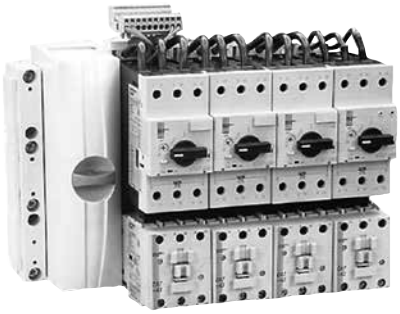

Short Circuit Current Ratings (SSCR)

Short Circuit Current Ratings as defined by UL is a hot topic of discussion within the controls marketplace.

UL 508A Industrial Control Panel specifications require every multiple motor starter panel assembly to be labeled with the Short-Circuit Current Rating (SCCR), which depends on the weakest component's KAIC rating. The SCCR rules are complicated and UL conducts classes around the country on this subject. Sprecher + Schuh conducted a survey of multi-starter panel builders which indicated an increased concern on the part of panel builders to comply with the UL regulations; yet many do not truly understand the complexity of the rules. This is another reason to consult the experts at Sprecher + Schuh.

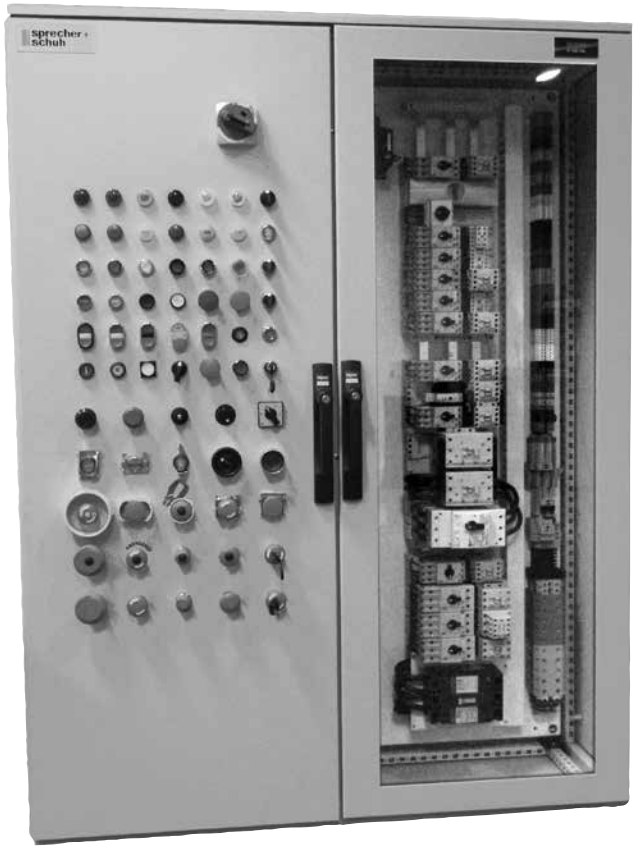

3-Phase 60mm Bus Bar System vertically arranged to maximize space

Custom Bus Bar Systems

Sprecher + Schuh has teamed-up with *Wöhner* to supply 3-phase 60 mm bus bar systems. Bus Bar systems offer more flexibility, and a smaller, more economical alternative to a Motor Control Center that uses 'bucket' design.

- Sprecher + Schuh can supply 3-phase 60 mm bus bar components for customer assembly into a control panel.
- We can help design a 3-phase 60 mm bus bar system and provide it with or without components and ship to the customer as open assembly.
- Sprecher + Schuh can help design a 3-phase 60 mm bus bar system and integrate that bus system into an enclosed assembly or multi-starter custom control panel to meet customers' unique specifications.

Please contact your local Sprecher + Schuh Representative or our Technical Support Team to help design our components to meet your needs, which can include building the custom control.

Single, Two and Three Phase Connection Diagram

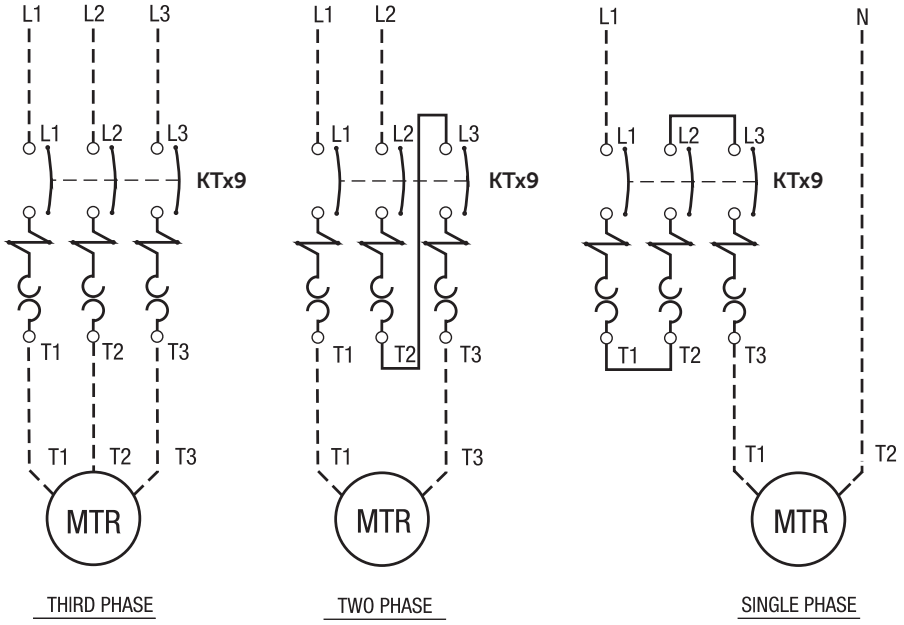

Type E/F Combination Controller Full Voltage Non-Reversing

AC Control with D7 Series Pilot Devices

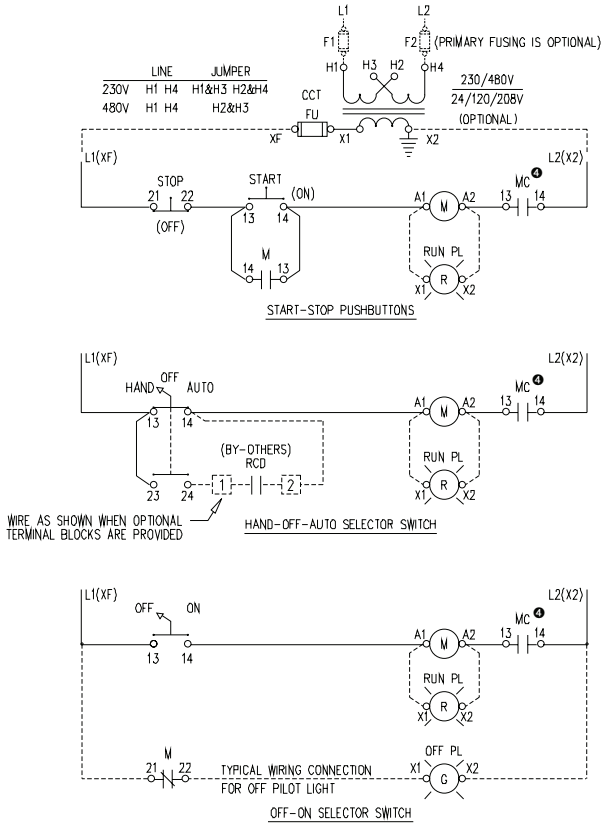

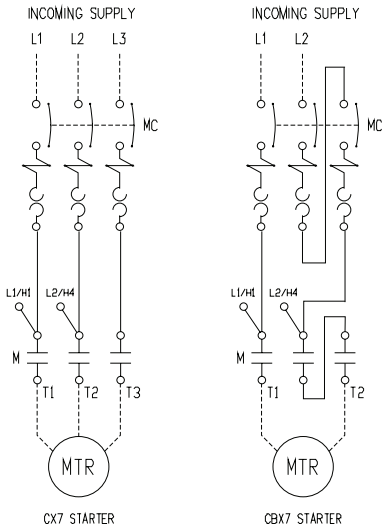

NOTES:
1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER
2) MC: KT9 :TYPE E" MOTOR CONTROLLER
3) X2 TERMINAL GROUNDED AS STANDARD, REMOVE GROUND IF NOT REQUIRED
4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

KTA9 Type E/F Combination 3-PH FVNR Duplex Alternating Panel
with H-O-A, Lead, Lag and Stop 1-Pole Float Switches

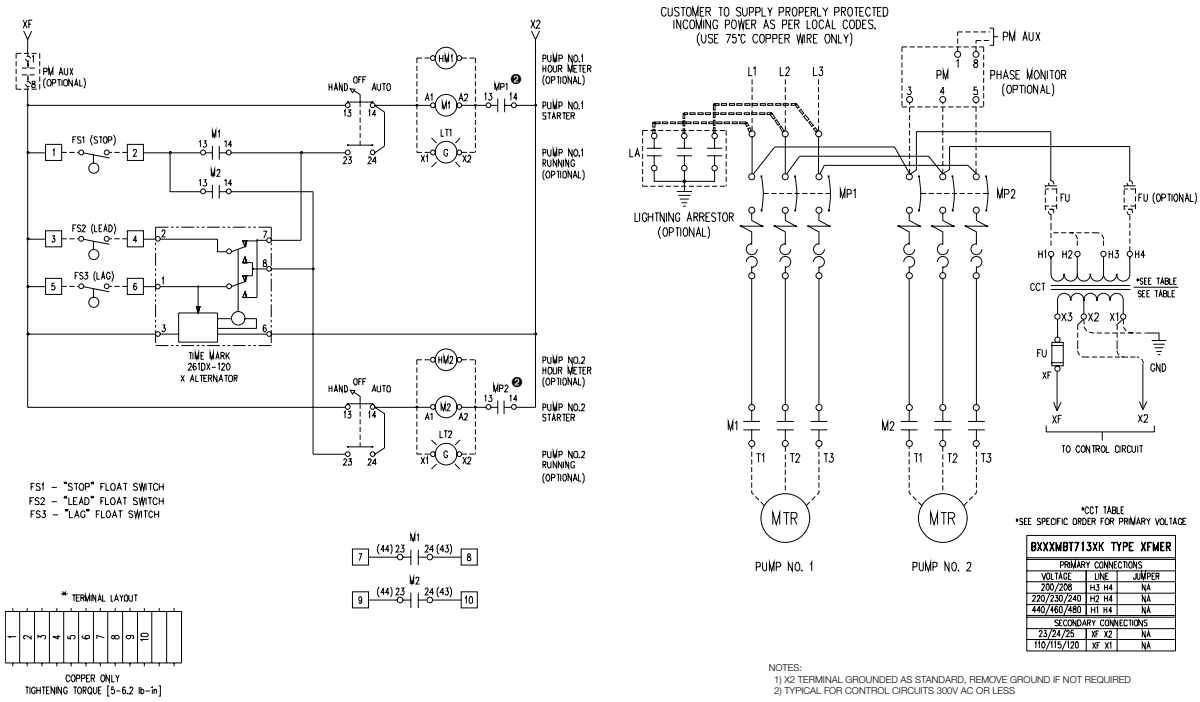

BXXXMBT713XK TYPE XFMER		
PRIMARY CONNECTIONS		
VOLTAGE	LINE	JUMPER
200/208	H3 H4	NA
220/230/240	H2 H4	NA
440/460/480	H1 H4	NA
SECONDARY CONNECTIONS		
23/24/25	XF X2	NA
110/115/120	XF X1	NA

KTA9 Type E/F Combination 3-PH FVNR Duplex Alternating Panel
with H-O-A, Alarm Circuit, Lead, Lag, Stop, 1-Pole Float Switches

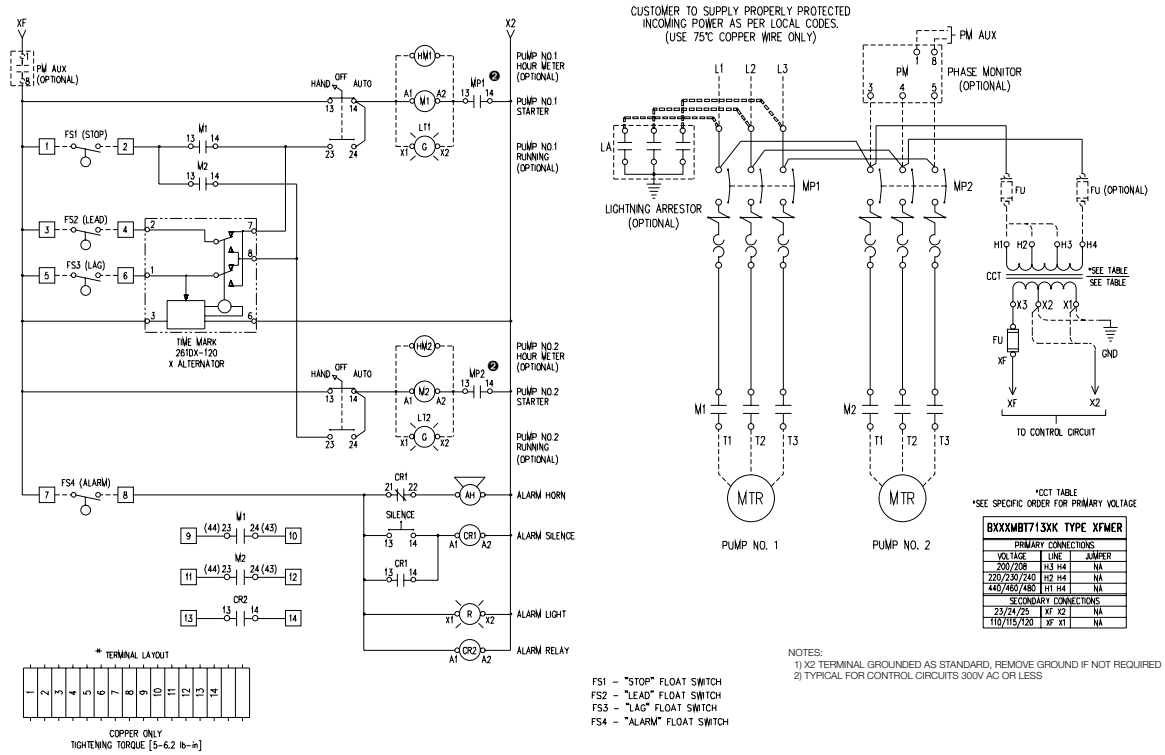

BXXXMBT713XK TYPE XFMER		
PRIMARY CONNECTIONS		
VOLTAGE	LINE	JUMPER
200/208	H3 H4	NA
220/230/240	H2 H4	NA
440/460/480	H1 H4	NA
SECONDARY CONNECTIONS		
23/24/25	XF X2	NA
110/115/120	XF X1	NA

ECombo/EComboPlus/CX7 KWIKstarters Non-Reversing

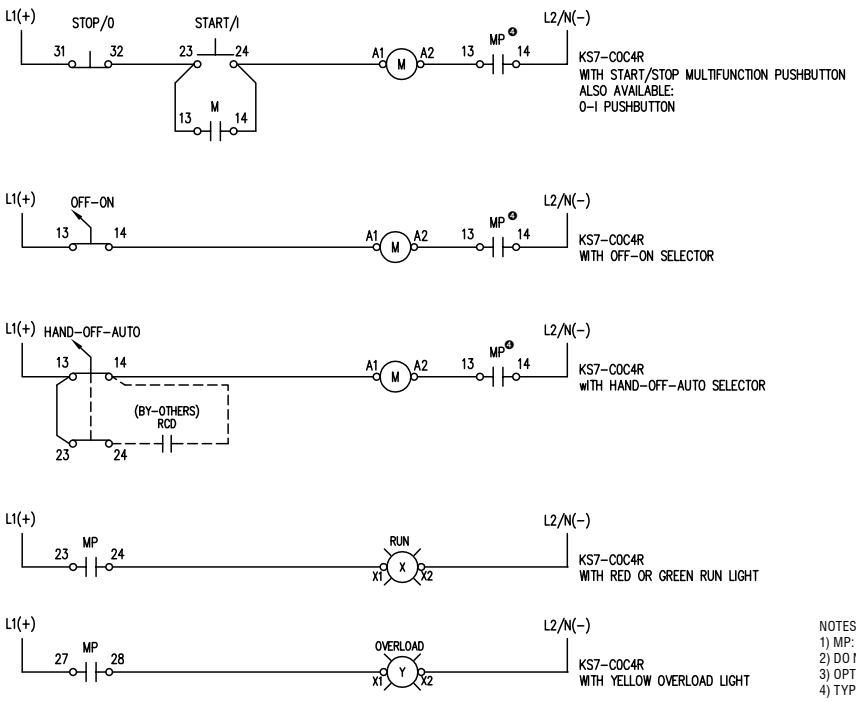

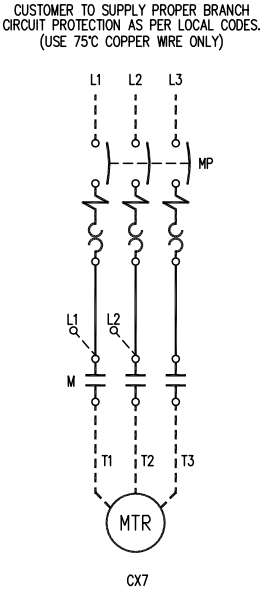

NOTES:
1) MP: KT9 "TYPE E" MOTOR CONTROLLER
2) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
3) OPTIONAL RUN LIGHT, MAYBE RED OR GREEN
4) TYPICAL FORCONTROL CIRCUITS 300V AC OR LESS

ECombo/EComboPlus/CXU7 KWIKstarters Reversing

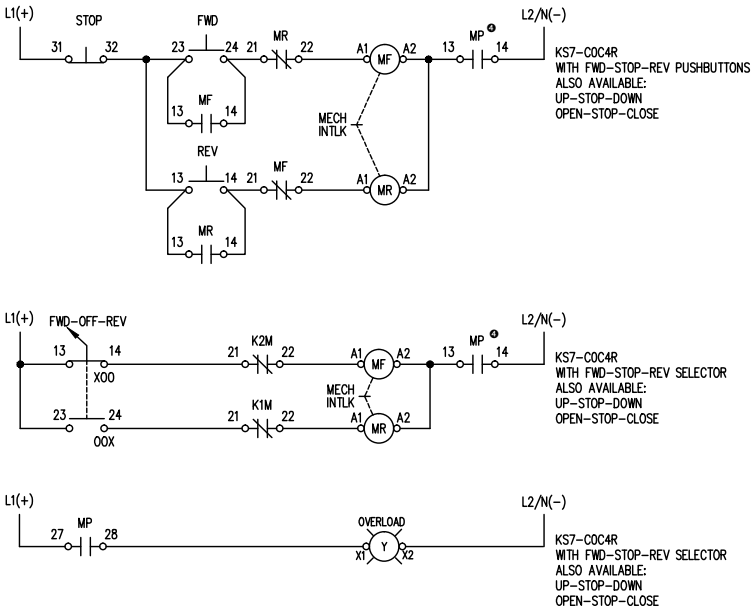

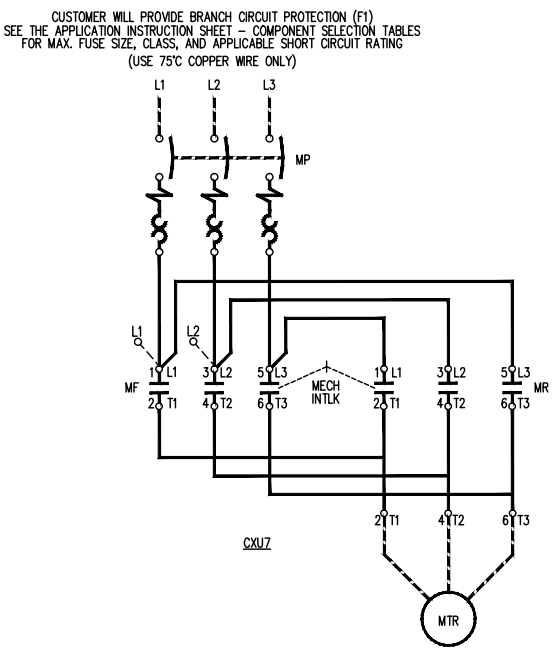

NOTES:
1) MECHANICAL INTERLOCK
2) MP: KT9 "TYPE E" MOTOR CONTROLLER
3) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
4) TYPICAL FORCONTROL CIRCUITS 300V AC OR LESS

CX7/CXU7 KWIKstarter Enclosure KS7-COC4R *(Dimension Code Q4)*

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes.

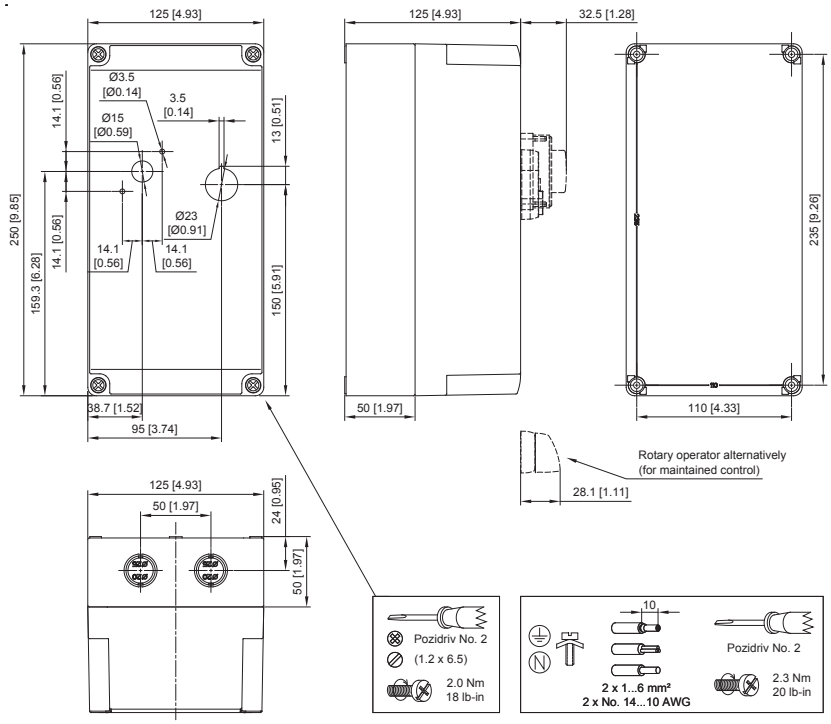

Enclosure Dimensions

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes. See dimension drawings on next page.

TYPE 4/4X/12K - IP66 ENCLOSURE

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan	
AY	1	6.42	3.85	4.90	N/A	N/A	5.63	N/A	N/A

TYPE-4/4X/12 ENCLOSURE

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan	
Q5	2	7.00	5.03	5.02	4.3	4.21	6.18	N/A	N/A
Q6	3	7.00	7.00	6.02	5.3	6.18	6.18	N/A	N/A
Q7	4	11.87	7.31	10.6	7.23	6.54	11.10	N/A	N/A

TYPE-4/12 & 12 ENCLOSURES

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan		H
W6	5	9.84	7.87	8.24	5.31	5.31	9.13	9.09	7.13	-
W7	5	13.78	11.81	10.2	7.28	9.25	13.07	13.03	11.06	-
L	6	8	6	6	5.53	4	8.75	6.75	4.88	9.5

TYPE 4/7/9 ENCLOSURES

Encl. ID Dim.	Figure No.	Mtg. Dim. A	B	C	Inside Dim. D	Outside Dim. E	F	G	H	Conduit Entry Top & Bot
EX	7	3.25	7.75	3.5	6.0	3.0	4.56	7.06	6.25	0.75
EY	7	5.50	8.50	5.50	5.50	6.0	7.0	7.0	7.38	1.0
EZ	8	9.13	4.50	6.0	8.0	6.63	9.25	11.25	9.34	1.50

Enclosures

See Enclosure Dimension Charts on Previous Page.



FIGURE NO. 1

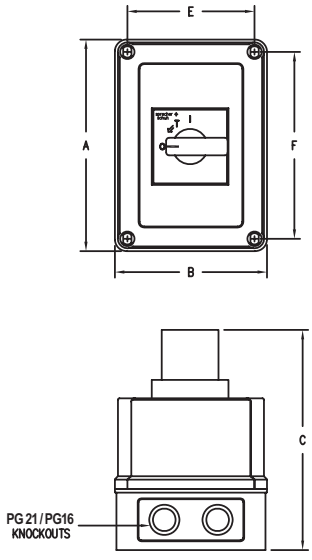

FIGURE NO. 2

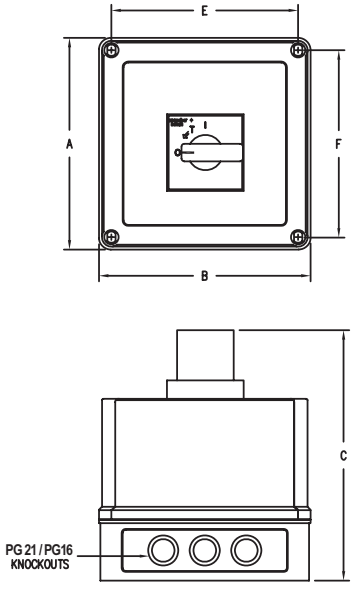

FIGURE NO. 3

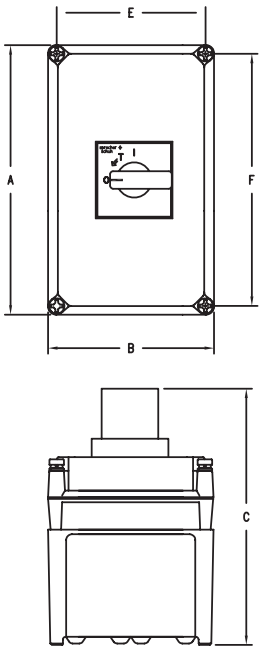

FIGURE NO. 4

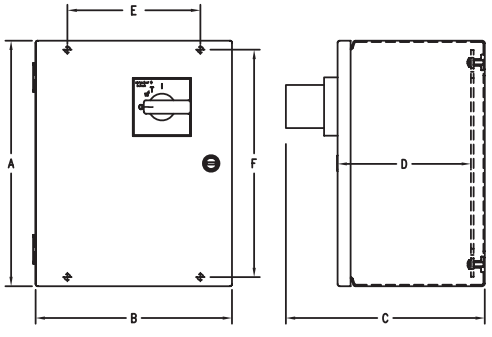

TYPE 4/12
FIGURE NO. 5

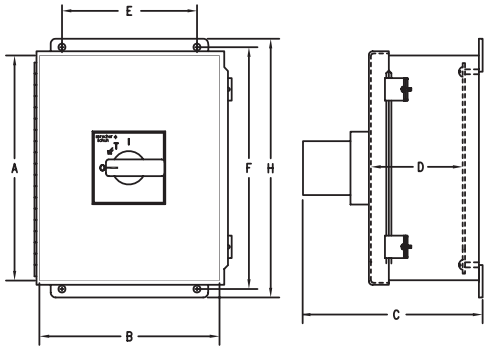

TYPE 12
FIGURE NO. 6

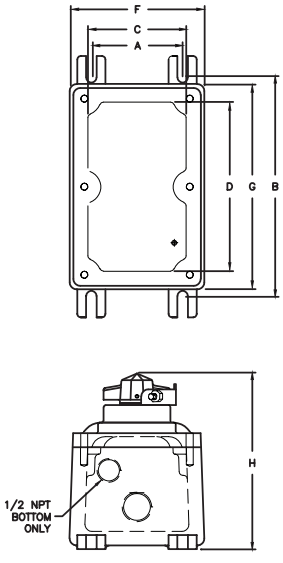

FIGURE NO. 7

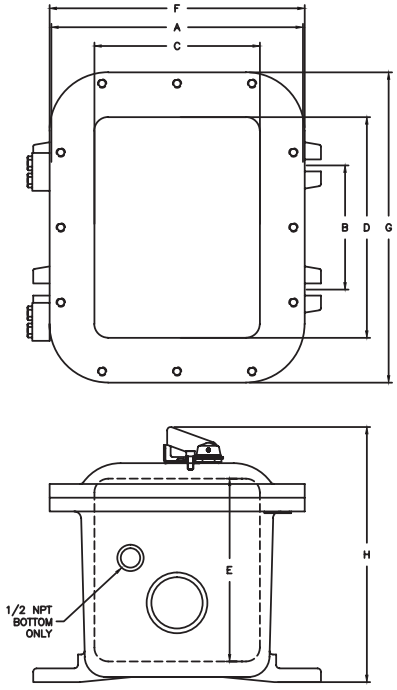

FIGURE NO. 8

Series KT5 Manual Motor Controllers

Versatile, convenient and space saving… for a variety of applications

Sprecher+Schuh's KT5 Manual Motor Controllers are UL Listed as Manual Motor Controllers with optional approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation.

Group motor installations eliminate the need for individual branch short circuit protective devices for each motor circuit, reducing panel space, installation & wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group".

According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

- Disconnect for Motor Branch Circuit
- Manual Switching (Motor control means)
- Overload Protection (Thermal Protection)

These devices meet requirement of Motor Protective Switching Devices (MPSD) according to IEC 60947-4-1 and Circuit Beaker according to IEC 60947-2 standard for application outside of North America.

These devices provide the following functions.

- Disconnect for Motor Branch Circuit
- Magnetic Short-circuit Protection
- Thermal Overload Protection
- Manual Switching (Motor control means)

KT5 devices provide trip class 10A overload protection and phase loss sensitivity protection. These are suitable for single- and three-phase applications.

Group Installation with MPCBs

There is only one Branch Circuit Protective Device (BCPD) for the "Group". Group installation has been successfully used for many years in the U.S. and Canada. It allows "two motors or one or more motors and other loads to be connected to the same branch-circuit…" The most restrictive part of the conditions specified for Group Installation is the requirement for the protection of the conductors for each motor circuit.

The image below shows an example that illustrates installations involving multiple motors with a single BCPD protecting the entire "Group".

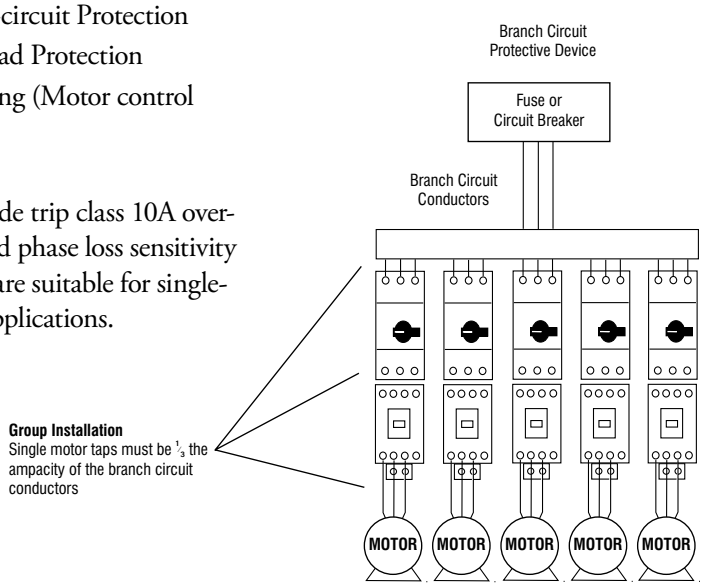

Group Installation
Single motor taps must be 1/3 the ampacity of the branch circuit conductors

KTA5 Manual Motor Controllers

Max. kW, 3-Phase — AC-3 ❶				Typical Three Phase [HP] ❶				Max. Short Circuit Current (kA)		Current Adjustment Range [A]	Magnetic Release Response Current [A]	Catalog Number
230V	400/415V	500V	690V	200V	230V	460V	575V	460V	575V			
~	0.02	0.06	0.06	~	~	~	~	100	30	0.10…0.16	2	**KTA5-32A-0.16A**
~	0.04	0.09	0.09	~	~	~	~	100	30	0.16…0.25	3.1	**KTA5-32A-0.25A**
0.06	0.09	0.12	0.18	~	~	~	0.25	100	30	0.25…0.40	5	**KTA5-32A-0.4A**
0.09	0.18	0.18	0.25	~	~	0.25	0.33	100	30	0.40…0.63	7.9	**KTA5-32A-0.63A**
0.18	0.25	0.37	0.55	~	~	0.5	0.75	100	30	0.63…1.0	12.5	**KTA5-32A-1.0A**
0.25	0.55	0.75	1.1	0.25	0.33	1	1	100	30	1.0…1.6	20	**KTA5-32A-1.6A**
0.37	0.75	1.1	1.8	0.5	0.75	1.5	2	75	30	1.6…2.5	31.3	**KTA5-32A-2.5A**
0.75	1.5	2.2	3	1	1	~	~	75	18	2.5…4.0	50	**KTA5-32A-4.0A**
1.5	2.2	3	4	1.5	2	5	5	50	18	4.0…6.3	78.8	**KTA5-32A-6.3A**
2.2	4	6.3	7.5	3	3	7.5	10	50	18	6.3…10	150	**KTA5-32A-10A**
3	5.5	6.3	7.5	3	3	7.5	10	50	18	8.0….12	180	**KTA5-32A-12A**
4	7.5	10	13	5	5	10	15	15	18	10…16	240	**KTA5-32A-16A**
5.5	10	11	17	5	7.5	15	20	15	18	16…20	300	**KTA5-32A-20A**
5.5	11	15	22	7.5	7.5	20	20	15	18	20…25	375	**KTA5-32A-25A**
7.5	15	20	25	7.5	10	25	30	15	18	25…32	480	**KTA5-32A-32A**

Horsepower ratings shown in the table are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range.
  Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A.
  Select Catalog Number KTA5-32A-4.0A

KTA5 Selection Using Interrupting Rating/Breaking Capacity

Catalog Number	Breaking Capacity, IEC 60947-2														
	230V AC			400V AC			440V AC			500V AC			690V AC		
	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ❷ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ❷ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ❷ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ❷ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ❷ [A]
KTA5-32A-0.16A	50	100		50	100		30	100		30	100		30	100	
KTA5-32A-0.25A	50	100		50	100		30	100		30	100		30	100	
KTA5-32A-0.4A	50	100		50	100		30	100		30	100		30	100	
KTA5-32A-0.63A	50	100		50	100		30	100	~❸	30	100	~❸	30	100	~❸
KTA5-32A-1.0A	50	100		50	100		30	100		30	100		30	100	
KTA5-32A-1.6A	50	100	~❸	50	100	~❸	30	100		30	100		30	100	
KTA5-32A-2.5A	50	75		50	75		10	30	25 ❹	10	20	25 ❹	5	10	25 ❹
KTA5-32A-4.0A	50	75		50	75		6	18	25 ❹	6	15	25 ❹	2	3	25 ❹
KTA5-32A-6.3A	50	50		50	50		6	18	63 ❹	6	10	63 ❹	2	3	40 ❹
KTA5-32A-10A	50	50		50	50		6	18	63 ❹	6	10	63 ❹	2	3	50 ❹
KTA5-32A-12A	25	50	80 ❹	25	50	80 ❹	6	15	63 ❹	6	10	63 ❹	2	3	50 ❹
KTA5-32A-16A	15	15	40 ❹	15	15	40 ❹	4	6	63 ❹	4	6	63 ❹	2	3	63 ❹
KTA5-32A-20A	10	15	125 ❹	10	15	125 ❹	3	6	125 ❹	3	6	125 ❹	2	3	80 ❹
KTA5-32A-25A	10	15	125 ❹	10	15	125 ❹	3	6	125 ❹	3	6	125 ❹	2	3	100 ❹
KTA5-32A-32A	10	15	125 ❹	10	15	125 ❹	3	6	125 ❹	3	6	125 ❹	2	3	100 ❹

❶ Horsepower ratings shown are for reference. The final selection of the controller depends on the actual motor full load current.
❷ Back-up fuses are type gG, aM.
❸ No back-up fuse required if Icc<Ics.
❹ Rated back-up fuse for short-circuit up to 50 kA.

Accessories for KT5

Accessory	Description	Auxiliary N.O	Auxiliary N.C	Connection Diagram and Terminal Markings ❷	For Use With	Pkg Qty	Catalog Number
	Front mounted Auxiliary Contact • No additional space required • 1 and 2-pole	1	1		KT5	10	**KT5-PE1-11**
		1	0				**KT5-PE1-10**
		0	1				**KT5-PE1-01**
		2	0				**KT5-PE1-20**
	Right-side-mounted Auxiliary Contact • 2-pole • Adds 9 mm to the width of the Manual Motor Starter • Use compact bus bars with 54 mm spacing	1	1		KT5	2	**KT5-PA1-11**
		2	0				**KT5-PA1-20**
		0	2				**KT5-PA1-02**
		Lead Contacts					**KT5-PA1-20L**
		2	0				

Trip Contacts

Accessory	Description	Auxiliary Contacts N.O	Auxiliary Contacts N.C	Connection Diagram and Terminal Markings ❷	For Use With	Pkg Qty	Catalog Number
	Right-side-mounted Trip Signaling Contact • 2-pole • Adds 9 mm to the width of the Manual Motor Starter • Use compact bus bars with 54 mm spacing	1	1		KT5	2	**KT5-PAF1-S11**
		2	0				**KT5-PAF1-S20**
		0	2				**KT5-PAF1-S02**

Accessories for KT5

Accessory	Description	Connection Diagram	AC Coil Voltage	Pkg Qty	For Use With	Catalog Number
	Undervoltage Trip Release • Left-side mounted • Adds 18 mm to the width of the Manual Motor Starter		20V, 50 Hz/ 24V, 60 Hz	1	KT5	**KT5-UA-24V**
			24V, 50 Hz			**KT5-UA-28V**
			48V, 50 Hz			**KT5-UA-48V**
			60V, 50 Hz			**KT5-UA-60V**
			110V, 50 Hz/ 120V, 60 Hz			**KT5-UA-120V**
			208V, 60 Hz			**KT5-UA-208V**
			230V, 50 Hz/ 240V, 60 Hz			**KT5-UA-240V**
			400V, 50 Hz			**KT5-UA-400V**
			415V, 50 Hz/ 480V, 60 Hz			**KT5-UA-480V**
			575V, 60 Hz			**KT5-UA-575V**
	Shunt Trip Release • Left-side mounted • Adds 18 mm to the width of the Manual Motor Starter		20-24 V, 50/60 Hz	1	KT5	**KT5-AA-24V**
			110V, 50/60 Hz			**KT5-AA-110V**
			200…240V, 50/60 Hz			**KT5-AA-240V**
			350…415V, 50/60 Hz			**KT5-AA-415V**

Bus Bars

Accessory	Description	Connection Diagram	Terminal Links	Pkg Qty	For Use With	Catalog Number
	Compact Bus Bars • UL: 600V, 60 A • IEC: 690V, 65 A	• 45 mm spacing • For use with front-mounted auxiliary contact	2 x 3 connections	10	KT5	**KT5-32-DB-45-2**
			3 x 3 connections			**KT5-32-DB-45-3**
			4 x 3 connections			**KT5-32-DB-45-4**
			5 x 3 connections			**KT5-32-DB-45-5**
		• 54 mm spacing • For use with side-mounted auxiliary contact	2 x 3 connections	10	KT5	**KT5-32-DB-54-2**
			3 x 3 connections			**KT5-32-DB-54-3**
			4 x 3 connections			**KT5-32-DB-54-4**
			5 x 3 connections			**KT5-32-DB-54-5**
		• 63 mm spacing • For use with side-mounted trip release	2 x 3 connections	10	KT5	**KT5-32-DB-63-2**
			3 x 3 connections			**KT5-32-DB-63-3**
			4 x 3 connections			**KT5-32-DB-63-4**
			5 x 3 connections			**KT5-32-DB-63-5**
	Bus Bar Feeder Terminal (Flat) • Supply of compact bus bars • Increases terminal capacity			10	KT5-32-DB	**KT5-32-A3N**
	Bus Bar Feeder Terminal (High) • Supply of compact bus bars • Increases terminal capacity			10		**KT5-32-A3NH**

Connecting Modules

Accessory	Description	Pkg Qty	For Use With	Catalog Number
	Connecting Module - 12 A • For DOL Starters • Starters mount on single DIN Rail (KT5 on DIN rail) • Electrical and mechanical interconnection of KT5 and CA8 Contactors	1	KT5 to CA8	**KT5-32-PEK12**
	Connecting Module - 25 A • For DOL Starters • Starters mount on single DIN Rail (KT5 on DIN rail) • Electrical and mechanical interconnection of KT5 and CA7 Contactors	1	KT5 to CA7-9...23	**KT5-32-PEC23**

Accessories for KT5

Accessory	Description	Color	Legend	For Use with	Pkg Qty	Catalog Number
	Blank Space Cover • For covering unused terminal links • Must be ordered in multiples of 10 (10pcs/pkg)	Gray/Black		KT5	50	**KT5-WSN**
	Screw Adapter • For screw arrangement of a motor protection circuit breaker • Hat (DIN) Rail 35 x 7.5 mm • 44 mm length	Red/Yellow		KT5	10	**KT5-N45**
	Enclosure • Up to three padlocks in OFF position • Protection Class: IP65; UL/CSA Type 12	Red/Yellow	0 - I OFF -ON Trip	KT5	1	**KT5-ENY65**
		Black Handle				**KT5-ENN65**
	Door Mounting Kit • Up to three padlocks in OFF position • Protection Class: IP65; UL/CSA Type 12	Red/Yellow	0 - I OFF -ON Trip	KT5	1	**KT5-DMY65**
		Black Handle				**KT5-DMN65**
	Door Coupling Handle • Up to three padlocks in OFF position • Defeatable	Red/Yellow	0 - I OFF -ON Trip	KT5	1	**KT5-HCRY**
		Black/Black	0 - I OFF - ON Trip		1	**KT5-HTC**
	Coupler • Coded - Positioning of ON indication dependent from mounting orientation of the KT5	Driver with screw		KT5	1	**KT5-DNC**
	• Uncoded - Positioning of ON indication independent from mounting orientation of the KT5	Driver without coding, with screw				**KT5-DNUC**
	Shaft Alignment Ring • Supports the long shafts for alignment to the handle inlet. It makes closing panel doors easier • Use for shafts			KT5	1	**KT5-SAR**
	Extension Shaft	105 mm (4.13 in.)		KT5	10	**KT5-HT**
		180 mm (7.1 in.)				**KT5-HTM**
	Extension Shaft Support • Supports the shaft in the extension of handle (KT5-HTC/KT5-HTRY) • Required for shaft lengths >130 mm (5.1 in.) • Snaps on the right side of the KT5 controller • Width 9 mm. • For use with screw-mounted or hat rail mounted devices.			KT5	1	**KT5-SHS**
	Lockable Handle Accessory • For locking KT5 devices in the OFF position			KT5	10	**KT5-KN**

Technical Information

Standards Compliance		IEC	IEC/EN 60947-2, IEC/EN 60947-4-1, IEC/EN 60947-1
		cULus	UL 60947-1, UL 60947-4-1
Certification		Global	RINA (Marine)
		Regional	CCC, KC, EAC, CE, IEC, cULus, CB Scheme
Rated Operating Voltage		IEC [V]	690
		UL, CSA [V]	600
Rated Impulse Withstand Voltage		Main Circuits	6kV
		Auxillary Circuits	6kV
Rated Frequency		[Hz]	50...60
Rated Operating Current		[A]	0.1...32 (15 ranges)
Number of Operations	Mechanical	[operations]	100,000 Cycles
	Electrical	[operations]	100,000 Cycles (0.1...16A); 50,000 Cycles (20...32A)
Ambient Temperature			
	Storage		-50...+80ºC (-58...+176ºF)
	Operating	Open-compensated	-25...+55ºC (-13...+131ºF) ❶
		Open	-25...+70ºC (-13...+158ºF) ❶
		Enclosed	0...+40ºC (32...104ºF)
Maximum Operating Altitude Permissable			2000m
Pollution Degree			3
Phase loss sensitivity			Yes
Disconnect Function per IEC/60947-2			Yes
Resistance to shock per IEC 60068-2-27			25g/11ms
Resistance to vibration per IEC 60068-2-6			5g/3...150Hz
Minimum distance to other units same type		Horizontal	0 mm (0 in.)
		Vertical	150 mm (5.9 in.)
Minimum Distance to Electrical Conductive Bus Bar		Horizontal, up to 400V	0mm (0 in.)
		Vertical, up to 690V	> 1.5mm (0.06 in.)
Degree of Protection		Housing	IP20
		Mwain Terminal	IP10
Utilization Category		IEC 60947-2 (Circuit breaker)	A
		IEC 60947-4-1 (Motor Starter)	AC-3
Power Loss in all three poles up to:		0.16...1.6A	5.1 W
		2.5...6.3A	5.4 W
		10...12A	7.2 W
		16...25A	8.4 W
		32A	9.3 W

Terminal Connections

Connection			**No. of Conductors**	**Devices Rated ≤ 16 A**	**Devices Rated 20…32 A**
Type of terminals					
Connection Screw				M3.5/Pozidriv No.2	M4/Pozidriv No.2
Wiring	Solid		1 or 2	1…4 mm²	1…2.5 mm²
					2.5…6 mm²
	Flexible with ferrule		1 or 2	0.75…2.5 mm²	0.75…6 mm²
	Flexible		1 or 2	0.75…2.5 mm² / No. 16…12 AWG	1.5…2.5 mm² / No.16…8 AWG
					2.5…6 mm² / No.16…8 AWG
	Stranded per UL/CSA		1 or 2	1…4 mm² / No. 16…12 AWG	1…2.5 mm² / No.16…8 AWG
					2.5…6 mm² / No.16…8 AWG
	Stripping length			9 mm (0.35 in.)	10 mm (0.39 in.)
Tightening torques				0.8…1.2 N•m / 7…10 lb•in	2 N•m / 18 lb•in

❶ With derating. See UL/CSA Listed Applications ratings table on page F120.7

UL/CSA Listed Application Ratings, Manual Motor Controller Only

Catalog Number	UL 60947-4-1 — Manual Motor Controller				
	Branch Circuit Protection Max. Size per NEC/CEC [A]	Max. Short Circuit Current [kA]			
		Motor Disconnect		Group Installation	
		480V	600V	480V	600V
KTA5-32A-0.16A	175	30	5	30	5
KTA5-32A-0.25A	175	30	5	30	5
KTA5-32A-0.4A	175	30	5	30	5
KTA5-32A-0.63A	175	30	5	30	5
KTA5-32A-1.0A	175	30	5	30	5
KTA5-32A-1.6A	175	30	5	30	5
KTA5-32A-2.5A	175	30	5	30	5
KTA5-32A-4.0A	175	18	5	18	5
KTA5-32A-6.3A	175	18	5	18	5
KTA5-32A-10A	175	18	5	18	5
KTA5-32A-12A	175	18	5	18	5
KTA5-32A-16A	175	18	5	18	5
KTA5-32A-20A	400	18	5	18	5
KTA5-32A-25A	400	18	5	18	5
KTA5-32A-32A	400	18	5	18	5

Application Ratings, KT5 to CA8 Miniature Contactors

Catalog Number	UL 60947-4-1 — Manual Motor Controller					
	Max. Fuse or Circuit Breaker Size per NEC [A]	For Use With Contactor Cat. No.	Max. Short Circuit Current [kA]			
			Motor Disconnect		Group Installation	
			480V	600V	480V	600V
KTA5-32A-0.16A	175	CA8-09	30	5	30	5
KTA5-32A-0.25A	175	CA8-09	30	5	30	5
KTA5-32A-0.4A	175	CA8-09	30	5	30	5
KTA5-32A-0.63A	175	CA8-09	30	5	30	5
KTA5-32A-1.0A	175	CA8-09	30	5	30	5
KTA5-32A-1.6A	175	CA8-09	30	5	30	5
KTA5-32A-2.5A	175	CA8-09	30	5	30	5
KTA5-32A-4.0A	175	CA8-09	18	5	18	5
KTA5-32A-6.3A	175	CA8-12	18	5	18	5
KTA5-32A-10A	175	CA8-12	18	5	18	5
KTA5-32A-12A	175	CA8-12	18	5	18	5
KTA5-32A-16A	175	CA8-12	18	~	18	~

Application Ratings, KT5 to CA7 Contactors

Catalog Number	UL 60947-4-1 — Manual Motor Controller					
	Max. Fuse or Circuit Breaker Size per NEC [A]	For Use With Contactor Cat. No.	Max. Short Circuit Current [kA]			
			Motor Disconnect		Group Installation	
			480V	600V	480V	600V
KTA5-32A-0.16A	175	CA7-9	30	5	30	5
KTA5-32A-0.25A	175	CA7-9	30	5	30	5
KTA5-32A-0.4A	175	CA7-9	30	5	30	5
KTA5-32A-0.63A	175	CA7-9	30	5	30	5
KTA5-32A-1.0A	175	CA7-9	30	5	30	5
KTA5-32A-1.6A	175	CA7-9	30	5	30	5
KTA5-32A-2.5A	175	CA7-9	30	5	30	5
KTA5-32A-4.0A	175	CA7-9	18	5	18	5
KTA5-32A-6.3A	175	CA7-9	18	5	18	5
KTA5-32A-10A	175	CA7-9	18	5	18	5
KTA5-32A-12A	175	CA7-12	18	5	18	5
KTA5-32A-16A	175	CA7-16	18	5	18	5
KTA5-32A-20A	400	CA7-23	18	5	18	5
KTA5-32A-25A	400	CA7-30	18	5	18	5
KTA5-32A-32A	400	CA7-30	18	5	18	5

Type 2 Coordination Ratings, KT5 to CA7 Contactors, Standard Motor Protection

Catalog Number	IEC 60947-4-1		UL 60947-4-1					
	400/415V		480V			600V		
	Max. Short Circuit Current [kA]	For Use With Contactor Cat. No.	Max. Fuse or Circuit Breaker Size per NEC [A]	Max. Short Circuit Current [kA]	For Use With Contactor Cat. No.	Max. Fuse or Circuit Breaker Size per NEC [A]	Max. Short Circuit Current [kA]	For Use With Contactor Cat. No.
KTA5-32A-0.16A	50	CA7-9	175	30	CA7-9	175	5	CA7-9
KTA5-32A-0.25A	50	CA7-9	175	30	CA7-9	175	5	CA7-9
KTA5-32A-0.4A	50	CA7-9	175	30	CA7-9	175	5	CA7-9
KTA5-32A-0.63A	50	CA7-9	175	30	CA7-9	175	5	CA7-9
KTA5-32A-1.0A	50	CA7-9	175	30	CA7-9	175	5	CA7-9
KTA5-32A-1.6A	50	CA7-9	175	30	CA7-9	175	5	CA7-9
KTA5-32A-2.5A	50	CA7-9	175	30	CA7-12	175	5	CA7-12
KTA5-32A-4.0A	50	CA7-9	175	18	CA7-23	175	5	CA7-23
KTA5-32A-6.3A	50	CA7-9	175	18	CA7-23	175	5	CA7-23
KTA5-32A-10A	50	CA7-9	175	18	CA7-30	175	5	CA7-30
KTA5-32A-12A	25	CA7-12	175	18	CA7-30	175	5	CA7-30
KTA5-32A-16A	16	CA7-23	175	18	CA7-30	175	5	CA7-30
KTA5-32A-20A	10	CA7-30	400	18	CA7-30	400	5	CA7-30
KTA5-32A-25A	10	CA7-30	400	18	CA7-30	400	5	CA7-30
KTA5-32A-32A	10	CA7-30	400	18	CA7-30	400	5	CA7-30

Auxiliary Contact, Signaling Contact, and Short-circuit Signaling Contact Specifications

Specifications of Accessories		KT5-PA... Side-mounted Auxiliary, Signaling, and Short-circuit Signaling Contacts	KT5-PE... Front-mounted Auxiliary Contacts
Standards Compliance	IEC	IEC/EN 60947–1, IEC/EN 60947-5-1	IEC/EN 60947–1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated Operating Voltage	[U_e]	690V AC/600V DC	250V AC / 250V DC
Rated Thermal Current	[I_{th}]	6 A	5 A
Rated Frequency	[Hz]	50...60	50...60
Rated Impulse withstand Voltage	[U_{imp}]	6 kV	6 kV
Rated insulation voltage	[U_i]	690 V AC	250 V AC
Pollution Degree		3	3
Ambient Temperature	Operation	-25…+60 °C (-13…+140 °F)	-25…+60 °C (-13…+140 °F)
	Storage	-50…+80 °C (-58…+176 °F)	-50…+80 °C (-58…+176 °F)
Resistance to shock per IEC 60068-2-27		25g / 11 ms	25g / 11 ms
Resistance to vibrations per IEC 60068-2-6		5g / 3…150 Hz	5g / 3…150 Hz
Rated operational current I_e AC-15 per IEC/EN 60947-5-1 for utilization category	24 V, 120 V	6 A	3 A
	240 V	4 A	1.5 A
	400 V	3 A	~
	440 V, 690 V	1 A	~
Rated operational current I_e DC-13 per IEC/EN 60947-5-1 for utilization category	24 V	2 A	1 A
	125 V	0.55 A	250 V 0.27 A
	250 V	0.27 A	0.11 A
	440 V, 600 V	0.15 A	~
Minimum switching capacity		17 V DC / 5 mA	17V DC / 5 mA
Short-circuit protective device (N.O, N.C)		10 A Type gG	10 A Type gG
Duty time		100 %	100 %
Mounting		Right side	Front
Number of operations	Mechanical	50,000 cycles	50,000 cycles
	Electrical		

Contact utilization characteristics according to UL/CSA

Rated operating voltage U_e per UL/CSA		600 V AC / 600 V DC	250V AC / 250V DC
Pilot duty		B600, Q600	B300, R300
AC thermal rated current		5A	5 A
AC maximum volt-ampere	making	3600	3600 VA
	breaking	360	360 VA
DC thermal rated current		2.5 A	2.5 A
DC maximum volt-ampere	making	69 VA	28 VA
	breaking		

Undervoltage Release Specifications

Attribute		Value
Standards compliance	IEC	IEC/EN 60947-1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated control supply voltage **Rated frequency**		See Catalog page F120.4
Operating voltage	Tripping	0.35…0.7 x U_s
	Coil	0.85…1.1 x U_s
Rated impulse withstand voltage	[U_{imp}]	6 kV
Rated insulation voltage	[U_i]	690V
Pollution degree		3
Ambient air temperature	Operation	-25…+60 °C (-13…+140 °F)
	Storage	-50…+80 °C (-58…+176 °F)
Resistance to shock per IEC 60068-2-27		25g / 11 ms
Resistance to vibrations per IEC 60068-2-6		5g / 3…150 Hz
Mounting		left side of Manual Motor Controller

Shunt Trip Specifications

Attribute		Value
Standards compliance	IEC	IEC/EN 60947–1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated control supply voltage **Rated frequency**		See Catalog page F120.4
Operating voltage	Tripping	0.7…1.1 x U_s
Rated impulse withstand voltage	[U_{imp}]	6 kV
Rated insulation voltage	[U_i]	690V
Pollution degree		3
Ambient air temperature	Operation	-25…+60 °C (-13…+140 °F)
	Storage	-50…+80 °C (-58…+176 °F)
Resistance to shock per IEC 60068-2-27		15g/11ms
Resistance to vibrations per IEC 60068-2-6		5g / 3…150 Hz
Mounting		left side of Manual Motor Controller

Terminal Connections

Connection			No. of Conductors	Side Mounted	Front Mounted
Wiring	Solid		1 or 2	1…1.5 mm²	1…2.5 mm²
	Flexible with ferrule		1 or 2	0.75…1.5 mm²	
	Flexible		1 or 2	0.75…1.5 mm²	
	Stranded per UL/CSA		1 or 2	No. 16…14 AWG	
	Stripping length			8 mm (0.31 in.)	
Tightening torques				0.8…1.2 N•m / 7lb•in	
Recommended screwdriver				Pozidriv No.2	

IEC Performance Data

Feeder Terminal and Bus Bar Current Ratings

Attribute		KT5-32-DB-45…,-54…, -63…	KT5-32-A3N…
Rated operational voltage	U_e	690 V	
	U_e per UL/CSA	600V AC	
Rated operational current	I_e	65 A	
	U_e per UL/CSA	60 A	65 A
Suitable for enclosure size	(UL)	200% of Size of KT5 with bus bars	
Rated frequency		50/60 Hz	
Rated impulse withstand voltage	U_{imp}	6 kV	
Rated insulation voltage	U_i	690V AC	

Main Circuit Connecting Characteristics

Connection			No. of Conductors	Value
Wiring	Solid		1	6…25 mm²
	Flexible with ferrule		1	6…16 mm²
	Flexible with insulated ferrule		1	6…16 mm²
	Flexible		1	6…16 mm²
	Stranded per UL/CSA		1	No. 10…4 AWG
	Stripping length			10 mm (0.39 in.)
Tightening torques				2.5 N•m / 22 lb•in
Recommended screwdriver				Pozidriv No.2

Weights

Description	Catalog Number	Weight
Motor Controllers	KTA5-32A-0.16A	246 g
	KTA5-32A-0.25A	
	KTA5-32A-0.4A	
	KTA5-32A-0.63A	
	KTA5-32A-1.0A	
	KTA5-32A-1.6A	280 g
	KTA5-32A-2.5A	
	KTA5-32A-4.0A	
	KTA5-32A-6.3A	
	KTA5-32A-10A	
	KTA5-32A-12A	
	KTA5-32A-16A	
	KTA5-32A-20A	330 g
	KTA5-32A-25A	
	KTA5-32A-32A	
Auxiliary contacts - internal mount	KT5-PE1-11	20 g
	KT5-PE1-10	16 g
	KT5-PE1-01	16 g
	KT5-PE1-20	20 g
Auxiliary contacts - side mount	KT5-PA1-11	80 g
	KT5-PA1-20	
	KT5-PA1-02	
	KT5-PA1-20L	
Trip contacts - side mount	KT5-PAF1-S11	80 g
	KT5-PAF1-S20	
	KT5-PAF1-S02	41 g

Description	Catalog Number	Weight
Undervoltage Trip	KT5-AA-24V	110 g
	KT5-AA-110V	
	KT5-AA-240V	
	KT5-AA-415V	
Shunt Trip	KT5-UA-24V	100 g
	KT5-UA-28V	
	KT5-UA-48V	
	KT5-UA-60V	
	KT5-UA-120V	
	KT5-UA-208V	
	KT5-UA-240V	
	KT5-UA-400V	
	KT5-UA-480V	
	KT5-UA-575V	
Bus Bar connections	KT5-32-DB-45-2	37 g
	KT5-32-DB-45-3	58 g
	KT5-32-DB-45-4	81 g
	KT5-32-DB-45-5	103 g
	KT5-32-DB-54-2	39 g
	KT5-32-DB-54-3	60 g
	KT5-32-DB-54-4	90 g
	KT5-32-DB-54-5	113 g
	KT5-32-DB-63-2	43 g
	KT5-32-DB-63-3	70 g
	KT5-32-DB-63-4	94 g
	KT5-32-DB-63-5	123 g
	KT5-32-A3N	41 g
	KT5-32-A3NH	51 g

Description	Catalog Number	Weight
Blank space cover	KT5-WSN	4 g
Screw adapter	KT5-N45	2 g
Lockable handle	KT5-KN	6 g
Enclosure	KT5-ENY65	428 g
	KT5-ENN65	435 g
Door mounting kit	KT5-DMY65	258 g
	KT5-DMN65	268 g
Door coupling handle	KT5-HCRY	78 g
	KT5-HTC	80 g
Extension shaft	KT5-HT	28 g
	KT5-HTM	50 g
Coupler	KT5-DNC	17 g
	KT5-DNUC	4 g
Shaft alignment ring	KT5-SAR	22 g
Extension shaft support	KT5-SHS	50 g
Connecting module	KT5-32-PEC23	23 g
	KT5-32-PEK12	

KT5 Wiring Example

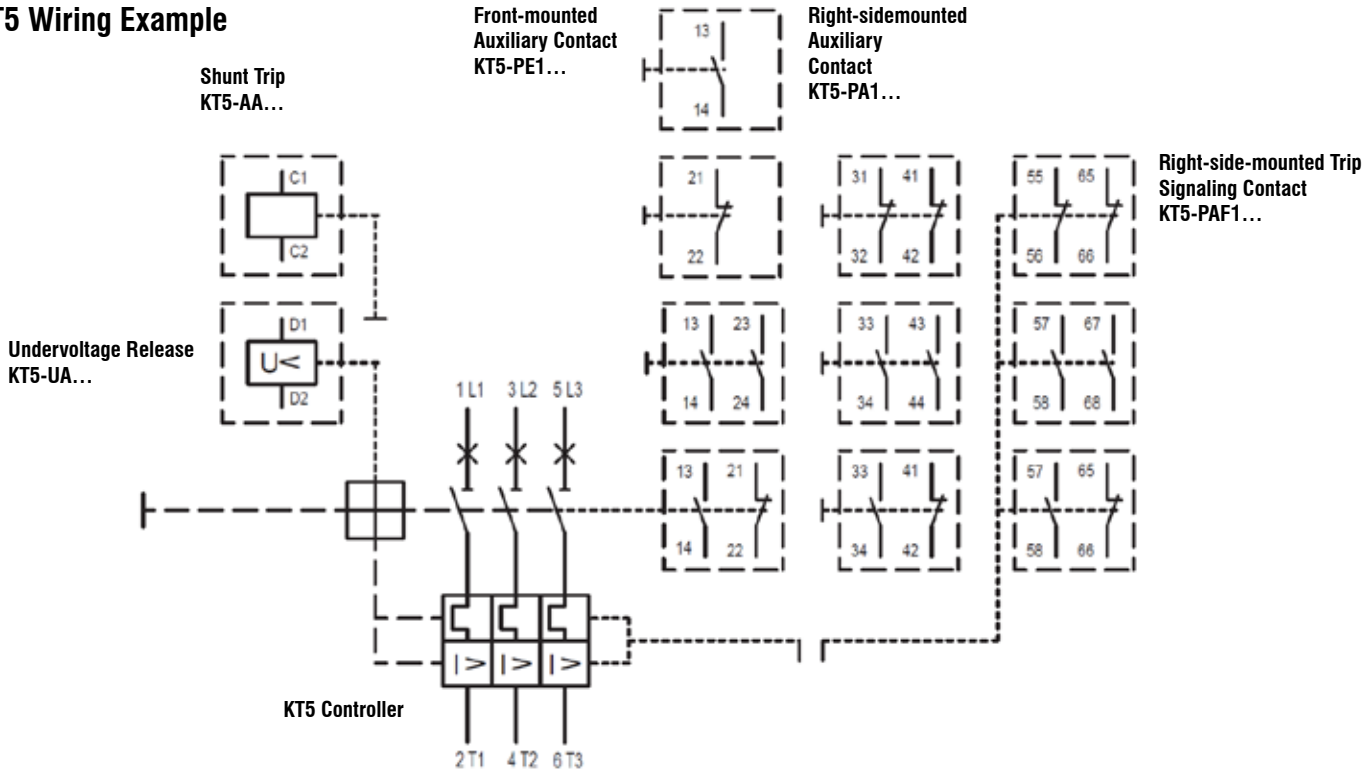

KT5 Mounting Position

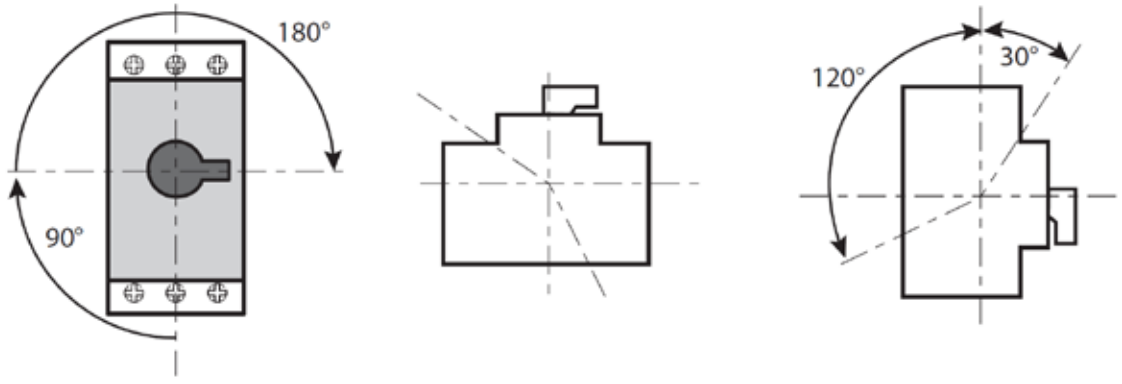

❶ No backup fuse required.

KTA5-32A-0.16A...16A Manual Motor Controller

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

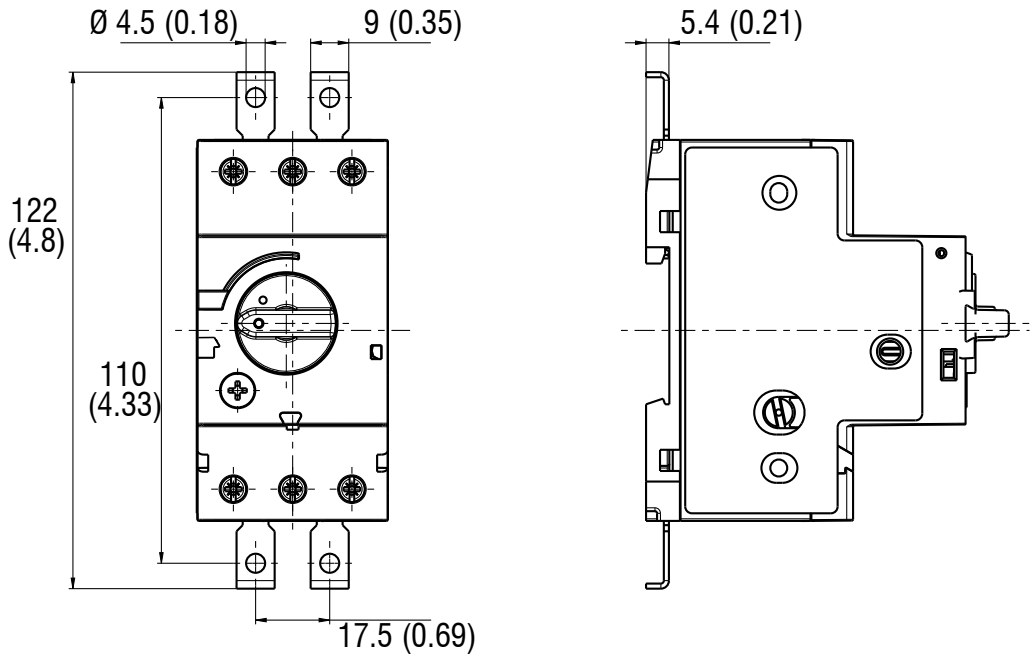

KTA5-32A-0.16A...16A Manual Motor Controller *(with Accessories)*

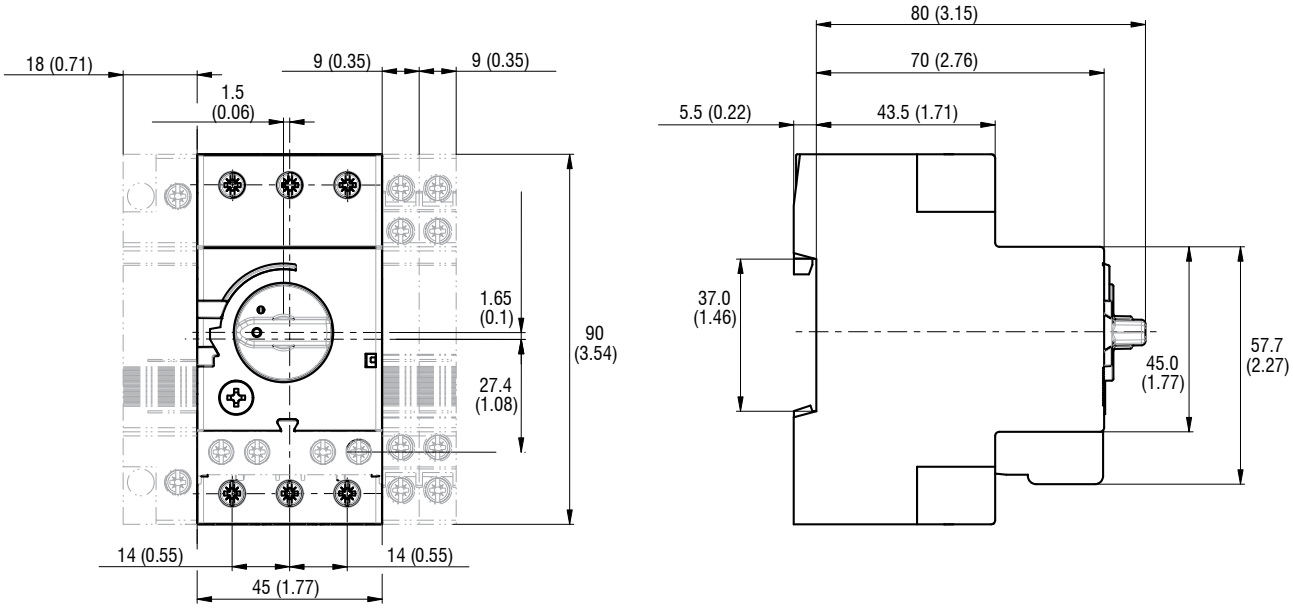

KTA5-32A-20A…32A Manual Motor Controller

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

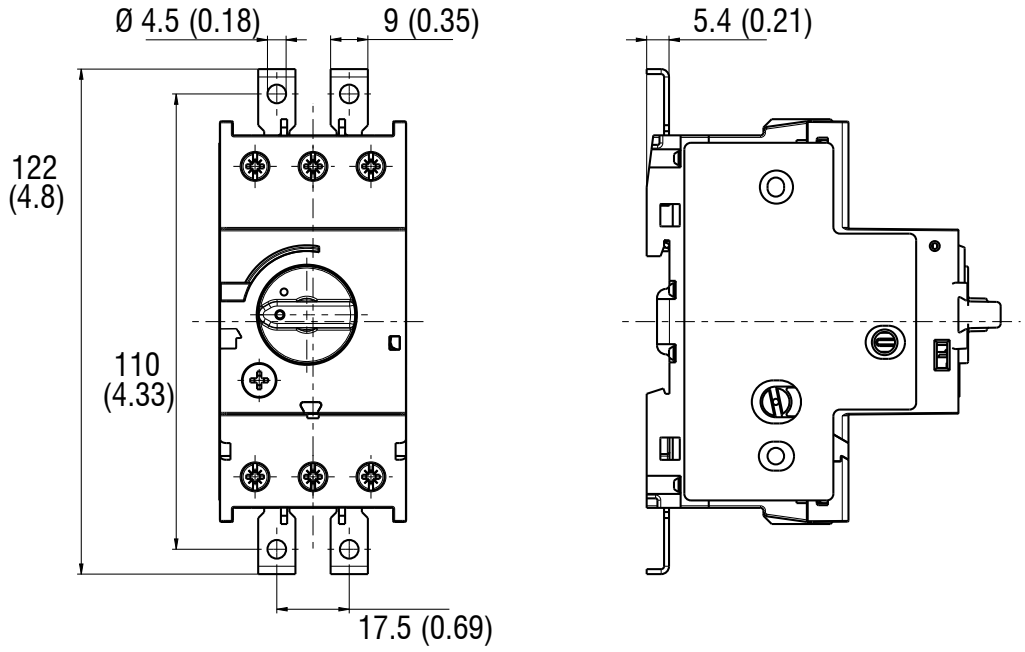

KTA5-32A-20A…32A Manual Motor Controller *(with Accessories)*

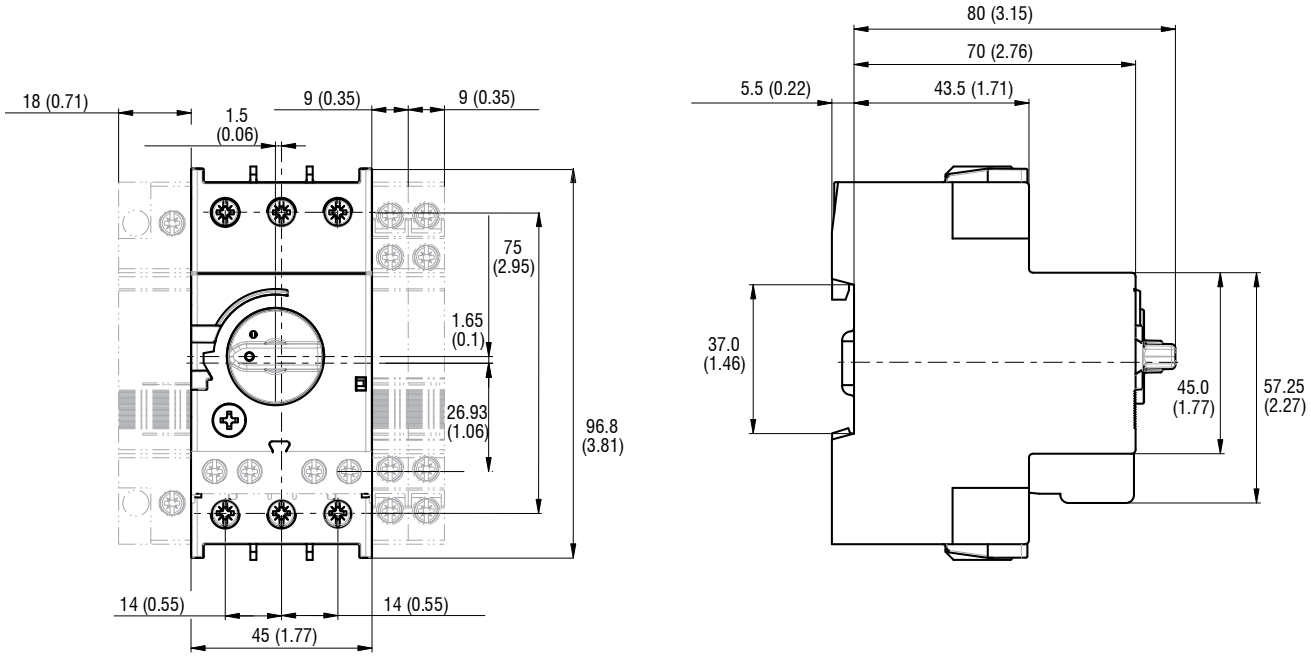

Notes

Series KT7 Motor Circuit Controllers

DISCONTINUED

Versatile, convenient and space saving… for a variety of applications

Sprecher+Schuh's KT7 series of Motor Circuit Controllers are some of the most versatile and technologically advanced control products available today.

In one small package, KT7s combine the functions of:

- Current limiting short circuit protection
- Class 10 thermal overload protection
- Switching and
- Signaling

These devices can be used in a wide variety of control schemes that reduce panel space, simplify installation and eliminate the need for more expensive equipment.

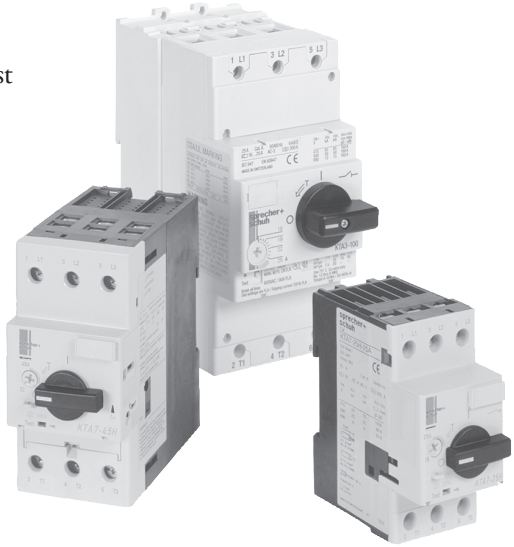

Increased ratings…

Sprecher+Schuh's KT7 controller family offers higher interrupting capacities (KAIC ratings) and improved Type 2 Coordination and Type E (life after short-circuit). The KTA7-25H/32H offers the option of higher short-circuit current ratings (SCCR) than the standard interrupting capacity of the KTA7-25S/32S Motor Controllers. KTA7 is also available in frames up to 45A. KTC7 can be used with High Efficiency motors. KTB7 Magnetic Only controllers can be combined with CA7 contactors and CEP7 overloads to provide additional features. KTV7 series motor controllers are suitable for application at the output of variable frequency drive (VFD) in multi-motor installations.

Designed for multiple applications

UL rules allow KT7 Motor Circuit Controllers to be used in a wide variety of applications including:

- Manual Starter Applications
- Traditional Group Motor Applications with compliance to the Tap Conductor Ratings
- Motor Disconnect Applications
- Self-Protected Manual Combination Starter Applications (Type E)
- Individual Combination Starter Applications (Type E/F)
- Multi-motor Starter Combination Applications (Type E/F)

See our online white paper

Methods of Applying KT7 Motor Circuit Controllers

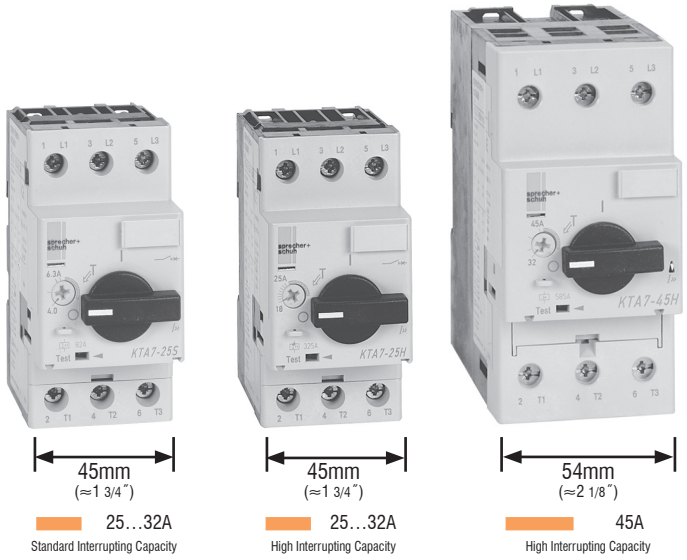

Updated 03-31-22

Construction Type E Listing

DISCONTINUED

Advanced current limiting and breaking capacity has allowed KT7s to be UL / CSA listed as self-protected (Construction Type E) manual combination motor controllers. This eliminates the need for an upstream fuse or circuit breaker when using the KT7 as a manual motor starter. In addition, KT7s *also* meet UL requirements for "at-motor disconnects," which means they can be used in an enclosure with a lockable handle as a manual motor starter for individual circuits, and are also an approved means of motor disconnect.

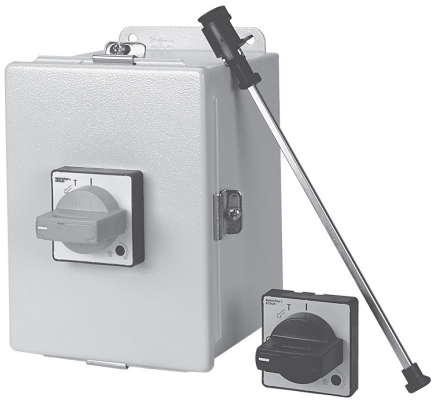

KT7s meet UL requirements for Type E manual motor controllers and "at-motor disconnects"

Type E + Combo starter + Economy = "Ecombo" starter

When the KT7 self-protected manual combination starter is combined with Sprecher + Schuh's CA7 contactor to provide remote operation, we now have an alternative to the classic combination starter. We call these "Ecombo" starters, which save significant dollars and panel space over conventional combo starters. Ecombo starters are available for applications up to 45 Amperes (30 HP @ 460V).

See a complete explanation of Ecombo starters beginning on page F58 of this catalog.

Multi-motor applications… Popular and money saving

Because of the KT7's Construction Type E – UL Rating as a self-protected combination starter, many group motor installations can utilize an even simpler design and less expensive equipment. The result is minimum panel size and maximum flexibility while avoiding cumbersome NEC group motor installation rules.

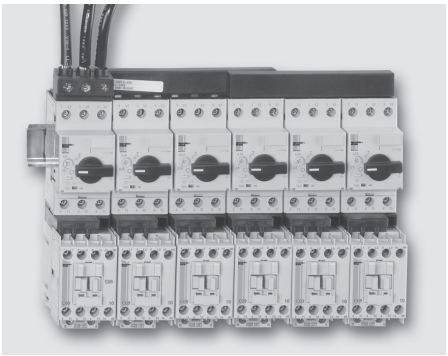

Using KT7s in Multi-Motor Starter applications can replace classic Branch Circuit Protection Devices and reduce panel space up to 60%

Excellent short circuit protection characteristics

In the event of a short-circuit, the contacts are opened by magnetic, non-adjusting tripping elements in times approaching 2/1000 of a second. This results in the extremely rapid buildup of an arc voltage which limits the current of the short-circuit to a very low level. Because of this superb current limiting capability, KTA Motor Circuit Controllers have a short circuit capacity of up to 65kA at 480Y/277V and up to 47kA at 600Y/347V (see illustration below).

Manual Motor Starter Ratings

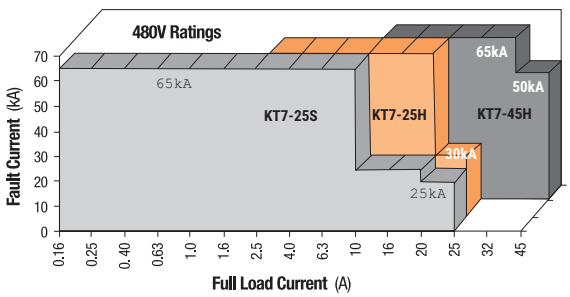

Superb thermal overload protection

Every KT7 device is individually calibrated at the factory for the smallest and largest current it can handle. When coupled with automatic ambient temperature compensation over a range of -25°C to +60°C, very accurate thermal overload protection is obtained. In addition, the KT7 is a Class 10 device… it trips within 10 seconds under locked rotor conditions (6 x FLA). This better protects today's T-Frame motors.

Special units for special applications

KTC7 controllers are available with a fixed magnetic trip set at 16…20x the maximum value of the current adjustment range (as opposed to 13x for the KTA7). This prevents nuisance tripping in applications utilizing high efficiency motors for example. The KTB7 Magnetic Only model is available *without* the thermal trip feature for special applications where a separate motor overload is required.

Other protection features

All KT7 Motor Circuit Controllers provide accelerated tripping under single phase conditions. This is accomplished with a special "differential tripping" mechanism built into each device.

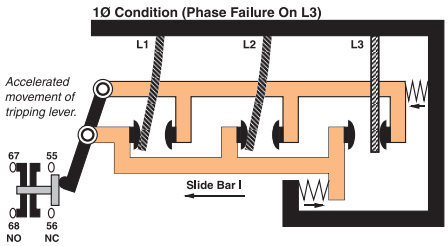

All KT7 Motor Circuit Controllers offer accelerated tripping under single phase conditions

Updated 03-31-22

KTA7 Base Unit

Maximum Horsepower						Current Adjustment Range [A]	Magnetic Release Response Current [A]	Catalog Number
Typical Single Phase		Typical Three Phase [HP]						
115V	230V	200V	230V	460V	575V			
KTA7-25…32S — Standard Interrupting Capacity								
~	~	~	~	~	~	0.10...0.16	2.1	**KTA7-25S-0.16A**
~	~	~	~	~	~	0.16...0.25	3.3	**KTA7-25S-0.25A**
~	~	~	~	~	1/4	0.25...0.40	5.2	**KTA7-25S-0.4A**
~	~	~	~	1/4	1/3	0.40...0.63	8.2	**KTA7-25S-0.63A**
~	~	~	~	1/2	3/4	0.63...1.0	13	**KTA7-25S-1A**
~	1/10	1/4	1/3	1	1	1.0...1.6	21	**KTA7-25S-1.6A**
1/10	1/6	1/2	3/4	1-1/2	2	1.6...2.5	33	**KTA7-25S-2.5A**
1/8	1/3	1	1	3	3	2.5...4	52	**KTA7-25S-4A**
1/4	3/4	1-1/2	2	5	5	4...6.3	82	**KTA7-25S-6.3A**
1/2	1-1/2	3	3	7-1/2	10	6.3...10	130	**KTA7-25S-10A**
1	3	5	5	10	15	10...16	208	**KTA7-25S-16A**
1-1/2	3	5	7-1/2	15	20	14.5...20	260	**KTA7-25S-20A**
2	3	7-1/2	7-1/2	20	20	18...25	325	**KTA7-25S-25A**
2	5	7-1/2	10	20	25	24...29	406	**KTA7-32S-29A**
3	5	7-1/2	10	25	30	27...32	448	**KTA7-32S-32A**
KTA7-25…32H — High Interrupting Capacity								
1/10	1/6	1/2	3/4	1-1/2	2	1.6...2.5	33	**KTA7-25H-2.5A**
1/8	1/3	1	1	3	3	2.5...4	52	**KTA7-25H-4A**
1/4	1/2	1-1/2	2	5	5	4...6.3	82	**KTA7-25H-6.3A**
1/2	1-1/2	3	3	7-1/2	10	6.3...10	130	**KTA7-25H-10A**
1	3	5	5	10	15	10...16	208	**KTA7-25H-16A**
1-1/2	3	5	7-1/2	15	20	14.5...20	260	**KTA7-25H-20A**
2	3	7-1/2	7-1/2	20	20	18...25	325	**KTA7-25H-25A**
2	5	7-1/2	10	20	25	24...29	406	**KTA7-32H-29A**
3	5	7-1/2	10	25	30	27...32	448	**KTA7-32H-32A**
KTA7-45H — High Interrupting Capacity								
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3...10	130	**KTA7-45H-10A**
1	3	5	5	10	10	10...16	208	**KTA7-45H-16A**
1-1/2	3	5	7-1/2	15	15	14.5...20	260	**KTA7-45H-20A**
2	3	7-1/2	10	20	20	18...25	325	**KTA7-45H-25A**
3	5	7-1/2	10	25	30	23...32	416	**KTA7-45H-32A**
3	7-1/2	10	15	30	40	32...45	585	**KTA7-45H-45A**

Catalog Number KTA7-25S

Catalog Number KTA7-25H

Catalog Number KTA7-45H

Horsepower ratings shown in the table are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Updated 03-31-22

KTA7 UL Ratings Application Chart

Device	Manual Motor Starter		Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷❺		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹❺	
	Max. Short Circuit Current [kA]		Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
	480V	600V		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTA7-25…32S — Standard Interrupting Capacity											
KTA7-25S-0.16A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-0.25A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-0.4A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-0.63A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-1A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-1.6A	65	47	450	65	47	65	47	65	47	65	47
KTA7-25S-2.5A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25S-4A	65	25	450	65	25	65	25	65	25	65	25
KTA7-25S-6.3A	65	30	450	65	30	65	30	65	~	65	~
KTA7-25S-10A	65	30	450	65	30	65	30	65	~	65	~
KTA7-25S-16A	30	30	450	30	30	30	30	30	~	30	~
KTA7-25S-20A	30	30	450	30	30	10	10	10	~	10	~
KTA7-25S-25A	25	10	450	25	10	10	5	~	~	~	~
KTA7-32S-29A	25	30	450	25	30	10	~	~	~	~	~
KTA7-32S-32A	25	30	450	25	30	10	~	~	~	~	~
KTA7-25…32H — High Interrupting Capacity											
KTA7-25H-2.5A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-4A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-6.3A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-10A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-16A	65	30	450	65	30	65	30	65	30	65	30
KTA7-25H-20A	65	30	450	65	30	65	30	65	~	65	~
KTA7-25H-25A	30	30	450	30	30	30	30	30	~	30	~
KTA7-32H-29A	30	30	450	30	30	30	18	~	~	~	~
KTA7-32H-32A	30	30	450	30	30	30	18	~	~	~	~
KTA7-45H — High Interrupting Capacity											
KTA7-45H-10A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-16A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-20A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-25A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-32A	65	30	600	65	30	65	30	65	30	65	30
KTA7-45H-45A	65	18	600	65	18	65	18	65	~	65	~

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

It should be noted that the KT7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTC7 Base Unit ❶

Maximum Horsepower						Current Adjustment Range [A]	Magnetic Release Response Current [A]	Catalog Number
Typical Single Phase		Typical Three Phase [HP]						
115V	230V	200V	230V	460V	575V			
KTC7-25S — Standard Interrupting Capacity								
~	~	~	~	~	~	0.10...0.16	3.2	**KTC7-25S-0.16A**
~	~	~	~	~	~	0.16...0.25	5.2	**KTC7-25S-0.25A**
~	~	~	~	~	1/4	0.25...0.40	8.2	**KTC7-25S-0.4A**
~	~	~	~	1/4	1/3	0.40...0.63	13	**KTC7-25S-0.63A**
~	~	~	~	1/2	3/4	0.63...1.0	21	**KTC7-25S-1A**
~	1/10	1/4	1/3	1	1	1.0...1.6	33	**KTC7-25S-1.6A**
1/10	1/6	1/2	3/4	1-1/2	2	1.6...2.5	52	**KTC7-25S-2.5**
1/8	1/3	1	1	3	3	2.5...4	82	**KTC7-25S-4A**
1/4	3/4	1-1/2	2	5	5	4...6.3	130	**KTC7-25S-6.3A**
1/2	1-1/2	3	3	7-1/2	10	6.3...10	208	**KTC7-25S-10A**
1	3	5	5	10	15	10...16	260	**KTC7-25S-16A**
KTC7-25H — High Interrupting Capacity								
1	3	5	5	10	10	10...16	260	**KTC7-25H-16A**
1-1/2	3	5	7-1/2	15	20	14.5...20	325	**KTC7-25H-20A**
KTC7-45H — High Interrupting Capacity								
2	3	7-1/2	10	20	25	18...25	416	**KTC7-45H-25A**
3	5	7-1/2	10	25	30	23...32	585	**KTC7-45H-32A**

Horsepower ratings shown in the table are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTC7-25S-4A.

KTC7-25S

Description

The KTC7 has a fixed magnetic trip set at 16…21x the maximum value of the current adjustment range (as opposed to the KTA7s magnetic trip of approximately 13x current adjustment range). KTC7 are typically used in applications where nuisance tripping might occur, as with some high efficiency motors.

❶ Magnetic trip is fixed at 16…21x the maximum value of the current adjustment range.

KTC7 UL Ratings Application Chart

Device	Manual Motor Starter		Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷❺		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹❺	
	Max. Short Circuit Current [kA]		Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
	480V	600V		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTC7-25S — Standard Interrupting Capacity											
KTC7-25S-0.16A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-0.25A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-0.4A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-0.63A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-1A	65	47	450	65	47	65	47	65	47	65	47
KTC7-25S-1.6A	65	47	450	65	47	65	47	65	30	65	30
KTC7-25S-2.5A	65	25	450	65	25	65	25	65	25	65	25
KTC7-25S-4A	65	30	450	65	30	65	30	65	~	65	~
KTC7-25S-6.3A	65	30	450	65	30	65	30	65	~	65	~
KTC7-25S-10A	30	30	450	30	30	30	30	30	~	30	~
KTC7-25S-16A	30	30	450	30	30	10	10	10	~	10	~
KTC7-25H — High Interrupting Capacity											
KTC7-25H-16A	65	30	450	65	30	65	30	65	30	65	30
KTC7-25H-20A	30	30	450	30	30	30	30	30	~	30	~
KTC7-45H — High Interrupting Capacity											
KTC7-45H-25A	65	30	600	65	30	65	30	65	30	65	30
KTC7-45H-32A	65	30	600	65	18	65	18	65	18	65	18

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

It should be noted that the KT7 Manual Motor Circuit Controller, when listed as a self-protected (Type E) device, is rated for Wye-connected power systems for voltages above 240 volts (i.e. 480Y/277 volts common in the United States or 600Y/347 volts common in Canada).

KTB7 Base Unit ❷

Maximum Horsepower						❶ Rated Operational Current [A]	Magnetic Release Response Current [A]	Catalog Number
Typical Single Phase		Typical Three Phase [HP]						
115V	230V	200V	230V	460V	575V			
KTB7-25S — Standard Interrupting Capacity								
~	~	~	~	~	1/4	0.40	5.2	**KTB7-25S-0.4A**
~	~	~	~	1/2	3/4	1.0	13	**KTB7-25S-1A**
1/10	1/6	1/2	3/4	1-1/2	2	2.5	33	**KTB7-25S-2.5A**
KTB7-25…32H — High Interrupting Capacity								
1/10	1/6	1/2	3/4	1-1/2	2	2.5	33	**KTB7-25H-2.5A**
1/8	1/3	1	1	3	3	4	52	**KTB7-25H-4A**
1/2	1-1/2	3	3	7-1/2	10	10	130	**KTB7-25H-10A**
1	3	5	5	10	15	16	208	**KTB7-25H-16A**
2	3	7-1/2	7-1/2	20	20	25	325	**KTB7-25H-25A**
3	5	7-1/2	10	25	30	32	448	**KTB7-32H-32A**
KTB7-45H — High Interrupting Capacity								
2	3	7-1/2	10	20	25	25	325	**KTB7-45H-25A**
3	5	7-1/2	10	25	30	32	416	**KTB7-45H-32A**
3	7-1/2	10	15	30	40	45	585	**KTB7-45H-45A**

KTB7-25S

Description

The KTB7 is designed without a thermal trip element (i.e., current adjustment range). It should be selected for applications where a separate motor overload protection device is used, such as on CLT7 Three Component Starters on page F76. Magnetic trip is the same as the KTA7 (approximately 13x operational current).

❶ APPLICATION NOTE: Product Selection for Heavy Duty Starting Applications using KTB7-25S, KTB7-25H/32H and KTB7-45H Motor Circuit Controllers

The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.

In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.

Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.00 CLASS 15 = 1.22 CLASS 20 = 1.42
CLASS 25 = 1.58 CLASS 30 = 1.73
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.

Application Example:
Motor 480 VAC, 10 HP, Ie 14 FLA
Heavy duty starting application with start time of up to 18 seconds

Solution:
Starting time up to 18 seconds requires dimensioning for CLASS 20.
- Selection of the Motor Circuit Controller for Short Circuit Protection: Multiply the rated operational current I_e with factor for CLASS 20: $I_e(20)$ = 14 A x 1.42 = 19.9 A
- Select corresponding Sprecher + Schuh KTB7-25S, KTB7-25H/32H or KTB7-45H from catalog using next higher current rating: KTB7-25H-25A

❷ Horsepower ratings shown in the table are for reference only. The final selection of the controller depends on the actual motor full load current and service factor.
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – (4.2A x 0.9 = 3.78A). Select Catalog Number KTB7-25S-4A.

KTB7 UL Ratings Application Chart

Device	Manual Motor Starter		Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷	
	Max. Short Circuit Current [kA]		Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
	480V	600V		480V	600V	480V	600V
KTA7-25S — Standard Interrupting Capacity							
KTB7-25S-0.4A	65	47	450	65	47	65	47
KTB7-25S-1A	65	47	450	65	47	65	47
KTB7-25S-2.5A	65	30	450	65	30	65	30
KTA7-25…32H — High Interrupting Capacity							
KTB7-25H-2.5A	65	30	450	65	30	65	30
KTB7-25H-4A	65	30	450	65	30	65	30
KTB7-25H-10A	65	30	450	65	30	65	30
KTB7-25H-16A	65	30	450	65	30	65	30
KTB7-25H-25A	30	30	450	30	30	30	30
KTB7-32H-32A	30	30	450	30	30	30	18
KTA7-45H — High Interrupting Capacity							
KTB7-45H-25A	65	30	600	65	30	65	30
KTB7-45H-32A	65	30	600	65	30	65	30
KTB7-45H-45A	65	18	600	65	18	65	18

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.

KTV7 Base Unit

Rated Operational Current (I_e)	Current Adjustment Range [A]	Nominal Magnetic Trip Current	Maximum Short Circuit Current [kA]		Maximum Horsepower Typical ❶❷ Three Phase [HP]				Catalog Number
[A]	[A]	[A]	480Y/277V Type E	480V (group motor)	200V	230V	460V	575V	
KTV7-25H…32H — High Interrupting Capacity									
1.6	1.0…1.6	82	65	65	1/4	1/3	1	~	**KTV7-25H-1.6A**
2.5	1.6...2.5	82	65	65	1/2	3/4	1-1/2	~	**KTV7-25H-2.5A**
4.0	2.5...4.0	82	65	65	1	1	3	~	**KTV7-25H-4A**
6.3	4.0...6.3	82	65	65	1-1/2	2	5	~	**KTV7-25H-6.3A**
10	6.3...10	130	65	65	3	3	7-1/2	~	**KTV7-25H-10A**
16	10...16	208	65	65	5	5	10	~	**KTV7-25H-16A**
20	14.5...20	260	65	65	5	7-1/2	15	~	**KTV7-25H-20A**
25	18...25	325	30	30	7-1/2	7-1/2	20	~	**KTV7-25H-25A**
29	24...29	406	~	30	7-1/2	10	20	~	**KTV7-32H-29A**
32	27...32	448	~	30	7-1/2	10	25	~	**KTV7-32H-32A**

KTV7-25H

Horsepower ratings shown in the table are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTV7-25H-4A.

Description

The Sprecher+Schuh KTV7 series motor controllers are suitable for two types of applications under cULus listings:

(1) as a Manual, Self-protected Motor Controller or

(2) as a Manual Motor Controller with approval for group installation (and as a motor disconnect)

When UL/CSA listed as a manual, self-protected combination motor controller, the KTV7 provides all of the necessary NEC requirements for protection and control of individual motor branch circuits without additional protective devices (per NEC 430-52C option 6).

When KTV7 devices are applied a manual motor controllers in group installations, then NEC group installation rules state these devices must be applied per the appropriate rules, which require the use of an upstream BCPD-branch circuit protection device (per NEC 430-53C option 2).

The output frequency of the VFD must be limited to 400Hz or less to prevent thermal degradation. Various models of the KTV7 series self-protected combination motor controllers provide disconnection for motor branch circuits, branch-circuit and short-circuit protection (including magnetic protection), overload/thermal protection and manual switching.

The KTV7 self-protected combination motor controllers are current limiting and have a fixed magnetic trip. Interrupt ratings at 400V and 480V are available up to 65KaIC. The VFD output pulse-width modulation frequency must be limited to 4 kilohertz or less. The circuit breakers provide motor overload protection with a trip class 10 characteristic.

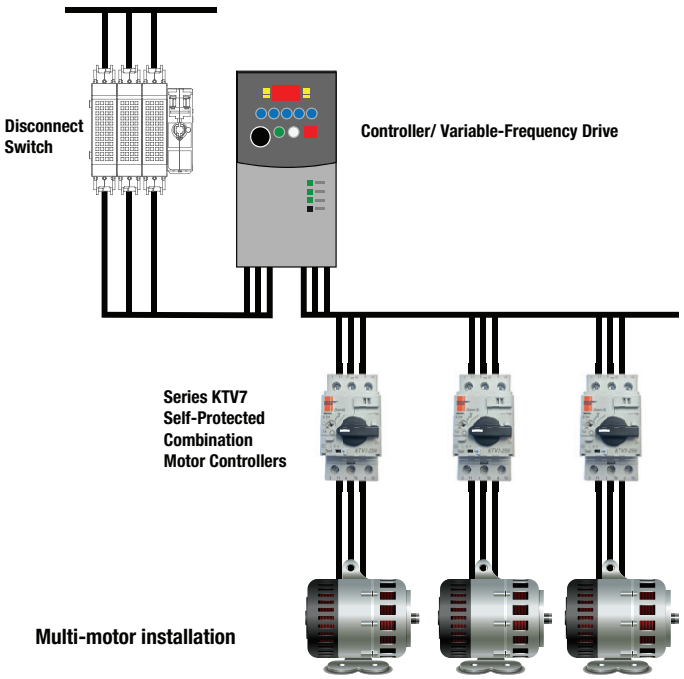

❶ HP ratings shown are for reference. Final selection of MPCB is determined by actual motor full load current.
❷ Not applicable at 575V.

Updated 03-31-22

DISCONTINUED

KTV7 UL Ratings Application Chart

Device	Manual Controller for Group Installation ❶			Manual Controller as Motor Disconnect ❷❺		Suitable for Tap Conductor Protection		Self-Protected Type E Manual Combination Controller ❸❹❺	
	Max. Fuse or Circuit Breaker	Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]		Max. Short Circuit Current [kA]	
		480V	600V	480V	600V	480Y/277V	600Y/347V	480Y/277V	600Y/347V
KTV7-25H…32H — High Interrupting Capacity									
KTV7-25H-1.6A	450	65	~	65	~	65	~	65	~
KTV7-25H-2.5A	450	65	~	65	~	65	~	65	~
KTV7-25H-4A	450	65	~	65	~	65	~	65	~
KTV7-25H-6.3A	450	65	~	65	~	65	~	65	~
KTV7-25H-10A	450	65	~	65	~	65	~	65	~
KTV7-25H-16A	450	65	~	65	~	65	~	65	~
KTV7-25H-20A	450	65	~	65	~	65	~	65	~
KTV7-25H-25A	450	30	~	30	~	30	~	30	~
KTV7-32H-29A	450	30	~	30	~	~	~	~	~
KTV7-32H-32A	450	30	~	30	~	~	~	~	~

❶ UL 508, CSA 22.2 No. 14 for group installation, in connection with short-circuit protection device.
❷ UL 508 Part III.
❸ UL 508 Part IV.
❹ Type E applications require use of the KT7-xx-TE terminal adaptor on KT7s. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.
❺ Requires lockable twist knob (KT7-KN1 or KT7-KRY1 page F16) or lockable door coupling handle (KT7-HTN or KT7-HTRY page F15).

Accessories for KT7

Accessory	Description	Operator Position ❶ OFF	Operator Position ❶ ON	Operator Position ❶ Tripped	Type	Connection Diagram and Terminal Markings ❷	For Use With	Catalog Number
	Front-Mounted Auxiliary Contact • 1-pole or 2-pole • No additional space required • 300V max.	O	X	O	1 NO		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-10**
		X	O	X	1 NC		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-01**
		O	X	O	1 NO		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸ KF7	**KT7-PE1-11**
		X	O	X	1 NC			
		O	X	O	1 NO		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-20**
		O	X	O	1 NO			
		X	O	X	1 NC		KTA7/KTB7/ KTC7/KTV7 KTU7 ❸	**KT7-PE1-02**
		X	O	X	1 NC			
	Right Side-Mounted Auxiliary Contact • 2-pole • Adds 9 mm to the width of the device • 600V max.	O	X	O	1 NO		KTA7 KTB7 KTC7 KTV7	**KT7-PA1-20**
		O	X	O	1 NO			
		X	O	X	1 NC		KTA7 KTB7 KTC7 KTV7	**KT7-PA1-02**
		X	O	X	1 NC			
		O	X	O	1 NO		KTA7 KTB7 KTC7 KTV7	**KT7-PA1-11**
		X	O	X	1 NC			

❶ X=Contact Closed
O=Contact Open

❷



❸ When KT7-PE_ is used with KTU7 Circuit Breakers, KT7-PEFC Load Terminal Cover is required to comply with UL489 terminal clearance standards.

Accessories for KT7

Accessory	Description	Operator Position ❶ OFF	Operator Position ❶ ON	Operator Position ❶ Tripped	Type	Connection Diagram and Terminal Markings ❷	For Use With	Catalog Number
	Front-Mounted Trip Contact • 2-pole • Indicates tripping of device • No additional space required • 300V max.	0	X	0	1 NO		KTA7/ KTB7/ KTC7/ KTV7 KTU7 ❸	**KT7-PEF1-S10-N10**
		0	0	X	NO Trip (Short-Circuit & Overload)			
		X	0	X	1 NC		KTA7/ KTB7/ KTC7/ KTV7 KTU7 ❸	**KT7-PEF1-S10-N01**
		0	0	X	NO Trip (Short-Circuit & Overload)			
	Right Side-Mounted Trip Contact • 2-pole • Indicates tripping of motor protector • Adds 9 mm to the width of the device • 600V max.	0	0	X	NO Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S10-M10**
		0	0	X	NO Trip (Short-Circuit)			
		0	0	X	NO Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S10-M01**
		X	X	0	NC Trip (Short-Circuit)			
		X	X	0	NC Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S01/M10**
		0	0	X	NO Trip (Short-Circuit)			
		X	X	0	NC Trip (Short-Circuit & Overload)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-S01-M01**
		X	X	0	NC Trip (Short-Circuit)			
		0	0	X	NO Trip (Short-Circuit)		KTA7 KTB7 KTC7 KTV7	**KT7-PAF1-M11**
		X	X	0	NC Trip (Short-Circuit)			

❶ X=Contact Closed
O=Contact Open

❷



❸ When KT7-PE_ is used with KTU7 Circuit Breakers, KT7-PEFC Load Terminal Cover is required to comply with UL489 terminal clearance standards.

Accessories for KT7

Accessory	Description	For Use With	AC Coil Voltage		Catalog Number	
			50 HZ	60 HZ	Shunt Trip	Undervoltage
	Undervoltage Trip • Left-side mounted • Adds 18 mm to the width of the KT7 device • Automatically trips motor protector when voltage falls below 35…70%	KTA7 KTB7 KTC7 KTV7	12V	14V	**KT7-AA-14V**	**KT7-UA-14V**
			21V	24V	**KT7-AA-24V**	**KT7-UA-24V**
			24V	28V	**KT7-AA-28V**	**KT7-UA-28V**
			42V	48V	**KT7-AA-48V**	**KT7-UA-48V**
			110V	**120V**	**KT7-AA-120V**	**KT7-UA-120V**
			110V	127V	**KT7-AA-127V**	**KT7-UA-127V**
			220...230V		**KT7-AA-230V**	**KT7-UA-230V**
				240...260V	**KT7-AA-240V**	**KT7-UA-240V**
			240V	277V	**KT7-AA-277V**	**KT7-UA-277V**
			380V	460V	**KT7-AA-460V**	**KT7-UA-460V**
			415V	**480V**	**KT7-AA-480V**	**KT7-UA-480V**
			525V	600V	**KT7-AA-600V**	**KT7-UA-600V**
	Shunt Trip • Left-side mounted • Adds 18 mm to the width of the KT7 device • Trips motor protector when voltage is applied remotely	KTU7	**DC Coil Voltage**		**Shunt Trip**	**Undervoltage**
			9V DC		**KT7-AA-9D**	**KT7-UA-9D**
			12V DC		**KT7-AA-12D**	**KT7-UA-12D**
			24V DC		**KT7-AA-24D**	**KT7-UA-24D**
			36V DC		**KT7-AA-36D**	**KT7-UA-36D**
			48V DC		**KT7-AA-48D**	**KT7-UA-48D**
			60V DC		**KT7-AA-60D**	**KT7-UA-60D**
			64V DC		**KT7-AA-64D**	**KT7-UA-64D**
			72V DC		**KT7-AA-72D**	**KT7-UA-72D**
			80V DC		**KT7-AA-80D**	**KT7-UA-80D**

Undervoltage Trip Connection Diagram



Shunt Trip Connection Diagram



❶ For Overload (thermal) Trip of KT7.
❷ For Short-Circuit (magnetic) Trip of KT7.

Updated 03-31-22

DISCONTINUED

Classic Handle Assembly, Type 1/4/4X/12

Accessory	Description	Color	Legend ❷	For use with...	Frame Size (Length)	Catalog Number
	Classic Door Coupling Handle ❶❷❸ • For 3 padlocks 4...8 mm (5/16") diameter • Type 1/3/3R/4/4X/12 and IP66 • Interlock override capability • Can be modified for locking in ON position • Ships with coupling — order extension shaft and legend plate separately • See Technical Section for mounting depth information	Gray/Black	O - I OFF -ON Trip	KTA7, KTB7, KTC7, KTV7 ❶❷ KTU7 ❸	65 x 65mm	**KT7-HTN**
		Red/Yellow	O - I OFF -ON Trip		65 x 65mm	**KT7-HTRY**
	Extension Shaft ❶ • Cut to required length for mounting depth (adapter-door) • See Technical Section for mounting depth information			KT7-HTN KT7-HTRY	250 mm	**KT7-HT**
					400 mm	**KT7-HTL**

Contemporary Handle Assembly, Type 3R/3/4/4X

Accessory	Description	Color	Legend ❷	For use with...	Frame Size (Length)	Catalog Number
	Contemporary Door Coupling Handle ❺ • Screw Fixing • Type 3R, 3, 12, 4, 4X, IP66 • Field configurable for defeatable or non-defeatable • Ships with coupling — order extension shaft and legend plate separately • Requires 30mm hole for mounting • For up to 2 padlocks	Black/Black	O - I OFF -ON Trip	KTA7 KTB7 KTC7 KTV7 KTU7	48.7 x 47mm	**KT7-SB**
		Red/Yellow	O - I OFF - ON Trip		48.7 x 47mm	**KT7-SY**
	Extension Shaft • Cut to required length for mounting depth (adapter-door) • See Technical Section for mounting depth information			KT7-SB KT7-SY	305mm (12")	**KT7-S1**
					533mm (21")	**KT7-S2**

Handle Accessories

Accessory	Description	For use with...	Catalog Number
	**Extension Shaft Support ❹** • Provides consistent alignment of the KT7 shafts with handle or door coupling • Recommended for shaft lengths >200mm (7.8 in) • 9mm in width and snaps on right side of KT_7 devices • Allows for one side-mount auxiliary	KT7-HT_ KT7-S_ KT7-N_	**KT7-SHS**
	Legend Plate • Marking: "Haupschalter" and "Main Switch" (Black/Gray) • Marking: "Not-Aus" and "Emergency Off" (Black/Yellow)	KT7-HT_ KT7-S_	**KT7-HTFCN** **KT7-HTFCRY**

❶ See Dimensions and Technical data in this section for design compatibility.
❷ KTA7, KTB7 and KTC7 can be used with Series D or later KT7-H_ Handle mechanism with "I-O" markings or Series E with "ON-OFF" markings.
❸ KTU7 requires Series E or later to comply with UL489 "ON-OFF" Trip markings.
❹ See page F41 for assembly example and dimensions.
❺ See page F42 for KT7-S_ handle dimensions.

Accessories for KT_7

Accessory	Description	Color	For Use With	Catalog Number
 KT7-KRY1 KT7-DS	**Lockable Twist Knob** • For 1 padlock 4...5 mm (1/4") dia. shackle • Can be locked in OFF position	Black	KTA7, KTB7, KTC7, KTV7 KTU7	**KT7-KN1**
		Red/Yellow		**KT7-KRY1**
	Locking Tag • Padlock attachment to the lockable handles • Up to three padlocks 4...8 mm (5/16") shackle	Red	KT7-KN1 KT7-KRY1 KT7-45-KRY	**KT7-DS**
	Terminal Adapter for Type E Applications ❶ • Required on all KT7s used in UL Type E applications • May not be used with Bus Bars		KTA/B/C7/V7-25/32	**KT7-25-TE1**
			KTA/B/C7-45	**KT7-45-TE**
	Anti-Tamper Shield • Provides protection against inadvertent adjustment of the current setting • 10 pieces per package		KTA7 KTB7 KTC7 KTV7	**KT7-25-CA**
	**Screw Adaptor** • For screw fixing of KT7 Motor Circuit Controller • 10 pieces per package		KTA7 KTB7 KTC7 KTV7 KTU7	**KT7-45-AS**

Marking Systems

Component	Description	Pkg. Qty.	Catalog Number
	Label Sheet - 1 sheet with 105 self-adhesive paper labels each, 6 x17mm	1	**CA7-FMS**
	**Marking Tag Sheet -** 1 sheet with 160 perforated paper labels each, 6 x 17mm. To be used with transparent cover	1	**CA7-FMP**
	Transparent Cover - To be used with Marking Tag Sheets	100 ❷	**CA7-FMC**
	Tag Carrier - For marking with marker cards and tags. See page N6 for complete listing of available cards and tabs.	100 ❷	**CA7-FMA2**

❶ Terminal Adaptors are supplied as standard on enclosed KT7 and CX7 starters, as well as, CL8, CL7 and CK7 assembled products, assuring they can be used in Type E applications. Alternatively, compact busbar supply block KT7-_-A2E or -A3E meet Type E requirements for terminal spacing.

❷ Minimum quantity is one package of 100.

DISCONTINUED

Connecting Modules *(for connecting KTA7, KTB7 or KTC7 to CA8, CA7 AC coil, or CA7 Electronic DC coil contactors)* ❷

Module	Description	For Connecting. . .	To Contactor. . .	Catalog Number ❶
	**Connecting Modules (forms Ecombo Starter) - ❶** • Provides electrical and mechanical interconnection of KT7 and CA8 (with AC or DC coils), CA7 (with AC coils) or CA7-_E (with Electronic DC coils). • Suitable for reversing and wye-delta kits • Ecombo starter (with KT7-25/32) mounts on a single DIN-rail (KT7 mounts on DIN-rail) • Ecombo starter (with KT7-45) can be mounted on two DIN-rails or on Mounting Modules (see selection table below) • Contactor coil mounted on load side	KT_7-25S..32S or KF7	CA8-9...12 12A max.	**KT7-25S-PEK12**
		KT_7-25S..32S or KF7	CA7-9...23 CA7-9E...23E	**KT7-25S-PEC23**
		KT_7-25H..32H	CA7-9...23 CA7-9E...23E	**KT7-25H-PEC23**
		KT_7-25H..32H	CA7-30...37 CA7-30E...37E	**KT7-25H-PNC37**
		KT_7-45H	CA7-30...37 CA7-30E...37E	**KT7-45H-PNC37**
		KT_7-45H	CA7-43 CA7-43E	**KT7-45H-PNC43**

Connecting Modules *(for connecting KTA7, KTB7 or KTC7 to CA7 to make CLT7 type assemblies)* ❷

Module	Description	For Connecting…	To Contactor. . .	Use Connector. . . ❶	With Coil Module. . .
 KT7-25S-PNC23 KT7-25S-PSC23	**Connecting Modules** • Provides electrical interconnection of KT7 and CA7 contactors • Contactor Coil Module extends A1/A2 Line Side terminals forward to facilitate wiring • Contactor and motor protector must be mounted on two DIN-rails or on Mounting Module (see selection table below)	KT_7-25S..32S or KF7	CA7-9..23	**KT7-25S-PNC23**	**KT7-25S-PSC23**
		KT_7-25H..32H		**KT7-25H-PNC23**	
		KT_7-25H..32H	CA7-30..37	**KT7-25H-PNC37**	**KT7-45H-PSC43**
		KT_7-45H		**KT7-45H-PNC37**	
		KT_7-45H	CA7-43	**KT7-45H-PNC43**	

Type W Mounting Modules

Module	Description	Width (mm)	Catalog Number
	**Short Mounting Module -** Requires Connecting Module from tables above • Provides support for KT7 + CA7 or CA8 • Top rail is specifically designed for KT7 • Bottom rail is movable for easy assembly and disassembly • Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts • 228 mm long	45	**W-32489**
		54	**W-32490**
	Long Mounting Module - See Section D for Connecting Modules • Provides support for KT7 + PCS Softstarter, CA7 + PCS Softstarter or KTB7 + CA7+CEP7 • Top rail is specifically designed for KT7 • Bottom rail is movable for easy assembly and disassembly • Complete unit mounts to two 35mm DIN-rails or one 70mm DIN-rail or screw mounts • 283 mm long	45	**W-32496**
		54	**W-32497**
	Spacer for Mounting Module - Fits between 45mm and 54mm for Reversing applications (228 mm long)	9	**W-32955**
	Dovetail Joints - Used to connect two mounting modules together. (Sold in packages of 50)		**W-32954**

❶ cURus Approved (File # E33916).
❷ Not for use with KTU7 Circuit Breakers

Updated 04-05-22

DISCONTINUED

Compact Busbar System for KTA7, KTB7 and KTC7 Motor Controlers ❶❷❹

Accessory	Description	For Use With	Catalog Number
	Compact Busbar — 45 mm Spacing (Rated 64 A) • For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers	KT_7-25…32S KT_7-25…32H ❸	**KT7-32-DB-45-2** **KT7-32-DB-45-3** **KT7-32-DB-45-4** **KT7-32-DB-45-5**
	**Compact Busbar — 54 mm Spacing (Rated 64 A)** • For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers Connects 5 Motor Controllers	KT_7-25…32S KT_7-25…32H ❸	**KT7-32-DB-54-2** **KT7-32-DB-54-3** **KT7-32-DB-54-4** **KT7-32-DB-54-5**
	Compact Busbar — 54mm Spacing (Rated 120 A) • For use with front-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers	KT_7-45H	**KT7-45-DB-54-2** **KT7-45-DB-54-3** **KT7-45-DB-54-4**
	**Compact Busbar — 63 mm Spacing (Rated 120 A)** • For use with side-mounted auxiliary contact on KT_7 Motor Controllers Connects 2 Motor Controllers Connects 3 Motor Controllers Connects 4 Motor Controllers	KT_7-45H	**KT7-45-DB-63-2** **KT7-45-DB-63-3** **KT7-45-DB-63-4**
 KTA7-25S to 25H KBH2	**Spacer for KT_7-25…32H to KT_7-25…32S** • Accommodates difference in depth from KT_7-25H…32H to KT_7-25S…32S • Aligns terminals for compact bus bar connection	KT_7-25…32S to KT_7-25…32H ❸	**KBH2**
 A2E A3E	**Supply Block and Terminal** • For power connection to Compact Busbar — 600V, KT_7-25/32…63A max. / KT_7-45…120A maximum • Top feed — overlaps commoning link • Meets requirements for terminal spacing from source in Type E applications • KT7-25-A2E and KT7-45-A2E are primarily used for bottom cable feed	KT_7-25…32S or KT_7-25…32H ❸	**KT7-25-A2E** **KT7-32-A3E**
		KT_7-45H	**KT7-45-A2E** **KT7-45-A3E**
	**Terminal Cover** • For covering of unused connection terminals • IP2X finger protection	KT_7-25...32 KT_7-45H	**KT7-32-DBA** **KT7-45-DBA**

❶ UL Approved (File #E33916); CSA Approved (File #13908).
❷ Compact busbar may not be applied with KT7-25-TE1 or KT7-45-TE Terminal Adaptors. Either Terminal Adaptors or Bus Bar may be used, not both.
❸ KT7-25…32S and KT7-25…32H may not be combined without KBH2.
❹ Not for use with KTU7 Circuit Breakers

Updated 03-31-22

KF7 Fuse Holder to be used with KT7 or CA8/CA7 ❺

Accessory	Description	Approvals		Catalog Number
		IEC/CE	UL/CSA	
	KF7 Fuse Holder, CC - 30A	Yes	Yes	**KF7-D3C-C30**
Blown Fuse Indicator	KF7 Fuse Holder with Blown Fuse Indication, CC - 30A	Yes	Yes	**KF7-D3C-C30L**



Lockable in Open Position

KF7 is Compatible with KT7 Compact Busbar ❹



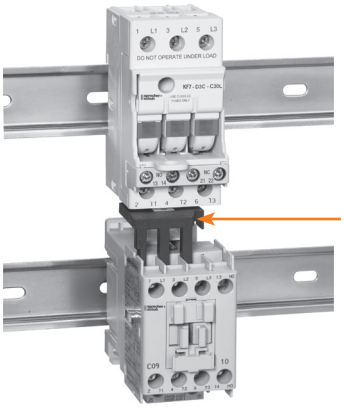

Connector to Contactor ❶ ❷ ❸

Applying KF7 with KTA7 Motor Circuit Controllers and CA7 Contactors

KF7 can be applied on the line side of a multiple small KTA7 motor circuit controller or a single KTA7 controller and CA7 contactors to increase the short-circuit protection of the group or a single branch circuit. KF7 is compatible with the KT7 compact bus bars (as shown in Section F), which reduces the space requirement as well as installation time.

Applying KF7 with CA7 Contactors

KF7 can be applied on the line side of CA7 contactors to increase the short-circuit withstand rating. The cUL withstand rating of CA7 when protected by Type “CC” fuses is increased to 100KAIC as shown on page A72.

Accessory	Connection Diagram	Description	Catalog Number
		**Auxiliary Contact for KF7 Fuse Holder (1 NO Late Make + NC Early Break)** • NO Late Make, provides positive indication that power circuit is open • NC Early Break, provides capability for dropping out contactor before breaking current on fuse	**KF7-PE1-11**

❶ The KF7 terminal spacing and height are the same as KT_7-25S. Reference page F17 tables to select a connector.
❷ If using a KT7-25S-PEK12 (with CA8) or KT7-25S-PEC23 (with CA7), close couple connector, then the pair mounts on a single DIN rail under the KF7.
❸ Using a KT7-25S-PNC23 to mount a KF7 with a standard CA7 with AC Coil requires two DIN rails.
The A1-A2 terminals of a standard CA7 with AC Coil can be turned to the load side. In this case a KT7-25S-PSC23 would not be required.
❹ KF7 can not be mounted directly to a KT_7 using a PEK, PEC or PNC Connector. KF7, used in connection with a Compact Bus Bar, can provide Group Fusing protection for multiple bus bar connected KT_7.
❺ For dimensions and wiring diagrams see page F44.

IEC Performance Data

		Catalog Number KTA7-25S...32S														
		0.16A	**0.25A**	**0.4A**	**0.63A**	**1A**	**1.6A**	**2.5A**	**4A**	**6.3A**	**10A**	**16A**	**20A**	**25A**	**29A**	**32A**
Rated Operational Current, I_e	[A]	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6.3	10	16	20	25	29	32
Magnetic Release Current	[A]	2.1	3.3	5.2	8.2	13	21	33	52	82	130	208	260	325	406	448
Switching of Standard Three-Phase Motors																
AC-2, AC-3																
230/240V	[kW]	~	~	0.06	0.09	0.18	0.25	0.37	0.75	1.5	2.2	4.0	5.5	5.5	7.5	7.5
400/415V	[kW]	0.02	0.04	0.09	0.18	0.25	0.55	0.75	1.5	2.2	4.0	7.5	10	11	13	15
500V	[kW]	0.06	0.09	0.12	0.18	0.37	0.75	1.1	2.2	3.0	6.3	10	11	15	18.5	20
690V	[kW]	0.06	0.09	0.18	0.25	0.55	1.1	1.8	3.0	4.0	7.5	13	17	22	25	25
Back-up Fuses																
gG, gL, only if $I_{cc} \geq I_{cu}$																
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	100	100	125	125
400/415V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	80	100	100	125	125
440/460V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	63	63	80	80	100	100
500V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	80	80	80	80	100	100
690V	[A]	❶	❶	❶	❶	❶	16	20	35	50	50	63	63	63	80	80
Ultimate Short-Circuit Breaking Capacity I_{cu}																
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	65	65	50	50
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	65	50	15	15	15
440/460V	[kA]	100	100	100	100	100	100	100	100	100	50	10	6	6	6	6
500V	[kA]	100	100	100	100	100	100	100	100	100	50	10	6	6	6	6
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3	3	3	3	3
Rated Service Short-Circuit Breaking Capacity I_{cs}																
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	50	50	25	25
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	50	15	15	15	15
440/460V	[kA]	100	100	100	100	100	100	100	100	100	50	6	6	6	6	6
500V	[kA]	100	100	100	100	100	100	100	100	100	50	6	6	6	6	6
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3	3	3	3	3

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTA7-25H...32H									Catalog Number KTA7-45H...					
		2.5A	**4A**	**6.3A**	**10A**	**16A**	**20A**	**25A**	**29A**	**32A**	**10A**	**16A**	**20A**	**25A**	**32A**	**45A**
Rated Operational Current, I_e	[A]	2.5	4	6.3	10	16	20	25	29	32	10	16	20	25	32	45
Magnetic Release Current	[A]	33	52	82	130	208	260	325	406	448	130	208	260	325	416	585
Switching of Standard Three-Phase Motors																
AC-2, AC-3																
230/240V	[kW]	0.37	0.75	1.5	2.2	4.0	5.5	5.5	7.5	7.5	2.2	4.0	5.5	6.3	7.5	13
400/415V	[kW]	0.75	1.5	2.2	4.0	7.5	10	11	13	15	4.0	7.5	10	11	15	22
500V	[kW]	1.1	2.2	3.0	6.3	10	11	15	18.5	20	6.3	10	11	15	20	30
690V	[kW]	1.8	3.0	4.0	7.5	13	17	22	25	25	7.5	13	17	22	30	40
Back-up Fuses																
gG, gL, only if $I_{cc} \geq I_{cu}$																
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	100	100	125	125	80	100	100	100	125	125
440/460V	[A]	❶	❶	❶	❶	80	100	100	125	125	80	100	100	100	125	125
500V	[A]	❶	❶	❶	❶	80	80	80	100	100	80	100	100	100	125	125
690V	[A]	20	35	50	50	63	63	63	80	80	63	80	80	80	100	100
Ultimate Short-Circuit Breaking Capacity I_{cu}																
230/240V	[kA]	100	100	100	100	100	100	100	65	65	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	65	50	50	100	100	100	100	65	65
440/460V	[kA]	100	100	100	50	50	50	50	25	25	65	65	65	65	65	50
500V	[kA]	100	100	100	50	50	50	50	25	25	50	50	50	50	50	50
690V	[kA]	10	10	6	6	6	6	6	6	6	10	10	10	10	10	10
Rated Service Short-Circuit Breaking Capacity I_{cs}																
230/240V	[kA]	100	100	100	100	100	100	100	50	50	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	50	25	25	25	25	50	50	50	50	50	50
440/460V	[kA]	100	100	100	50	50	25	25	20	20	50	50	50	50	50	50
500V	[kA]	100	100	100	50	50	25	25	20	20	50	50	50	50	50	50
690V	[kA]	10	10	6	6	4	4	4	4	4	10	10	10	10	6	6

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTB7-25S...						
		0.16A	**0.25A**	**0.4A**	**0.63A**	**1A**	**1.6A**	**2.5A**
Rated Operational Current, I_e	[A]	0.16	0.25	0.4	0.63	1	1.6	2.5
Magnetic Release Current	[A]	2.1	3.3	5.2	8.2	13	21	32
Switching of Standard Three-Phase Motors								
AC-2, AC-3								
230/240V	[kW]	~	~	0.06	0.09	0.18	0.25	0.37
400/415V	[kW]	0.02	0.04	0.09	0.18	0.25	0.55	0.75
500V	[kW]	0.06	0.09	0.12	0.18	0.37	0.75	1.1
690V	[kW]	0.06	0.09	0.18	0.25	0.55	1.1	1.8
Back-up Fuses								
gG, gL, only if $I_{cc} \geq I_{cu}$								
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	❶	❶
440/460V	[A]	❶	❶	❶	❶	❶	❶	❶
500V	[A]	❶	❶	❶	❶	❶	❶	❶
690V	[A]	❶	❶	❶	❶	❶	16	20
Ultimate Short-Circuit Breaking Capacity I_{cu}								
230/240V	[kA]	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100
440/460V	[kA]	100	100	100	100	100	100	100
500V	[kA]	100	100	100	100	100	100	100
690V	[kA]	100	100	100	100	100	10	6
Rated Service Short-Circuit Breaking Capacity I_{cs}								
230/240V	[kA]	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100
440/460V	[kA]	100	100	100	100	100	100	100
500V	[kA]	100	100	100	100	100	100	100
690V	[kA]	100	100	100	100	100	8	6

❶ No backup fuse required.

Updated 03-31-22

IEC Performance Data

		Catalog Number KTB7-25H...32H							Catalog No. KTB7-45H...		
		2.5A	**4A**	**6.3A**	**10A**	**16A**	**25A**	**32A**	**25A**	**32A**	**45A**
Rated Operational Current, I_e	[A]	2.5	4	6.3	10	16	25	32	25	32	45
Magnetic Release Current	[A]	32	52	82	130	208	325	448	325	416	585
Switching of Standard Three-Phase Motors											
AC-2, AC-3											
230/240V	[kW]	0.37	0.75	1.5	2.2	4.0	5.5	7.5	6.3	7.5	13
400/415V	[kW]	0.75	1.5	2.2	4.0	7.5	11	15	11	15	22
500V	[kW]	1.1	2.2	3.0	6.3	10	15	20	15	20	30
690V	[kW]	1.8	3.0	4.0	7.5	13	22	25	22	25	40
Back-up Fuses											
gG, gL, only if $I_{cc} \geq I_{cu}$											
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	100	125	125
400/415V	[A]	❶	❶	❶	❶	❶	100	125	100	125	125
440/460V	[A]	❶	❶	❶	❶	80	100	125	100	125	125
500V	[A]	❶	❶	❶	❶	80	80	100	100	125	125
690V	[A]	20	35	50	50	63	63	80	80	100	100
Ultimate Short-Circuit Breaking Capacity I_{cu}											
230/240V	[kA]	100	100	100	100	100	100	65	100	100	100
400/415V	[kA]	100	100	100	100	100	65	50	100	65	65
440/460V	[kA]	100	100	100	50	50	50	25	65	65	50
500V	[kA]	100	100	100	50	50	25	25	50	50	50
690V	[kA]	10	6	10	6	6	6	6	10	10	10
Rated Service Short-Circuit Breaking Capacity I_{cs}											
230/240V	[kA]	100	100	100	100	100	100	50	100	100	100
400/415V	[kA]	100	100	100	100	50	25	25	50	50	50
440/460V	[kA]	100	100	100	50	50	25	20	50	50	50
500V	[kA]	100	100	100	50	50	25	20	50	50	50
690V	[kA]	10	6	10	6	4	4	4	10	6	6

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTC7-25S...										
		0.16A	**0.25A**	**0.4A**	**0.63A**	**1A**	**1.6A**	**2.5A**	**4A**	**6.3A**	**10A**	**16A**
Rated Operational Current, I_e	[A]	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6.3	10	16
Magnetic Release Current	[A]	3.2	5.2	8.2	13	21	32	52	82	130	208	260
Switching of Standard Three-Phase Motors												
AC-2, AC-3												
230/240V	[kW]	~	~	0.06	0.09	0.18	0.25	0.37	0.75	1.5	2.2	4.0
400/415V	[kW]	0.02	0.04	0.09	0.18	0.25	0.55	0.75	1.5	2.2	4.0	7.5
500V	[kW]	0.06	0.09	0.12	0.18	0.37	0.75	1.1	2.2	3.0	6.3	10
690V	[kW]	0.06	0.09	0.18	0.25	0.55	1.1	1.8	3.0	4.0	7.5	13
Back-up Fuses												
gG, gL, only if $I_{cc} \geq I_{cu}$												
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶	80
440/460V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	63	80
500V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	80	80
690V	[A]	❶	❶	❶	❶	❶	16	20	35	50	50	63
Ultimate Short-Circuit Breaking Capacity I_{cu}												
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	50
440/460V	[kA]	100	100	100	100	100	100	100	100	100	10	10
500V	[kA]	100	100	100	100	100	100	100	100	100	10	10
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3
Rated Service Short-Circuit Breaking Capacity I_{cs}												
230/240V	[kA]	100	100	100	100	100	100	100	100	100	100	100
400/415V	[kA]	100	100	100	100	100	100	100	100	100	100	15
440/460V	[kA]	100	100	100	100	100	100	100	100	100	10	6
500V	[kA]	100	100	100	100	100	100	100	100	100	10	6
690V	[kA]	100	100	100	100	100	8	6	6	4	4	3

❶ No backup fuse required.

Updated 03-31-22

IEC Performance Data

		Catalog No. KTC7-25H...		Catalog No. KTC7-45H...	
		16A	**20A**	**25A**	**32A**
Rated Operational Current, I_e	[A]	16	20	25	32
Magnetic Release Current	[A]	260	325	416	585
Switching of Standard Three-Phase Motors					
AC-2, AC-3					
230/240V	[kW]	4.0	5.5	6.3	7.5
400/415V	[kW]	7.5	10	11	15
500V	[kW]	10	11	15	20
690V	[kW]	13	17	22	30
Back-up Fuses					
gG, gL, only if $I_{cc} \geq I_{cu}$					
230/240V	[A]	❶	❶	❶	❶
400/415V	[A]	80	100	100	125
440/460V	[A]	80	100	100	125
500V	[A]	80	80	100	125
690V	[A]	63	63	80	100
Ultimate Short-Circuit Breaking Capacity I_{cu}					
230/240V	[kA]	100	100	100	100
400/415V	[kA]	100	65	65	65
440/460V	[kA]	50	25	65	65
500V	[kA]	50	25	50	50
690V	[kA]	6	6	10	10
Rated Service Short-Circuit Breaking Capacity I_{cs}					
230/240V	[kA]	100	100	100	100
400/415V	[kA]	25	25	50	50
440/460V	[kA]	25	25	50	50
500V	[kA]	25	25	50	50
690V	[kA]	4	4	6	6

❶ No backup fuse required.

IEC Performance Data

		Catalog Number KTV7-25H...									
		1.6A	**2.5A**	**4A**	**6.3A**	**10A**	**16A**	**20A**	**25A**	**29A**	**32A**
Rated Operational Current, I_e	[A]	1.6	2.5	4.0	6.3	10	16	20	25	29	32
Magnetic Release Current	[A]	82	82	82	82	130	208	260	325	402	448
Switching of Standard Three-Phase Motors											
AC-3											
230/240V	[kW]	0.25	0.37	0.75	1.5	2.2	4	5.5	5.5	7.5	7.5
400/415V	[kW]	0.55	0.75	1.5	2.2	4	7.5	10	11	13	15
500V	[kW]	0.75	1.1	2.2	3	6.3	10	11	15	18.5	20
690V	[kW]	~	~	~	~	~	~	~	~	~	~
Back-up Fuses											
gG, gL, only if $I_{cc} \geq I_{cu}$											
230/240V	[A]	❶	❶	❶	❶	❶	❶	❶	❶	❶	❶
400/415V	[A]	❶	❶	❶	❶	❶	❶	100	100	125	125
440/460V	[A]	❶	❶	❶	❶	❶	80	100	100	125	125
500V	[A]	❶	❶	❶	❶	❶	80	80	80	100	100
690V	[A]	~	~	~	~	~	~	~	~	~	~
Ultimate Short-Circuit Breaking Capacity I_{cu}											
230/240V	[kA]	65	65	65	65	65	65	65	65	65	65
400/415V	[kA]	65	65	65	65	65	65	65	65	50	50
440/460V	[kA]	65	65	65	65	65	50	50	50	25	25
500V	[kA]	65	65	65	65	65	50	50	50	25	25
690V	[kA]	~	~	~	~	~	~	~	~	~	~
Rated Service Short-Circuit Breaking Capacity I_{cs}											
230/240V	[kA]	65	65	65	65	65	65	65	65	50	50
400/415V	[kA]	65	65	65	65	65	50	25	25	25	25
440/460V	[kA]	65	65	65	65	65	50	25	25	20	20
500V	[kA]	65	65	65	65	65	50	25	25	20	20
690V	[kA]	~	~	~	~	~	~	~	~	~	~

❶ No backup fuse required.

Updated 03-31-22

General Data

		KT7-25S/32S	KT7-25H/32H	KT7-45H
Rated Insulation Voltage				
IEC, SEV, VDE 0660		690V	690V	690V
UL, CSA		600V	600V	600V
Rated Impulse Withstand Voltage (main & auxiliary circuits)				
U_{imp}/pollution degree		6kV/3	6kV/3	6kV/3
Rated Frequency		50/60 Hz	50/60 Hz	50/60 Hz
Utilization Category				
• IEC 60949-2 (Motor Protector)		A	A	A
• IEC 60949-4-1 (Motor Starter)		AC-3	AC-3	AC-3
Life Span				
Mechanical	[operations]	100,000	100,000	30,000
Electrical (I_e max.)	[operations]	100,000	100,000	30,000
Switching Frequency	[operations]	max. 25/h. (motor starts)		
Ambient Temperature				
Storage		-40° C...+80° C		
Operation		-25° C...+60° C		
Resistance to Climatic Change		IEC 68-2		
Moisture / Heat Resistance	(600068-2-3)	40°C, 93% relative humidity, 56 days		
Moisture / Change Resistance	(600068-2-3)	23°C, 83% relative humidity / 40°C, 92%, 56 cycles		
Dry Heat	(60086-2-2)	100°C Relative Humidity <50% 7 Days		
Site Altitude		to 2,000 m N.N.		
Protection Class		KT_7-25/32_: IP2X from all directions KT_7-45: IP2X from front with front (upper) terminal wired		
Resistance to Shock	(60068-2-2)	30 G, 11 ms All Axes		
Resistance to Vibration	(60068-2-6)	5G		
Rated Thermal Current I_{th}				
IEC, SEV, VDE 0660				
Up to 60° C ambient temperature	[A]	0.1...32	1.6...32	6.3...45
Dependence on Temperature		40°C - 60°C No Reduction 70°C 15% Reduction of the upper rated current I_e		
Overload Protection				
Characteristics		IEC60947-4-1 Motor protection (except KTB7)		
Ambient temperature		-20° C...+60° C		
Compensation		yes, differential release		
Phase-failure protection		10 (Except KTB7)		
Trip Class				
Magnetic Release		fixed setting		
Response Current (+/- 20%)		13…14 x $I_e$max. (for KTA7/KTB7) 16…21 x $I_e$max. (for KTC7) I_e max.=maximum values of setting ranges Fixed magnetic setting for KTV7, see ratings		
Total Power Loss P_v				
Motor protector at rated load Operating temperature	[W]	6...11.5	6...11.6	9...16
Application Conditions (KTV7)		PWM frequency ≤ 4kHz		
		VFD output frequency ≤ 400 Hz		

Weights

Description	Catalog Number	Weight
Motor Protectors	KTA7-25S/32S	317 g
	KTA7-25H/32H	373 g
	KTA7-45H	782 g
	KTB7-25S/32S	315 g
	KTB7-25H/32H	365 g
	KTB7-45H	782 g
	KTC7-25S/32S	315 g
	KTC7-25H/32H	365 g
	KTC7-45H	782 g
Auxiliary Contacts	KT7-PE1	10 g
	KT7-PA1	
	KT7-PEF1	15 g
	KT7-PAF1	
Undervoltage Trip	KT7-UA-✱	108 g
	KT7-AA-✱	110 g
	KT7-UA-L20-✱	116 g
Anti-Tamper Cover	KT7-25-CA	2 g

Description	Catalog Number	Weight
Lockable Twist Knob	KT7-KN1	5 g
	KT7-KRY1	
Locking Tag	KT7-DS	30 g
Door Coupling Handle	KT7-HTN	123 g
	KT7-HTRY	
Extension Shaft	KT7-HT	46 g
Legend Plate	KT7-HTFC	4 g
Feeder Terminal	KT7-32-A3E	172 g
	KT7-45-A3E	
Commoning Links	KT7-32-DB-45-2	47 g
	KT7-32-DB-45-3	80 g
	KT7-32-DB-45-4	104 g
	KT7-32-DB-45-5	132 g
	KT7-32-DB-54-2	52 g
	KT7-32-DB-54-3	86 g
	KT7-32-DB-54-4	118 g
	KT7-32-DB-54-5	154 g

General Data

	KT_7-25S/32S	KT_7-25H/32H	KT_7-45H
Features and Approvals			
Max. Current I_e	32 A	32 A	45 A
Current Rating	0.1…32 A	1.6…32 A	6.3…45 A
Short Circuit Protection	✓	✓	✓
Standard magnetic Trip	✓	✓	✓
High Magnetic Trip	✓	✓	✓
Magnetic Only Trip (MCP)	✓	✓	✓
Overload Protection	✓	✓	✓
Trip Class	✓	✓	✓
Application at output of VFD (multi-motor)		✓ (KTV7)	✓
Standards Compliance:			
CSA22.2, No. 14	✓	✓	✓
UL508 (Group Installation)	✓(see ratings)	✓(see ratings)	✓(see ratings)
UL508 Manual, Self-protected (Type E)	✓(see ratings)	✓(see ratings)	✓(see ratings)
UL508 (Overload Protection)	✓	✓	✓
IEC60947-1,-2	✓	✓	✓
IEC60947-4-1	✓	✓	✓
CE	✓	✓	✓
ATEX (IEC60079-14)	✓ (up to 25 A)	✓ (up to 25 A except KTV7)	✓
CCC	✓ (up to 25 A)	✓ (up to 25 A except KTV7)	✓
Accessories			
External Rotary Operator	✓	✓	✓
Auxiliary Contacts	✓	✓	✓
Trip Indicator Contacts	✓	✓	✓

			KT_7-25S/32S	KT_7-25H/32H	KT_7-45H
Power Terminals					
Terminal Type					
Screwdriver				Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3
	1 conductor	[mm²]/[AWG]		1...6 / No. 16...10	2.5...16 / No. 14...4
	2 conductor	[mm²]/[AWG]		1...4 / No. 16...10	2.5...10 / No. 14...4
	1 conductor	[mm²]/[AWG]		1.5...6 / No. 16...8	2.5...16 / No. 14...4
	2 conductor	[mm²]/[AWG]		1.5...6 / No. 16...8	2.5...10 / No. 14...4
	1 conductor	[mm²]/[AWG]		1...6 / No. 16...10	2.5...10 / No. 14...8
	2 conductor	[mm²]/[AWG]		1...6 / No. 16...10	2.5...10 / No. 14...8
Tightening torque		[Nm]/[lb-in.]		2...2.5 / 18...22	3...3.5 / 27...30

Updated 03-31-22

Accessories for KT7 Motor Circuit Controllers

			Auxiliary Contact Blocks for Front Mounting Catalog Number KT7-PE1, KT7-PEF1			Auxiliary Contact Blocks for Right-Side Mounting Catalog Number KT7-PA1, KT7-PAF1				
IEC Rated Thermal Current I_{th}										
Rated Voltage		[V]	300 max.			600 max.				
at 40°C ambient temperature		[A]	5			10				
at 60°C ambient temperature		[A]	4			6				
UL/CSA Rated Thermal Current I_{th}										
Rated Voltage		[V]	300 max.			600 max.				
Continuous Thermal Current According to NEMA ❶			Class	Amps		Class	Amps			
	AC		B 300	5		B 600	5			
	DC		Q 300	2.5		Q 600	2.5			
Back-Up Fuses gG, gL		[A]	10			10				
Rated Thermal Current I_{th}										
AC-15		[V]	24	120	240	24	120	240	415	690
		[A]	4	3	1.5	6	5	3	2	0.7
DC-13		[V]	24	120	240	24	120	240	415	
		[A]	2	0.5	0.25	2	0.5	0.25	0.15	
Terminal Parts										
Terminal Type										
Screwdriver			Pozidrive No. 2/Blade No. 3			Pozidrive No. 2/Blade No. 3				
	1 conductor	[mm²]/[AWG]	0.5...1.5 / No. 18...14			0.5...2.5 / No. 18...14				
	2 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	1 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	2 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	1 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
	2 conductor	[mm²]/[AWG]	0.75...1.5 / No. 18...14			0.75...2.5 / No. 18...14				
Tightening torque		[Nm]/[lb-in.]	1.2...1.5 / 10.6...13			1.2...1.5 / 10.6...13				
Lockable Twist Knob (KT7-KN1 & KT7-KRY1)										
Tightening torque		[Nm]/[lb-in.]	1 / 8.8 (T10)							
Mounting Depth – Door Coupling Handles (All KT7-HT...)										
Mounting Depth when using motor circuit controller:										
	KT7-25S/32S	[mm]/[in.]	105.5 mm ± 5 mm (4.15" ± 3/16")							
	KT7-25H/32H	[mm]/[in.]	114.5 mm ± 5 mm (4.5" ± 3/16")							
	KT7-45H	[mm]/[in.]	137.1 mm ± 5 mm (5.4" ± 3/16")							
Mounting Depth – Extension Shaft (KT7-HT)										
Mounting Depth range when using motor circuit controller:										
	KT7-25S/32S	[mm]/[in.]	117...338 mm (4.6"...13.3")							
	KT7-25H/32H	[mm]/[in.]	126...347 mm (5.0"...13.7")							
	KT7-45H	[mm]/[in.]	149...369 mm (5.9"...14.5")							

❶ See page A7 for details of NEMA Contact Class.

Updated 03-31-22

KT7 Accessories

			Undervoltage Trip for Left-Side Mounting Cat. Number KT7-UA-*	Undervoltage Trip with 2 Auxiliary Contacts for Left-Side Mounting Cat. Number KT7-UA-L20-*	Shunt Trip for Left-Side Mounting Cat. Number KT7-AA-*
Actuating Voltage		Pull-in Drop-out	0.85...1.1 x U_s 0.7...0.35 x U_s	0.85...1.1 x U_s 0.7...0.35 x U_s	0.7...1.1 x U_s
Rated Control Voltage		minimum maximum	21V 50 Hz, 24V 60 Hz 600V 50 Hz	21V 50 Hz, 24V 60 Hz 600V 50 Hz	21V 50 Hz, 24V 60 Hz 600V 50 Hz
On-Time			100%	100%	AC - 100% DC - Max. 5 sec.
Coil Rating		Pull-in Hold	8.5 VA, 8 W 4 VA, 2 W	8.5 VA, 8 W 4 VA, 2 W	8.5 VA, 8 W 4 VA, 2 W
Terminal Parts					
Terminal Type					
Screwdriver				Pozidrive No. 2/Blade No. 3	
	1 conductor	[mm²]/[AWG]		0.5...2.5 / No. 18...14	
	2 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	1 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	2 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	1 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
	2 conductor	[mm²]/[AWG]		0.75...2.5 / No. 18...14	
Tightening torque		[Nm]/[lb-in.]		1.2...1.5 / 10.6...13.3	

			Feeder Block KT7-25-A2E	Feeder Terminal KT7-32-A3E	Compact Busbar KT7-32-DB...	Feeder Terminal KT7-45-A3E	Compact Busbar KT7-45-DB...
Rated Thermal Current I_{th}		[V]	600	600	600	600	600
at 60° C ambient temperature		[A]	64	64	64	120	120
	1 conductor	[mm²]/[AWG]	4...25/No. 10...4	2.5...25/No. 14...4	~	4...50/12...1/0	~
	1 conductor	[mm²]/[AWG]	4...25/No. 10...4	2.5...25/No. 14...4	~	2.5...50/12...1/0	~
	1 conductor	[mm²]/[AWG]	2.5...25/No. 14...4	2.5...25/No. 14...4	~	2.5...50/12...1/0	~
Tightening torque		[Nm]/[lb-in.]	3...3.5 / 27...31	3...3.5 / 27...31	~	5...6/45...54	~

KF7 Fuse Holder Accessories

		KF7 Fuse Holder
Rated Thermal Current I_{th}	[V]	600
at 60° C ambient temperature	[A]	30
Short Circuit		
Withstand	[KA]	200
U_{imp}	[KV]	6
Terminal Parts		
Terminal Type		
Screwdriver		Pozidrive No. 2/ Blade No. 3
1 conductor	[mm²]/[AWG]	1…4 / No. 16…10
1 conductor	[mm²]/[AWG]	1…4 / No. 16…10
Tightening torque	[Nm]/[lb-in.]	1.7 / 15

Time-Current Characteristic

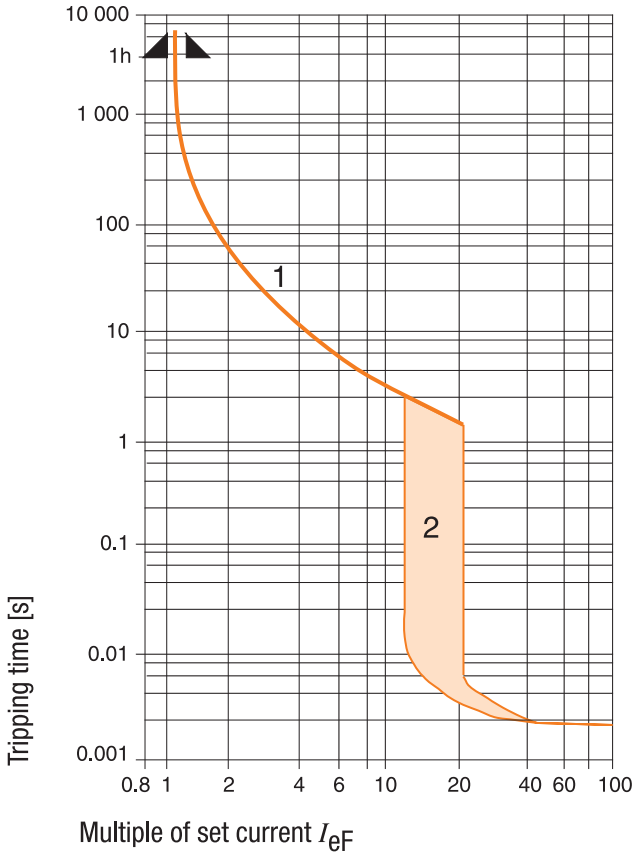

KTA7 Motor Protection (for KTV7, see ratings)

1. Thermal Release Trip Current

The adjustable current-dependent delayed bimetal release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20°C starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single-phasing. The overload characteristic is also valid for transformer protection.

2. Magnetic Release Trip Current

The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13 times the maximum value of setting range (high inrush protection -20 x I_e maximum). At a lower overload setting the magnetic trip is correspondingly higher.

Current Setting I_{ef}

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1. If a different value is prescribed (e.g., reduced I_e for cooling medium having a temperature higher than 40°C or a place of installation higher than 2000m above sea level), the setting current is equal to the reduced rated current I_e of the motor.

Cut-off Current ❶

KTA/B/C7-25/32S
Max. Cut-Off-Current, Ue = 500V

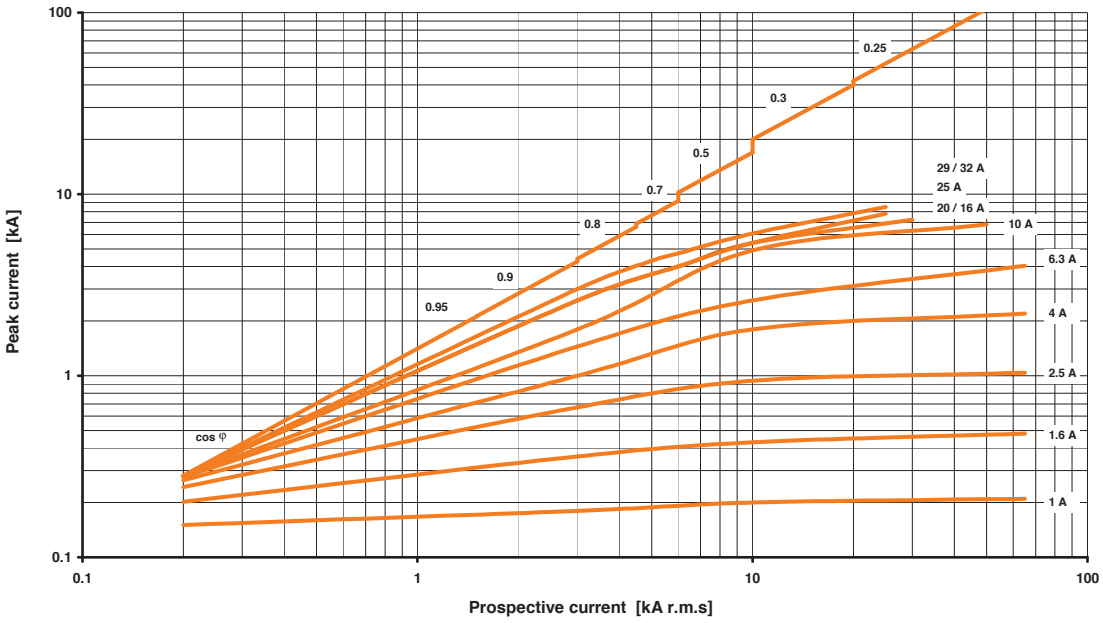

KTA/B/C7-25/32H
Max. Cut-Off Current, U_e = 500V

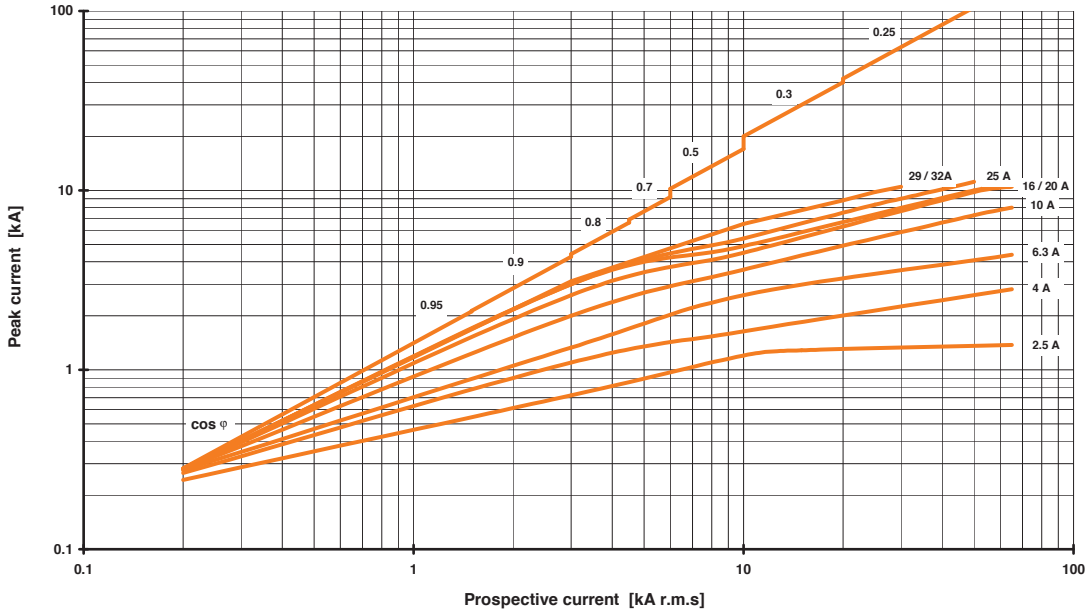

❶ A full size (8-1/2 x 11) set of “Maximum Cut-Off Current (Let-Thru Current)” and “Maximum Let-thru Energy (I2t)” curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Cut-off Current ❶

KTA/B/C7-45H
Max. Cut-Off Current, Ue = 500V

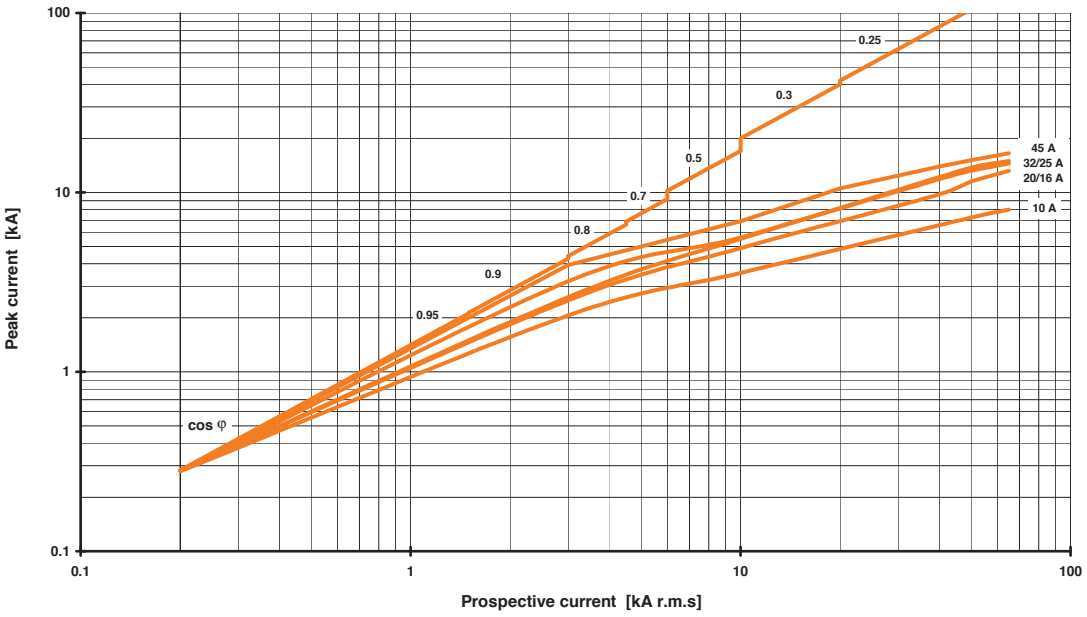

KTV7
Max. Cut-Off Current, U_e = 400…415V

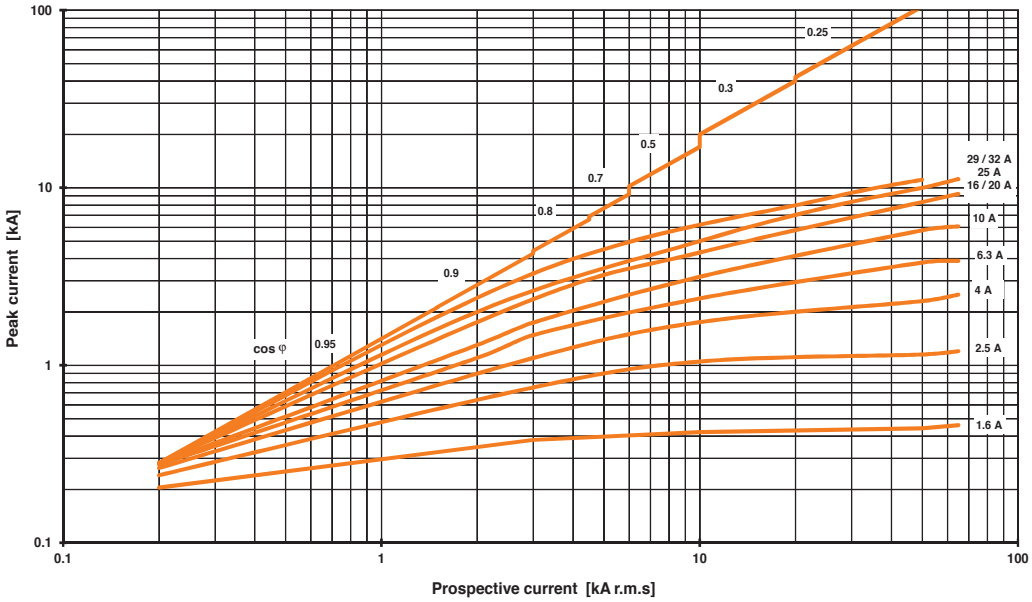

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Let-Through Energy ❶

KTA/B/C7-25/32S
Max. Let-Trough Energy, Ue = 500V

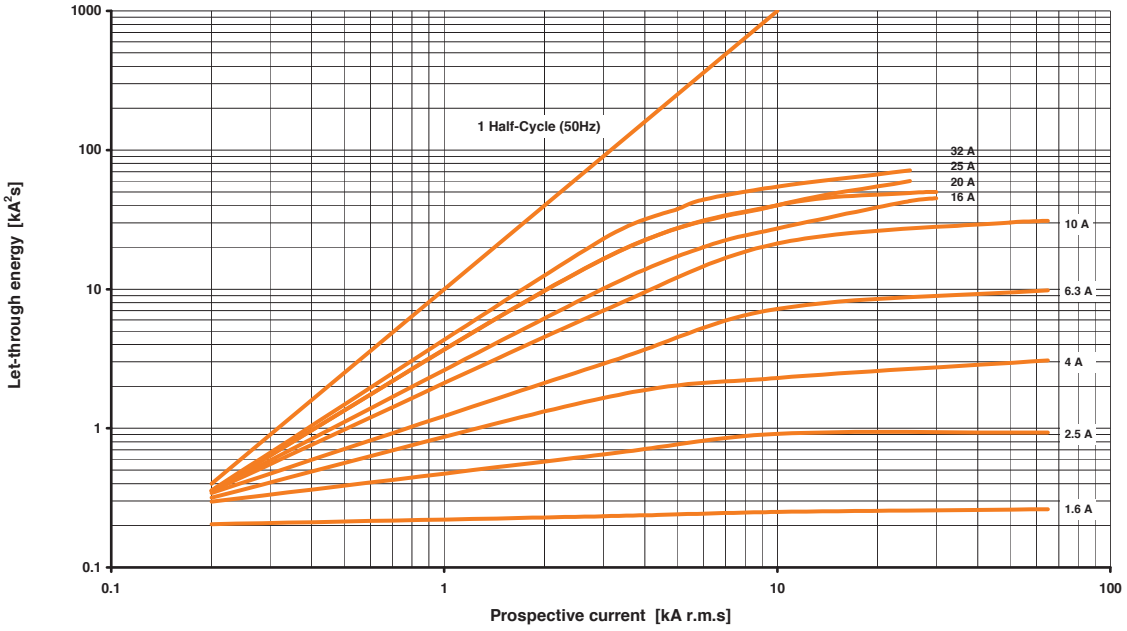

KTA/B/C7-25/32H
Max. Let-Through-Energy, U_e = 500V

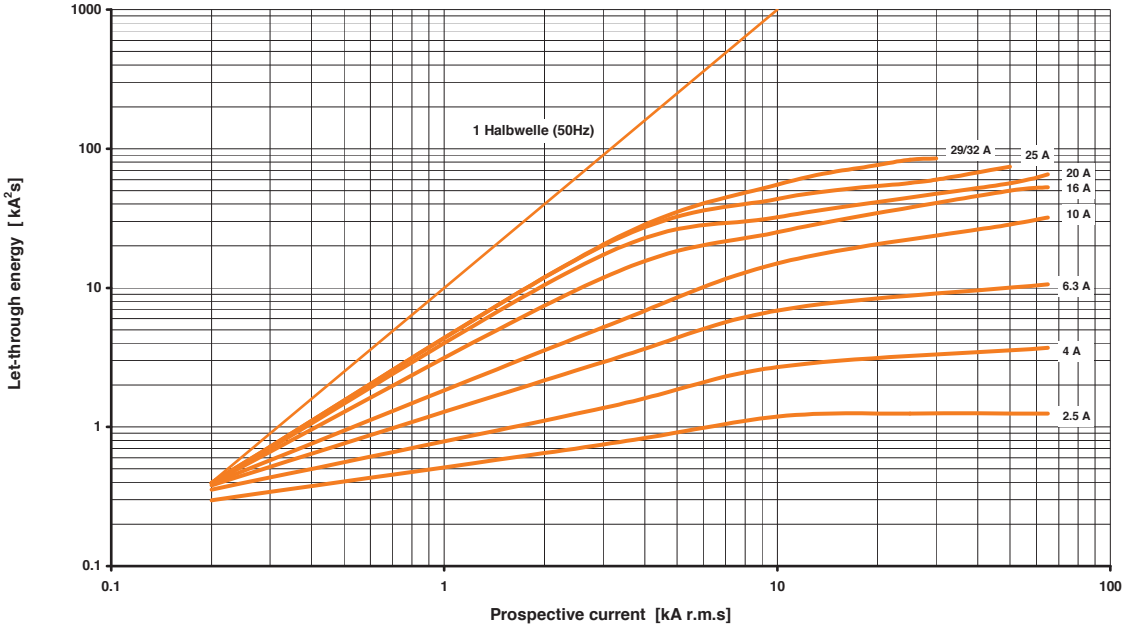

❶ A full size (8-1/2 x 11) set of “Maximum Cut-Off Current (Let-Thru Current)” and “Maximum Let-thru Energy (I2t)” curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

Let-Through Energy ❶

KTA/B/C7-45H
Max. Let-Through-Energy, U_e = 500V

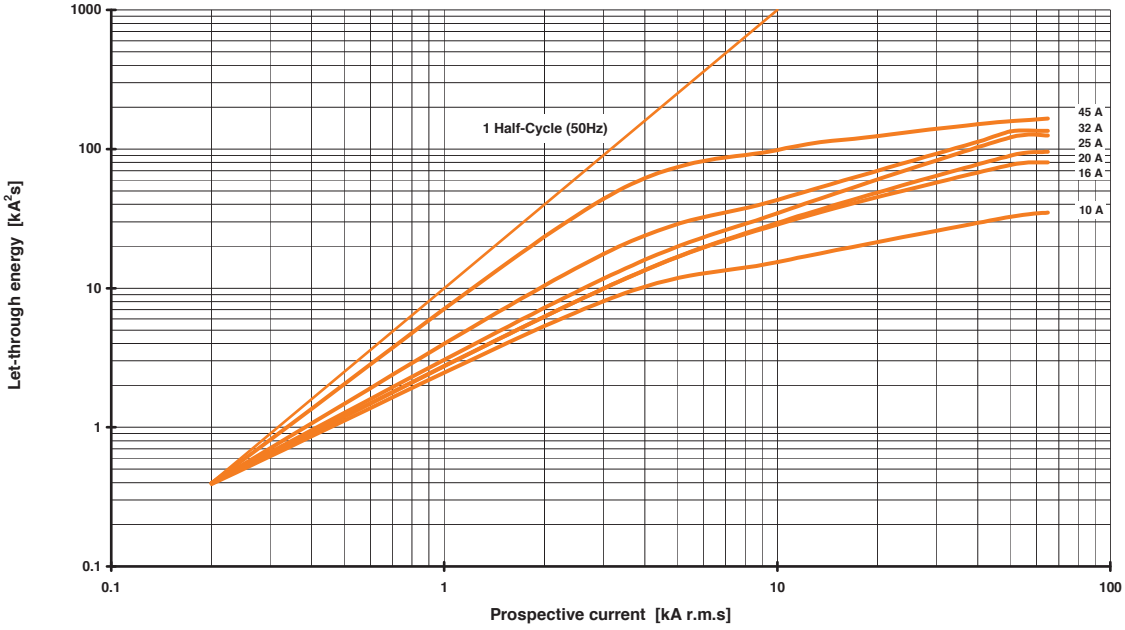

KTV7
Max. Let-Through-Energy, U_e = 400... 415V

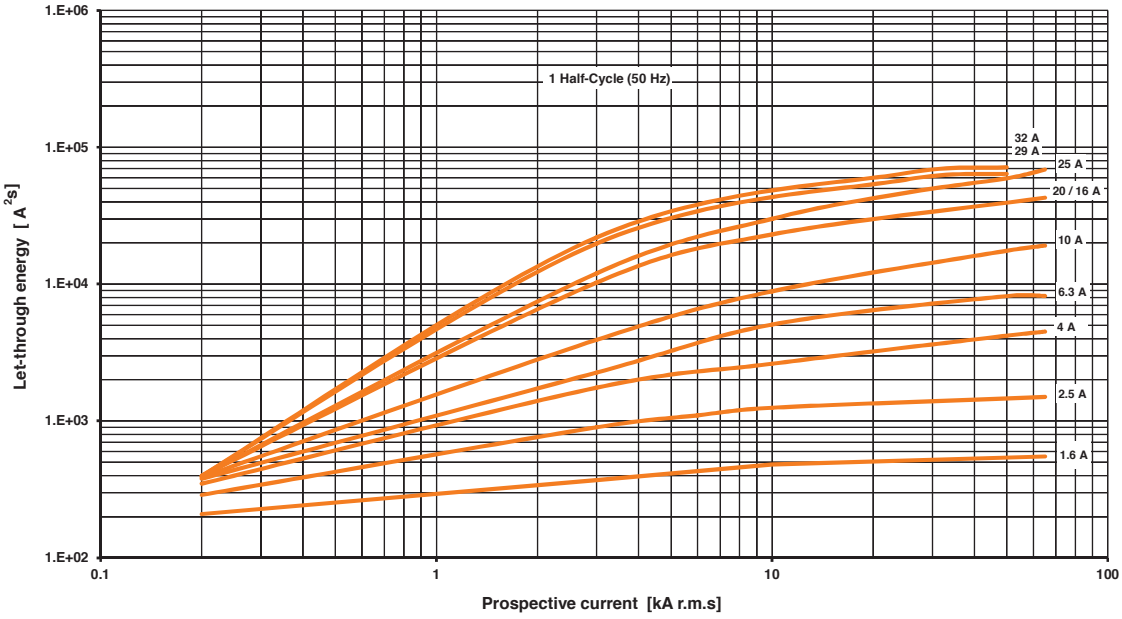

❶ A full size (8-1/2 x 11) set of "Maximum Cut-Off Current (Let-Thru Current)" and "Maximum Let-thru Energy (I2t)" curves for 400…415V, 500V and 690V can be downloaded from http://www.sprecherschuh.com.

KTA7/KTB7 & KTC7 Bus Bar and Supply Blocks

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

KT7-32-A3E



KT7-45-A3E





KT7-32-DB



KT7-45-DB





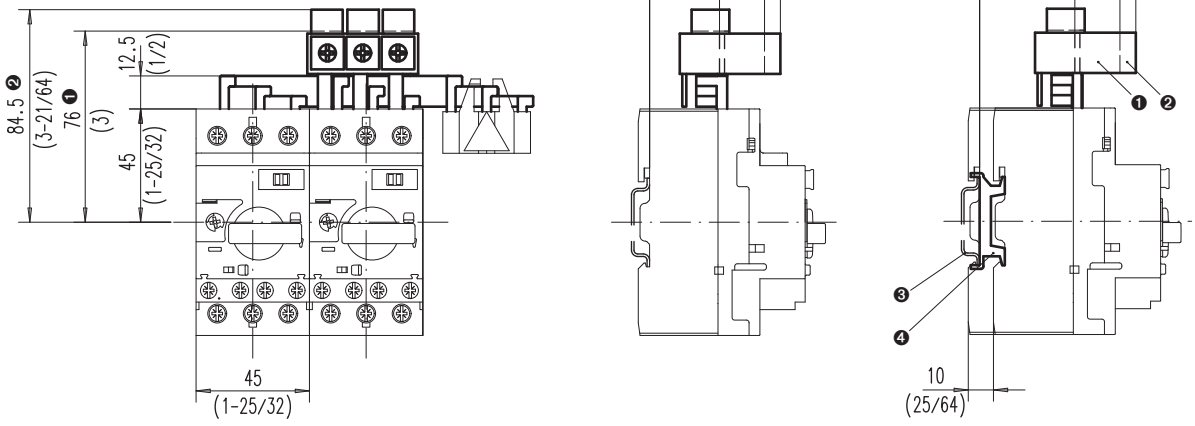

❶ Compact Busbar Feeder Terminal IEC
❷ Compact Busbar Feeder Terminal UL type E and IEC
❸ Mounting on 35 mm DIN Rail
❹ Top Hat Rail Adapter 10 mm

Updated 03-31-22

KT_7-25/32 Motor Circuit Controllers *(without Terminal Adaptor KT7-25-TE1)*

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

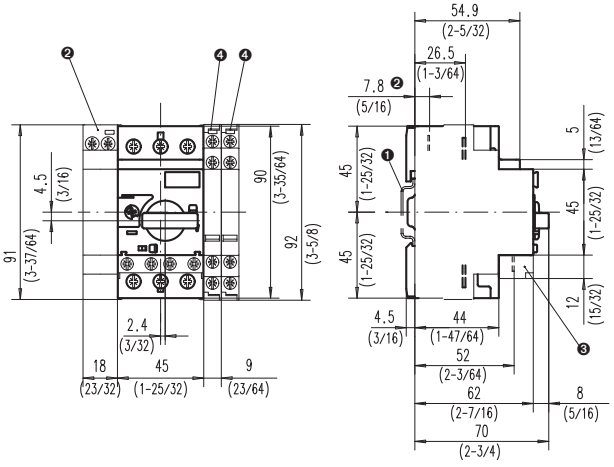

KT_7-25S/32S

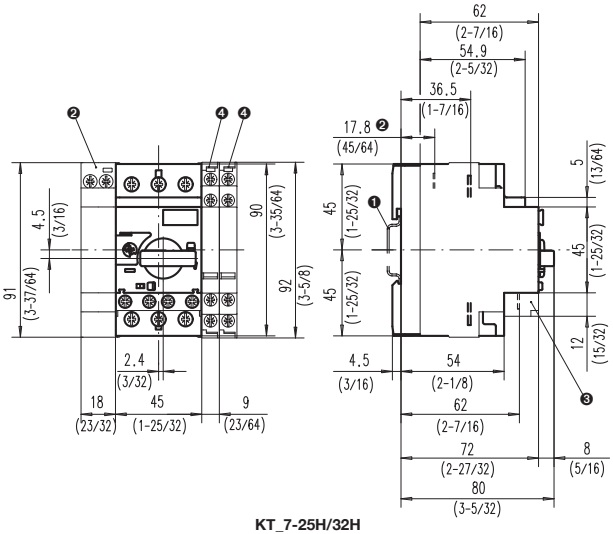

KT_7-25H/32H

❶ Mounting on 35 mm DIN rail
❷ Undervoltage/shunt trip
❸ Auxiliary contact (front mounted)
❹ Auxiliary contact (side mounted)

KT_7-25/32 Motor Circuit Controllers *(with Terminal Adaptor KT7-25-TE1)*

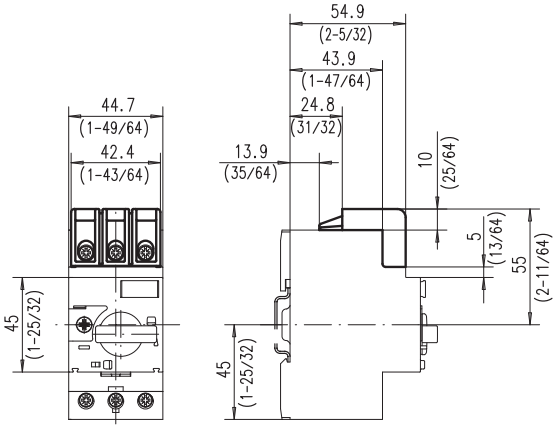

KT_7-25S/32S

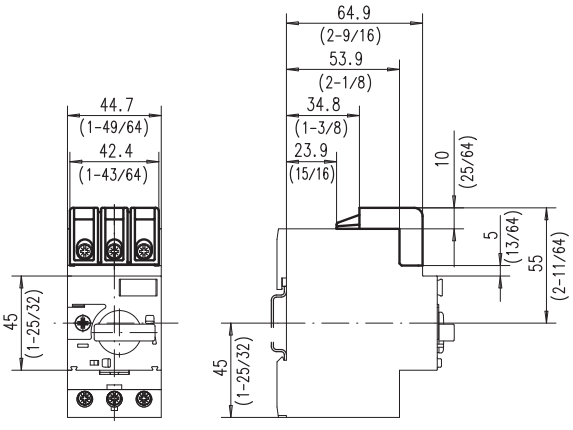

KT_7-25H/32H

Updated 03-31-22

KT_7-45H Motor Circuit Controllers *(without Terminal Adaptor KT7-45-TE)*

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

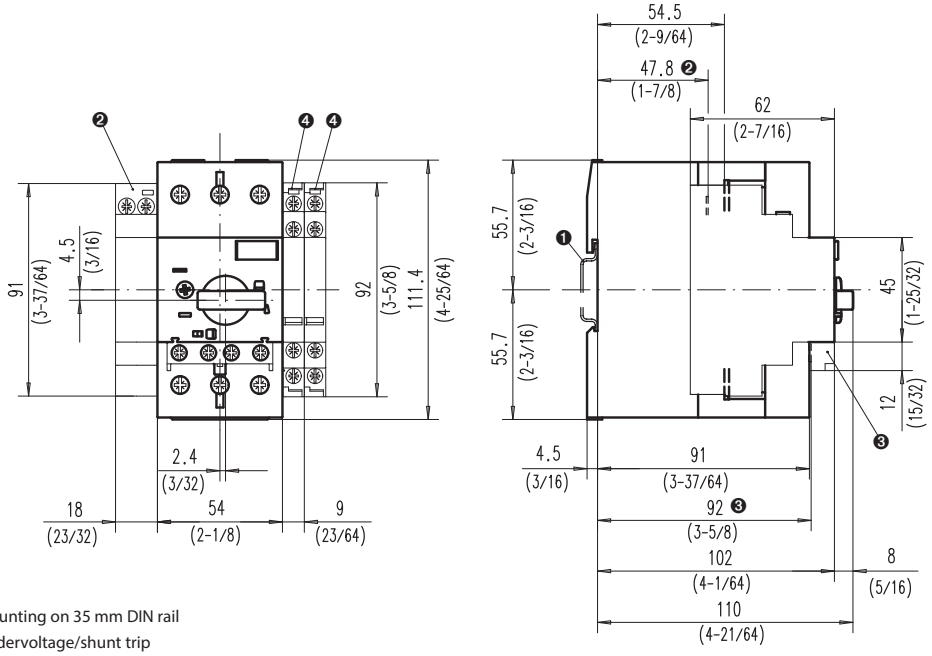

❶ Mounting on 35 mm DIN rail
❷ Undervoltage/shunt trip
❸ Auxiliary contact (front mounted)
❹ Auxiliary contact (side mounted)

KT_7-45H

KT_7-45H Motor Circuit Controllers *(with Terminal Adaptor KT7-45-TE)*

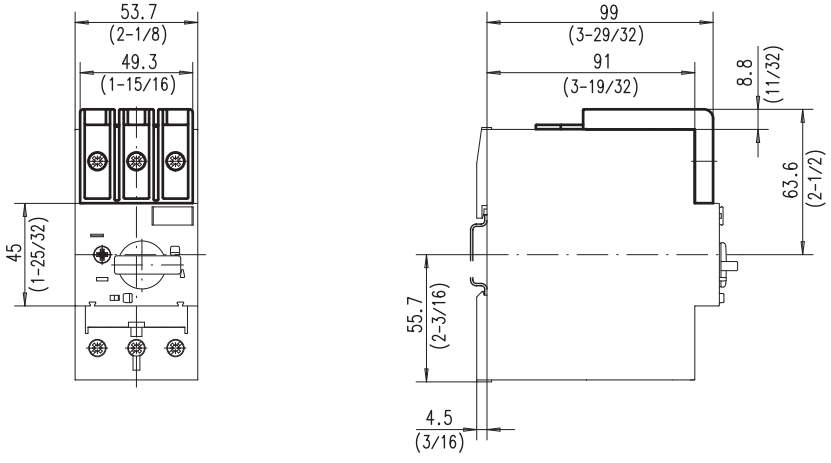

KT_7-45H

Updated 03-31-22

KTV7-25/32 Motor Circuit Controllers

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

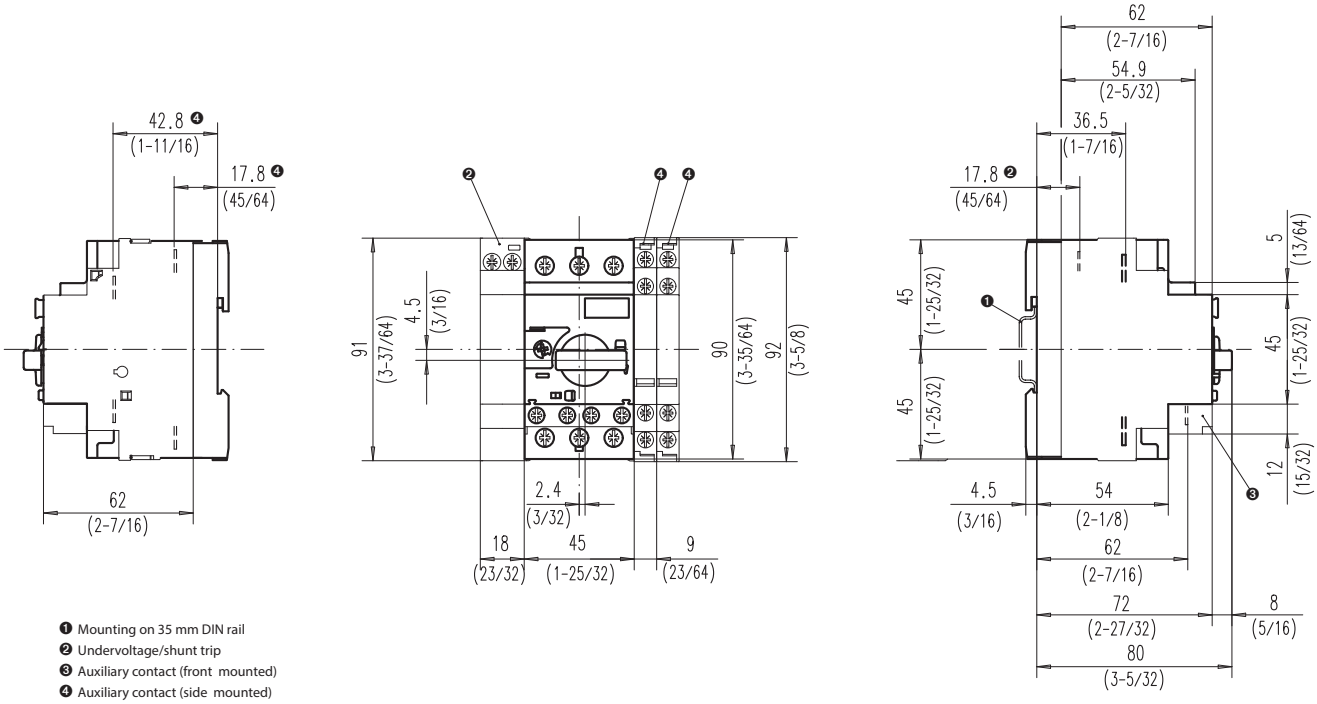

❶ Mounting on 35 mm DIN rail
❷ Undervoltage/shunt trip
❸ Auxiliary contact (front mounted)
❹ Auxiliary contact (side mounted)

Minimum distance to grounded parts or walls

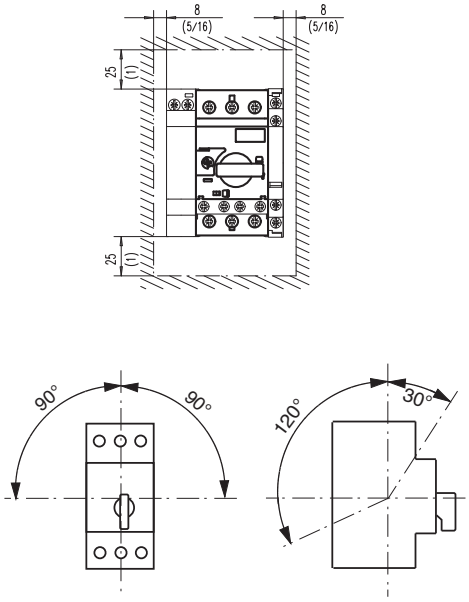

KT7-TE1 Type E adapter on KTV7

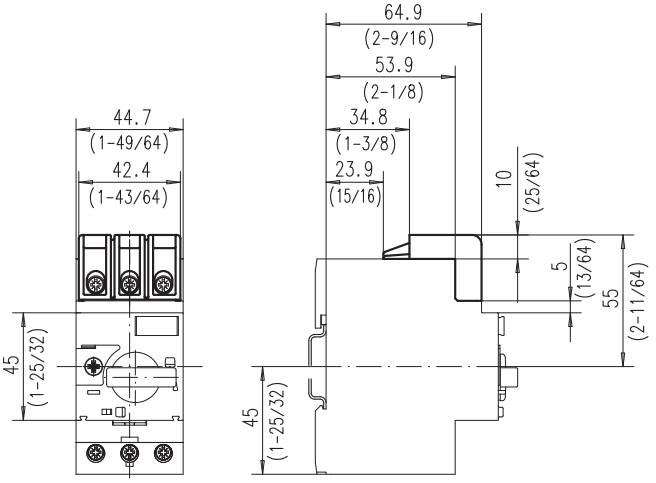

Updated 03-31-22

KT7 Motor Circuit Controllers Mounting/Safety Clearance

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

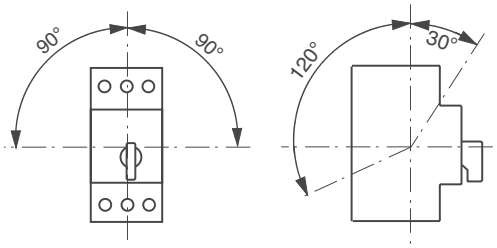

KT_7-25/32



KT_7-45H

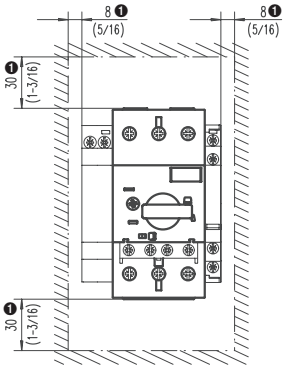

❶ Minimum distance to grounded parts or walls

KT7-45-AS Screw Adapter

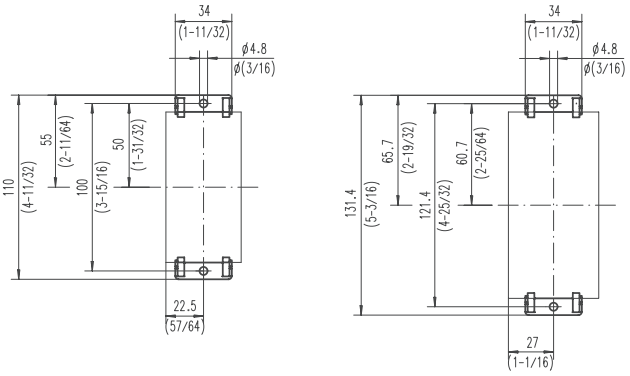

KT7-25-A2E Terminal Block

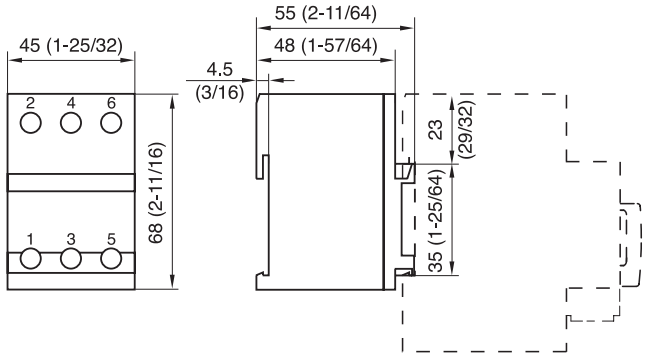

Mounting Position KT7, KTU7

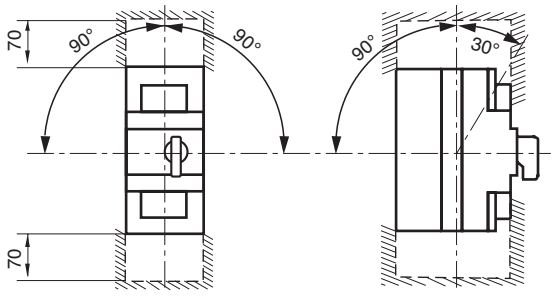

Mounting position/safety clearance

Updated 03-31-22

KT7-HTN/HTRY Motor Circuit Controller Door Coupling Handle

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

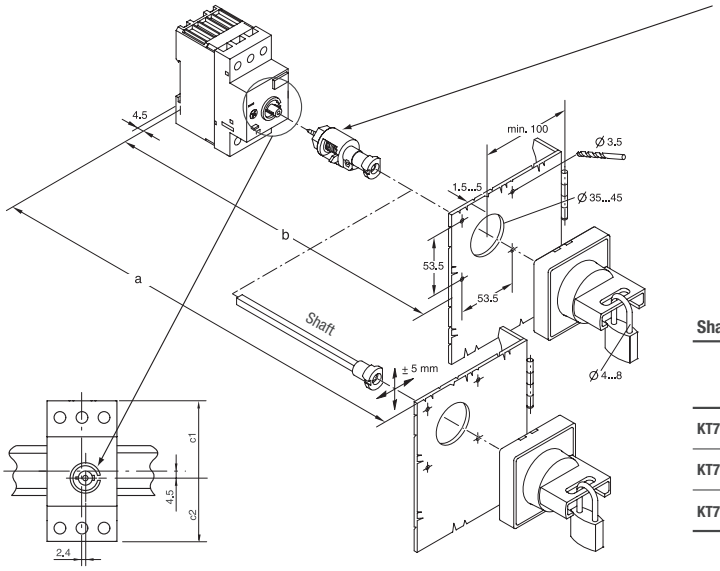

KT7-HTC Coupling is included in Door Handle Kits KT7-HTN and KT7-HTRY. This coupling replaces the knob shipped as standard on the controller. Design "D" Door Coupling Handle Kits include an interface for the "Stops" molded into Design "C" KTA7/KTB7/KTC7 Controllers, which inhibits excessive rotation of the handle mechanism. The old Design "C" Door Handle Kits will fit new Design "C" Controllers (shipped in WHITE boxes), but will not take advantage of the "Stops". Design "D" Door Handle Kits are backward compatible.

Shaft Dimensions

	a		b	c1	c2
	Includes 250mm Shaft KT7-HT	Includes 400mm Shaft KT7-HTL	No Shaft		
KT7-25S/32S	117…338 (4.6…13.3 in)	117…488 (4.6…19.2 in)	105.5 ± 5	49.5	40.5
KT7-25H/32H	126…347 (5.0…13.7 in)	126…497 (5.0…19.6 in)	114.5 ± 5	49.5	40.5
KT7-45H	148.6…369.6 (5.9…14.5 in)	148.6…519 (5.9…20.4 in)	137.1 ± 5	59.35	50.35

If using KT7-SHS Shaft Support see page F41 for dimensions

KTA7/KTB7/KTC7 with CA7 Connection Modules and Kits

Ecombo 1)

KT7-25S-PEC23
KT7-25H-PEC23



Standard Connection Modules 2)

KT7-25S-PNC23
KT7-25H-PNC23



KT7-25H -PNC37



KT7-45H-PNC37



KT7-45H-PNC43



Coil Extension Modules 3)

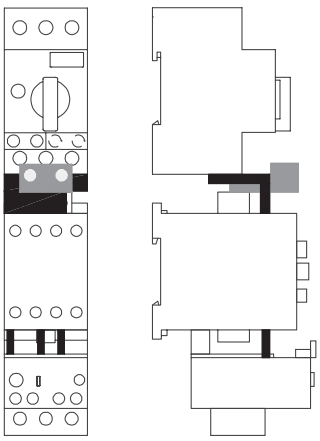

1) Ecombo Modules
Electrical and mechanical connection between motor circuit controller and contactors with AC coil. For CA7-9...23 only. Compatible with the reversing- and WYE-delta starter components.

2) Standard Connection Modules
Electrical connection between motor circuit controller and contactors with AC coil. For CA7-9...43. Compatible with the reversing- and WYE-delta starter components.

3) Coil Extension Modules
Simplifies access to the coil terminals on 3-component starters.
For CA7-9...23 = **KT7-25S-PSC23**
For CA7-30...43 = **KT7-45H-PSC43**

Updated 03-31-22

KT7 Handle Assembly with KT7-SHS Shaft Support

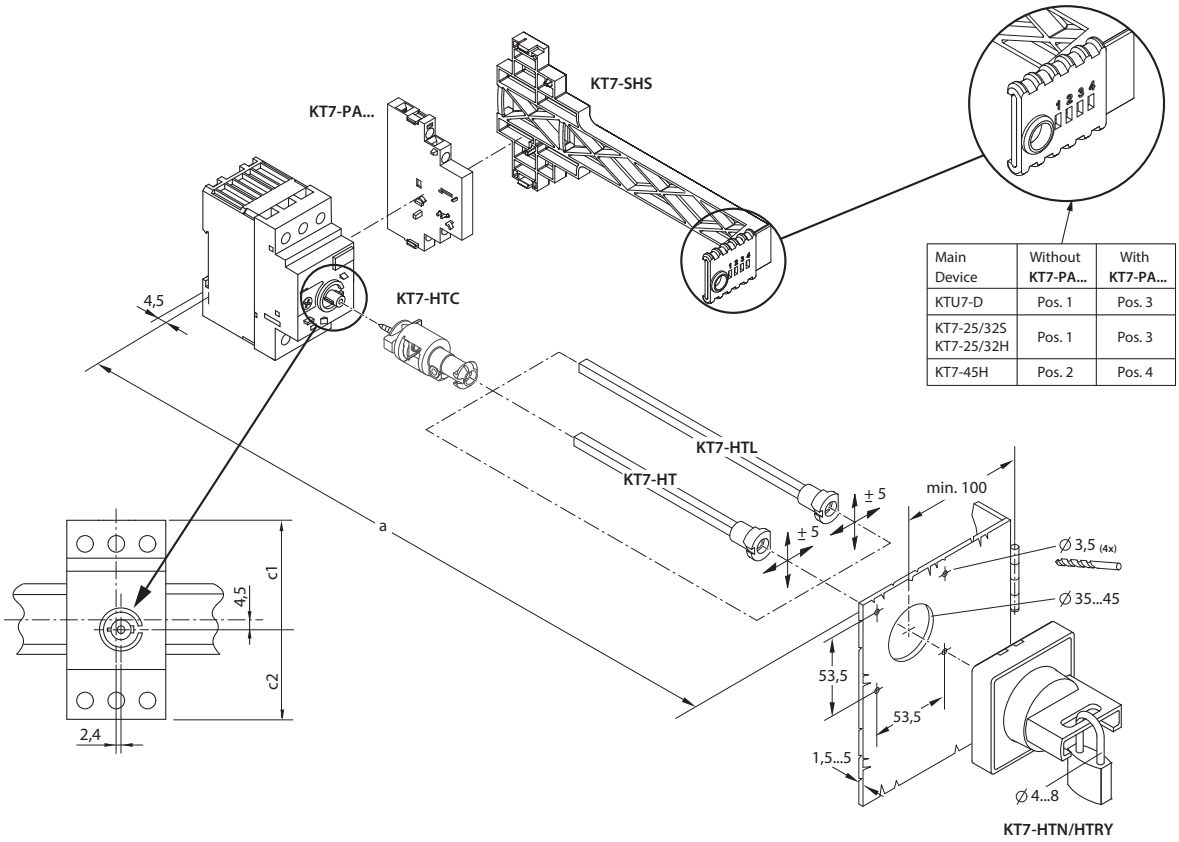

Main Device	Without KT7-PA...	With KT7-PA...
KTU7-D	Pos. 1	Pos. 3
KT7-25/32S KT7-25/32H	Pos. 1	Pos. 3
KT7-45H	Pos. 2	Pos. 4

	a KT7-HT	a KT7-HTL	Use KT7-SHS when a >	c1	c2
KT7-25/32S	117...338	117...488	260	49.5	40.5
KT7-25/32H	126...347	127...497	270	49.5	40.5
KT7-45H	148.6...369.6	148.6...519	300	59.35	50.35
KTU7-D	127...348	127...497	270	55.5	46.5

Assembling Aid

KT7-SHS Shaft Support Dimensions



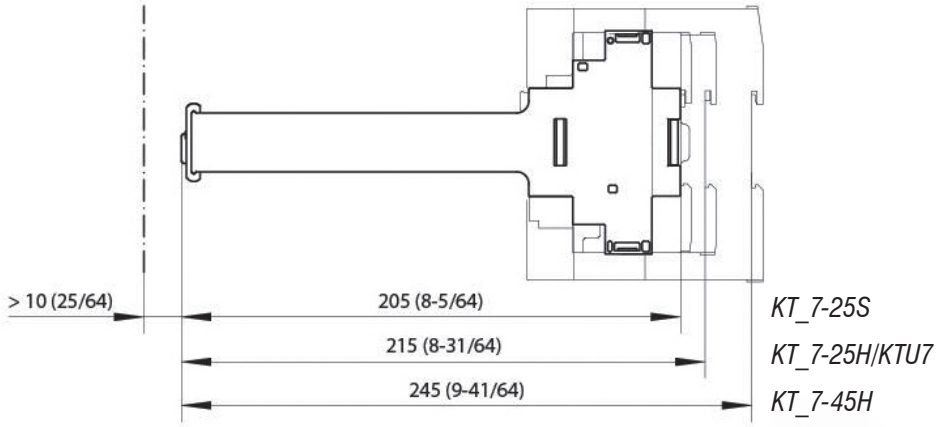

Updated 03-31-22

KT7-SY/SB Switch Handle

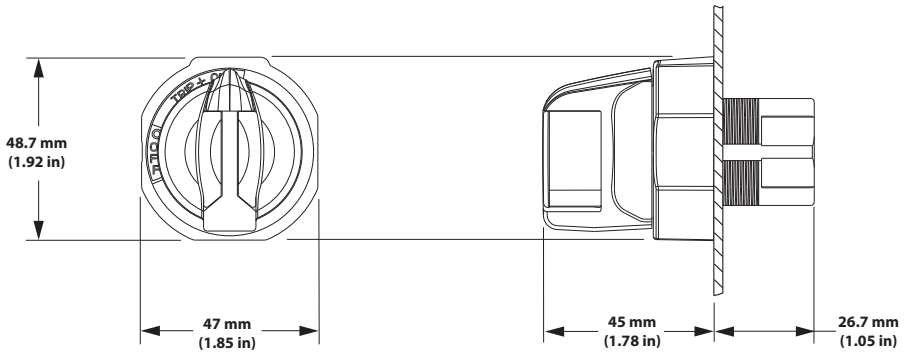

KT7-SY/SB Assembly

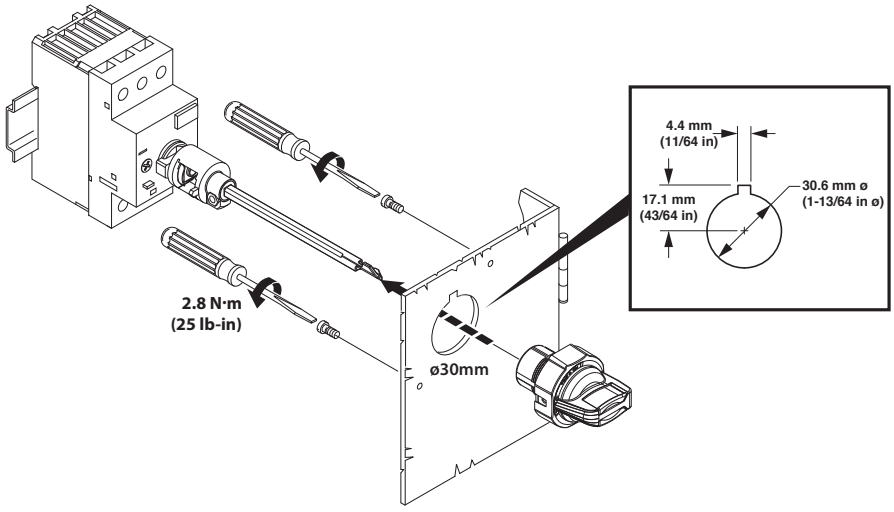

Updated 03-31-22

Type W Mounting Modules & Spacer ❶

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

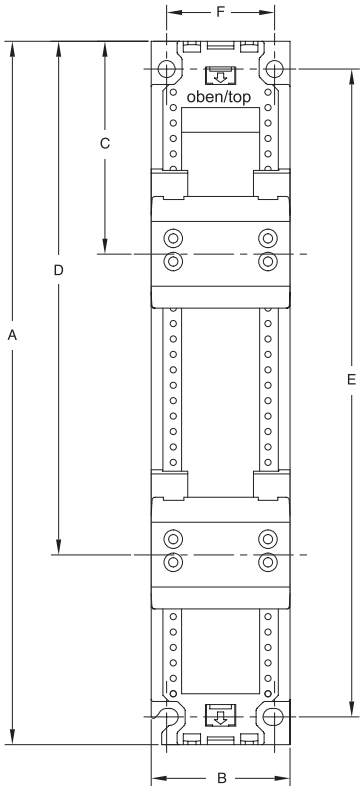

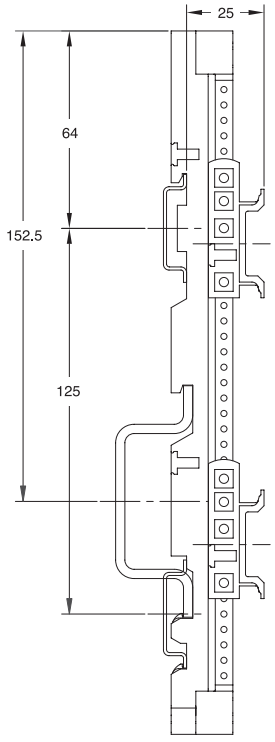

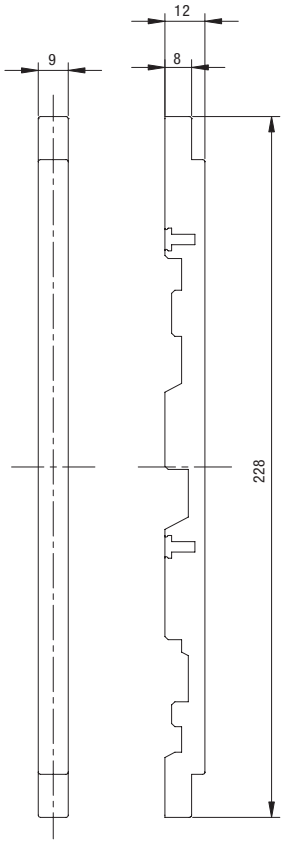

Spacer W-32955

Catalog Number	A	B	C	D	E	F
W-32489	228 (8-31/32)	45 (1-25/32)	69 (2-23/32)	165.5 (6-35/64)	210 (8-17/64)	35 (1-3/8)
W-32490	228 (8-31/32)	54 (2-1/8)	69 (2-23/32)	174 (6-27/32)	210 (8-17/64)	40 (1-37/64)
W-32496	283 (11-9/64)	45 (1-25/32)	69 (2-23/32)	166.5 (6-35/64)	265 (10-7/16)	40 (1-37/64)
W-32497	283 (11-9/64)	54 (2-1/8)	69 (2-23/32)	174 (6-27/32)	265 (10-7/16)	40 (1-37/64)

❶ Use Pozidriv #1 (PZ1) screwdriver on DIN rail screws.

KF7 Fuse Holders Dimensions

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

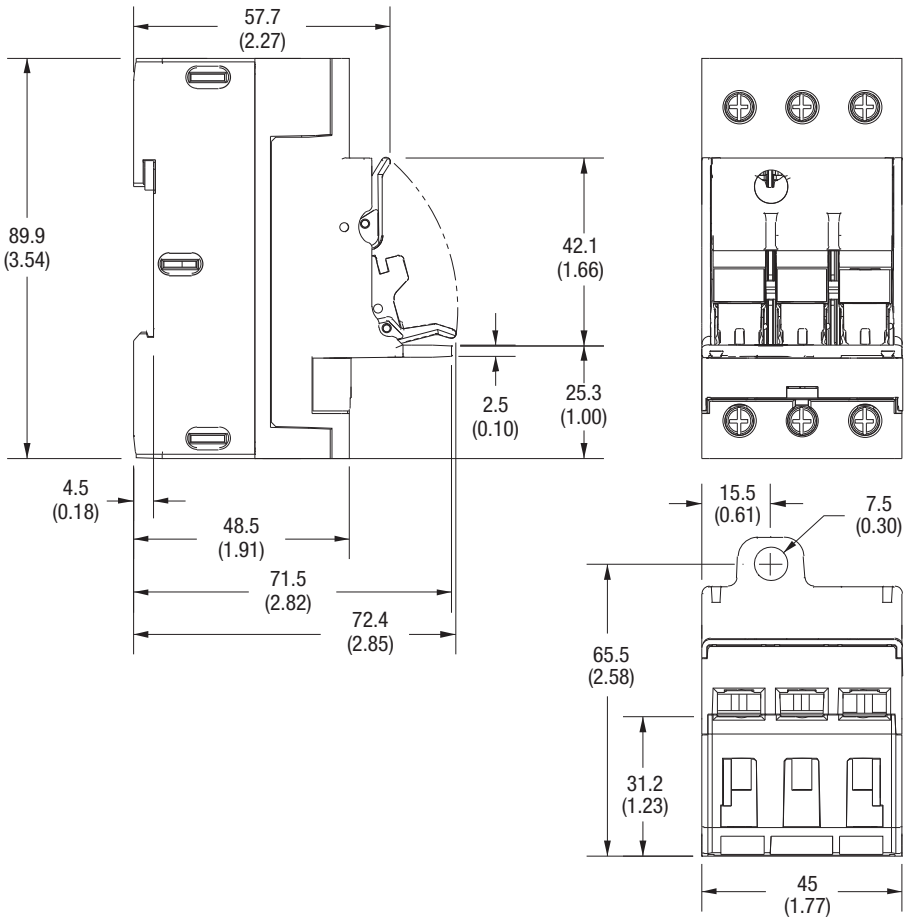

KF7 Fuse Holders Wiring Diagram (IEC)

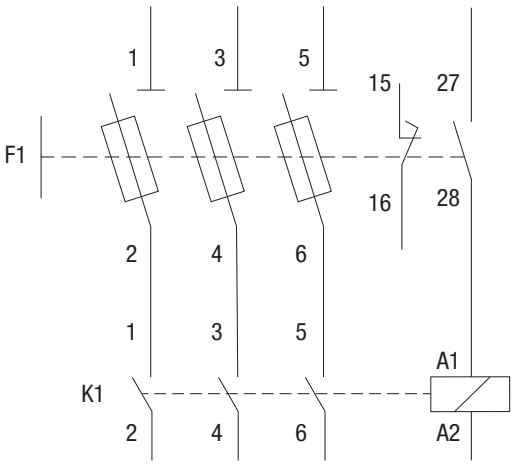

Updated 03-31-22

KF7 Fuse Holder used with CA7 Contactor

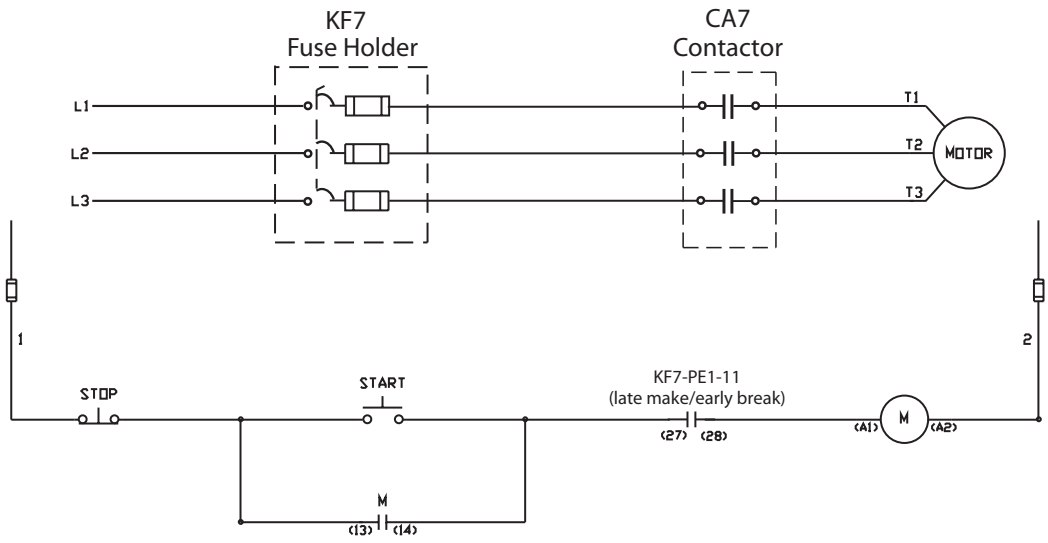

KF7 Fuse Holder used with KTA7 Motor Circuit Controller and CA7 Contactor

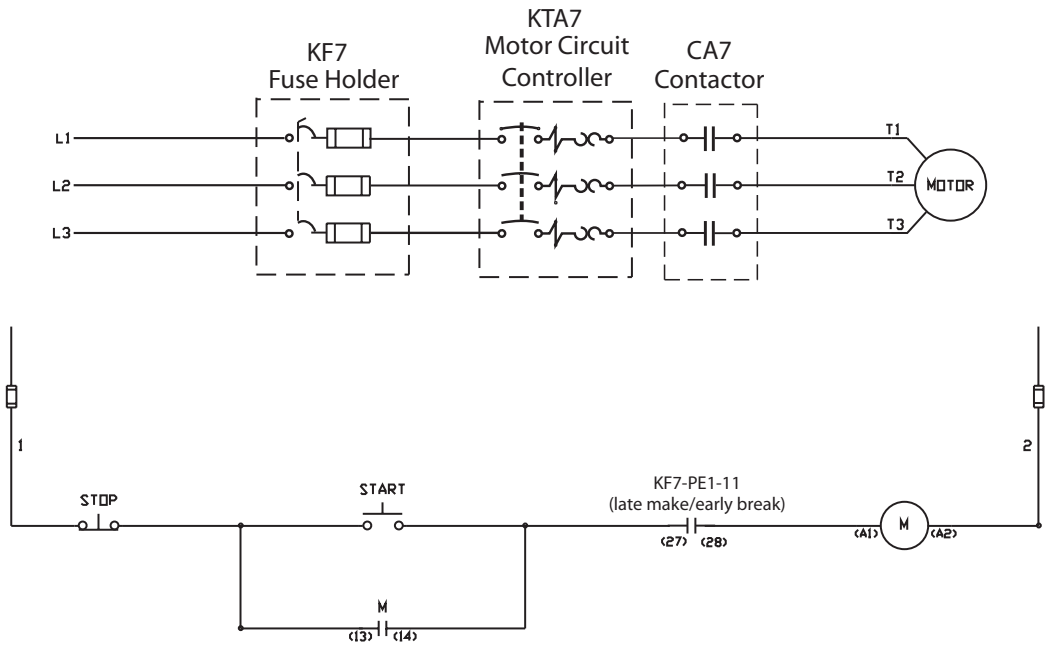

Updated 03-31-22

Notes

Series KTU7 UL489 Molded Case Circuit Breakers

DISCONTINUED

Versatile, convenient and space saving… for a variety of applications

Sprecher+Schuh's KTU7 series of UL Molded Case Circuit Breakers are UL489 and CE listed for global applications. The current limiting circuit breaker provides fixed short circuit and overcurrent protection and offers high interrupting ratings for 2- and 3-pole devices from 0.5 to 30A. These Circuit breakers are 100% rated up to 10A.

Accessories are intelligently designed to be field installed. The compact busbars and supply blocks reduce wiring errors and installation labor cost. Connection modules for the CA7 Contactors simplify wiring and can reduce the number of DIN rails required, compacting panel space even further.

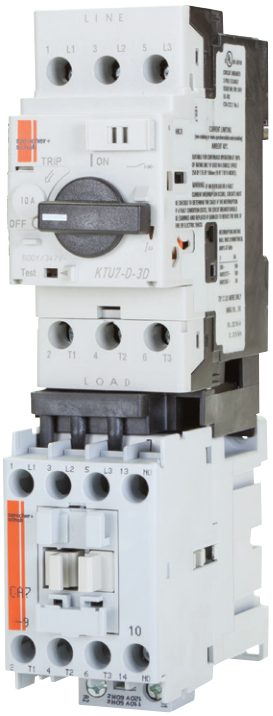

c UL us

CE

Advantages…

- Small foot print saves panel space, just 45 x 102 x 85 mm, up to 50% smaller than traditional MCCBs.
- Interrupt rating of 65kA at 480Y/277V may allow higher overall panel short circuit rating
- Up to 6 times higher interrupting rating vs. traditional miniature circuit breakers.

Ideal Applications…

- Feeder Circuits for small cabinets, distribution panels, branch circuit protection, transformers and heaters
- Control circuits for control circuit transformers and power supplies
- Industrial Heating applications
- Air conditioning and refrigeration applications

Compare these advanced features

Marker Holder

Three Position Handle
- ON at 90º
- OFF at 0º
- Trip at 45º (shown)

Trip differentiation flag
- Red Short Circuit Trip
- Black Overload Trip

Device Rating

Test Trip Actuator

KTU7 Circuit Breaker, Fixed Thermal-Magnetic ❷

Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA]			Catalog Number
		240V	480Y/277V	600Y/347V	
KTU7-D — High Interrupting Capacity – 2-Pole					
0.5	15…20xIn	100	100	50	**KTU7-D-2D-0.5** ❶
1.0	15…20xIn	100	100	50	**KTU7-D-2D-1** ❶
2.0	15…20xIn	100	100	50	**KTU7-D-2D-2** ❶
3.0	15…20xIn	100	100	50	**KTU7-D-2D-3** ❶
4.0	15…20xIn	100	100	50	**KTU7-D-2D-4** ❶
5.0	15…20xIn	100	100	50	**KTU7-D-2D-5** ❶
6.0	15…20xIn	100	100	50	**KTU7-D-2D-6** ❶
8.0	15…20xIn	100	100	50	**KTU7-D-2D-8** ❶
10.0	15…20xIn	100	100	50	**KTU7-D-2D-10** ❶
12.0	15…20xIn	65	65	25	**KTU7-D-2D-12**
15.0	15…20xIn	65	65	25	**KTU7-D-2D-15**
20.0	15…20xIn	65	65	25	**KTU7-D-2D-20**
25.0	15…20xIn	65	65	25	**KTU7-D-2D-25**
30.0	15…20xIn	65	65	25	**KTU7-D-2D-30**
KTU7-D — High Interrupting Capacity – 3-Pole					
0.5	15…20xIn	100	100	50	**KTU7-D-3D-0.5** ❶
1.0	15…20xIn	100	100	50	**KTU7-D-3D-1** ❶
2.0	15…20xIn	100	100	50	**KTU7-D-3D-2** ❶
3.0	15…20xIn	100	100	50	**KTU7-D-3D-3** ❶
4.0	15…20xIn	100	100	50	**KTU7-D-3D-4** ❶
5.0	15…20xIn	100	100	50	**KTU7-D-3D-5** ❶
6.0	15…20xIn	100	100	50	**KTU7-D-3D-6** ❶
8.0	15…20xIn	100	100	50	**KTU7-D-3D-8** ❶
10.0	15…20xIn	100	100	50	**KTU7-D-3D-10** ❶
12.0	15…20xIn	65	65	25	**KTU7-D-3D-12**
15.0	15…20xIn	65	65	25	**KTU7-D-3D-15**
20.0	15…20xIn	65	65	25	**KTU7-D-3D-20**
25.0	15…20xIn	65	65	25	**KTU7-D-3D-25**
30.0	15…20xIn	65	65	25	**KTU7-D-3D-30**

Description

The KTU7 is a fixed trip, thermal-magnetic UL489 Molded Case Circuit Breaker.

KTU7-D-2D-10

KTU7-D-3D-10

❶ Suitable for continuous operation at 100% of rating only if used in minimum enclosure space of 250 x 175 x 150 mm (10 x 7 x 6 in).
❷ KTU7 has independent thermal elements suitable for power distribution applications (not two slide bar differential tripping).

KT7 Accessories available for KTU7-D

	**KT7-PE1 or KT7-PEF1** **Front Mount Auxiliaries and Trip Contacts** See page F12		**KT7-KN1, KT7-KRY1 or KT7-DS** **Lockable Twist Knob & Locking Tag** See page F16
	KT7-UA or KT7-AA **Undervoltage Trips and Shunt Trips ❶** See page F14		**Handle Assemblies** **KT7-SY or KT7-SB** **KT7-HTN or KT7-HTRY ❷** See page F15
	**KT7-HT/HTL, KT7-S_/N_ & KT7-SHS** **Extension Shafts & Support** See page F15		**KT7-45-AS** **Screw Adaptor** See page F16

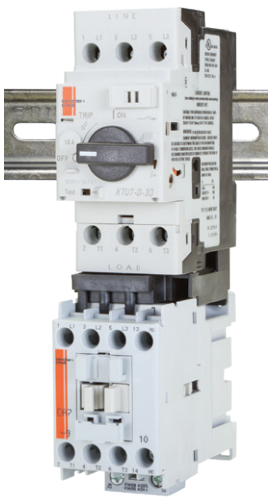

Remote Operation Application
The KTU7 3-Pole unit can be combined with CA7 using Connector Modules to achieve remote operation.
- For CA7-9…23 use KTU7-D-PEC23
- For CA7-9…43 use KTU7-D-PF

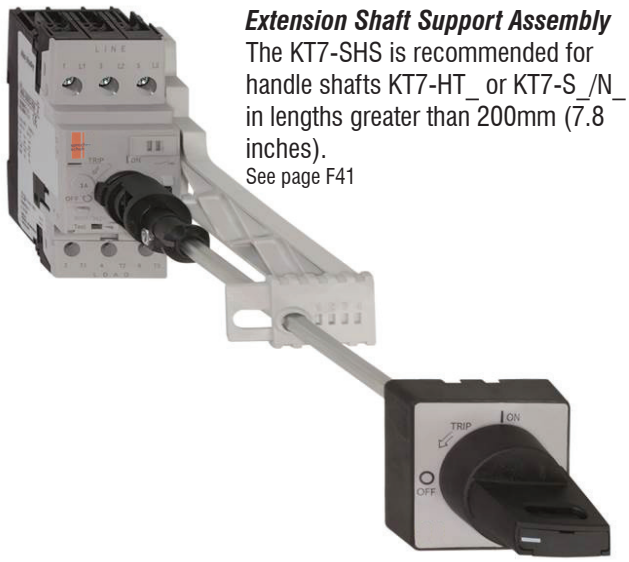

Extension Shaft Support Assembly
The KT7-SHS is recommended for handle shafts KT7-HT_ or KT7-S_/N_ in lengths greater than 200mm (7.8 inches).
See page F41

❶ Series B or later.
❷ Series E or later.

Connecting Modules *(for connecting KTU7 to CA7 AC coil, or CA7 Electronic DC coil contactors)*

Module	Description	For Connecting. . .	To Contactor. . .	Catalog Number
	Connecting Modules • 25 Amp maximum • Provides electrical and mechanical interconnection of KTU7 3-Pole and CA7 (with AC coils) or CA7-_E (with 12V or 24V Electronic DC coils) • KTU7 and Contactor mount on one DIN rail (see previous page for visual)	KTU7-D	CA7-9..23	**KTU7-D-PEC23** ❶
	Flexible Connecting Module • 32 Amp maximum • Provides electrical and mechanical interconnection of KTU7 and CA7 (with AC coils) or CA7-_E (with 12V or 24V Electronic DC coils) • Contactor and KTU7 separately mounted	KTU7-D	CA7-9..43	**KTU7-D-PF** ❶

F

KTU7 Molded Case Circuit Breakers

Compact Busbar System for KTU7-D

Accessory	Description	For Use With	Catalog Number
	**Compact Busbar — 45 mm Spacing (Rated 64 A)** • For use with front-mounted auxiliary contact Connects 2-KTU7s Connects 3-KTU7s Connects 4-KTU7s Connects 5-KTU7s (shown)	KTU7-D-3D ❶	**KTU7-D-DB-45-2** **KTU7-D-DB-45-3** **KTU7-D-DB-45-4** **KTU7-D-DB-45-5**
	Supply Block and Terminal • For power connection to Compact Busbar — 600V, KTU7-D…120A maximum • Top feed — overlaps commoning link • Meets requirements for terminal spacing from source • Compliant with UL489 Terminal Clearance standards	KTU7-D-3D ❶	**KTU7-D-A3E**
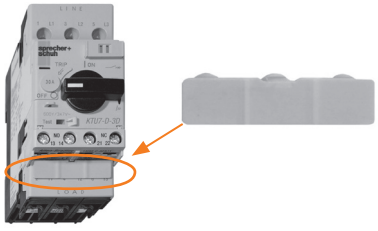	**Load Terminal Cover** • For UL 489 compliance of front mounted auxiliary contacts when installed on KTU7 • The cover packaged in quantities of 10 (must order 10 for one package of 10)	KTU7	**KT7-PEFC**

❶ For use with KTU7 3-pole Circuit Breakers only.

Application Rating Chart

KTU7	High Fault SCCR			Switching Lighting Rated		
	Combined with ❶	480Y/277 VAC (KA)	600Y/347 VAC (KA)	Fluorescent ❷	High-intensity Discharge ❸	HVAC Rated ❹
KTU7-D-2D-0.5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-1	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-2	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-3	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-4	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-6	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-8	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-10	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-12	CA7-9…23	65	35	~	HID	HARC
KTU7-D-2D-15	CA7-9…23	65	35	SWD	HID	HARC
KTU7-D-2D-20	CA7-9…23	65	35	SWD	HID	HARC
KTU7-D-2D-25	CA7-9…30	65	35	~	HID	HARC
KTU7-D-2D-30	CA7-9…30	65	35	~	~	HARC
KTU7-D-3D-0.5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-1	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-2	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-3	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-4	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-5	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-6	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-8	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-10	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-12	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-15	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-20	CA7-9…23	65	35	~	HID	HARC
KTU7-D-3D-25	CA7-9…30	65	35	~	HID	HARC
KTU7-D-3D-30	CA7-9…30	65	35	~	HID	HARC

IEC Performance Data

(CSA C22.2, UL 489, IEC / EN 60947-1, -2 in connection with a short-circuit protection device

			KTU7-D- 2 pole & 3 pole													
			0.5A	1A	2A	3A	4A	5A	6A	8A	10A	12A	15A	20A	25A	30A
Rated Operational Current I_n		[A]	0.5	1	2	3	4	5	6	8	10	12	15	20	25	30
Fixed Thermal Trip $I_r = I_n$		[A]	0.5	1	2	3	4	5	6	8	10	12	15	20	25	30
Fixed Magnetic Trip $I_m =$		[A]	15…20 x I_n													
Ultimate Short Circuit Breaking Capacity (50 Hz) I_{cu}	230…240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100
	400…415V	[kA]	100	100	100	100	100	100	100	100	100	65	65	65	65	65
	525V	[kA]	65	65	65	65	65	65	65	65	65	65	65	65	65	65
	690V	[kA]	50	50	18	18	18	18	18	10	10	10	10	10	10	10
Rated Service Short Circuit Breaking Capacity (50 Hz) I_{cs}	230…240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100
	400…415V	[kA]	65	65	65	65	65	65	65	65	65	50	50	50	50	50
	525V	[kA]	65	65	65	65	65	65	65	65	65	50	50	50	25	25
	690V	[kA]	50	50	10	10	10	10	10	6	6	6	6	6	6	6

❶ KTU7 + CA7-9…23 contactor maybe combined with CEP7 overload. SCCR ratings remain unchanged.
❷ KTU7 circuit breaker intended to switch fluorescent lighting on a regular basis. Selection of sizes limited by UL489. Devices marked with “SWD”.
❸ KTU7 Circuit Breakers intended to switch high-intensity discharge (ballast) lighting devices marked with “HID”.
❹ Rated for use with heating, air conditioning, refrigeration. Devices marked with “HARC”.

General Data

		KTU7-D
Number of Poles		2 and 3
Rated Insulation Voltage U_i		
IEC, / EN	[V]	600
UL, CSA	[V]	600
Ratings		HACR
Suitable for continuous operation at 100% of rating only if used in enclosure space for		0.5…15 A, enclosure space 250 x 175 x 150 mm (10 x 7 x 6 in)
Rated Impulse Withstand Voltage U_{imp}		
Pollution degree		3
Main circuits U_{imp} /Overvoltage Category		6 kV/III
Auxiliary circuits U_{imp} /Overvoltage Category		6 kV/III
Safe separation between main and auxiliary circuits		up to 400V
Rated Frequency	[Hz]	50/60
Utilization Category		
• IEC 60947-2 (Circuit Breaker)		A
Life Span		
Mechanical	[operations]	100,000
Electrical (I_e max.)	[operations]	10,000
Switching Frequency	[operations/h]	max. 25
Ambient Temperature		
Storage	[°C]	-40…+80
Operation	[°C]	-25…+60 (70 with 15% I_n current reduction)
Resistance to Climatic Change		
Moisture / Heat Resistance	(600068-2-30)	23 °C / 83 % relative humidity and 40 °C / 92 % relative humidity, 56 cycles
Dry Heat	(60086-2-2)	100 °C, relative humidity <50 %, 7 days
Moisture / Change Resistance	(60086-2-3)	40 °C, relative humidity 93 %, 56 days
Site Altitude	[m]	to 2000 N.N.
Protection Class		IP2X, when wired
Resistance to Shock	Transport (60068-2-27)	30 g, 11 ms, all axes
Resistance to Vibration	Operation (60068-2-6)	18 g
Overload Protection		
Phase-loss protection		No phase loss protection
Short circuit protection (Magnetic)		Fixed setting 10…20 x I_n
Main Disconnect Switch Application		Yes, with accessories
Application Conditions		For utilization outside North America, Assemblies (of products) shall comply to the IEC61439-1 requirements KTU7 circuit breakers are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments.
Standards		UL489; CSA C22.2 No. 5; IEC / EN 60947-1, -2
Certifications		CE; cULus listed Circuit Breaker, File No. E334037 and E33916 (accessories)

Terminal Specifications

			KTU7-D
Terminal Parts Terminal Type			
Screwdriver			Pozidrive No. 2 / Blade No. 3
	1. conductor	[mm²]/[AWG]	1…6/—
	2. conductor	[mm²]/[AWG]	1…4/—
	1. conductor	[mm²]/[AWG]	1…6/—
	2. conductor	[mm²]/[AWG]	1…6/—
	1. conductor	[mm²]/[AWG]	—/No. 18…10
	2. conductor	[mm²]/[AWG]	—/No. 18…10
	1. conductor	[mm²]/[AWG]	1…6/No. 18…10
	2. conductor	[mm²]/[AWG]	1…6/No. 18…10
Tightening Torque		[N•m]/[lb•in]	2…2.5/18…22
Weight		[g]	395

			KTU7-D-A3E
Use 75 °C Cu wire only			
Rated Thermal Current I_{th}		[A]	64
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
	1. conductor	[mm²]/[AWG]	2.5…25/14…4
Tightening Torque		[N•m]/[lb•in]	3…3.5/27…31

Time-Current Characteristic

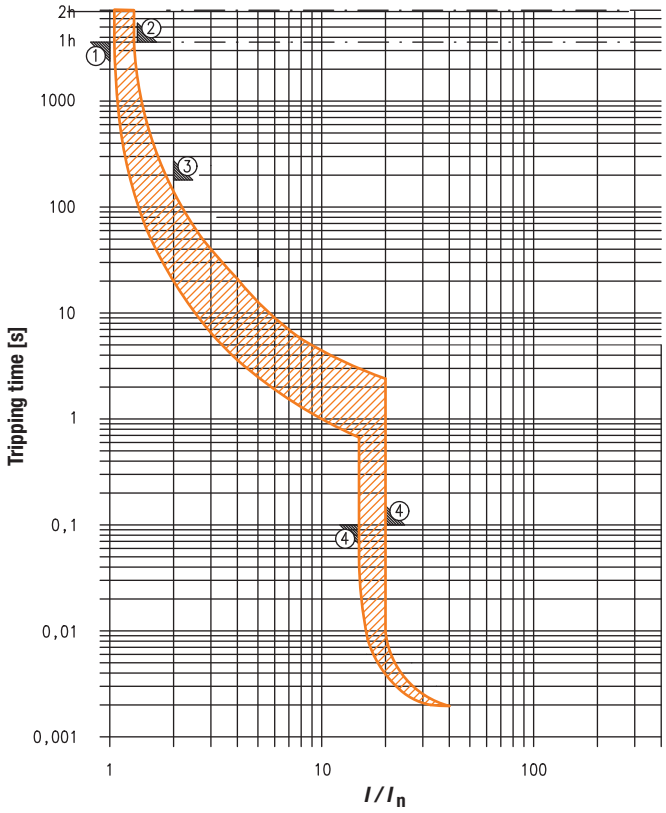

Tripping characteristic
acc. to UL 489 and IEC 60947-2
① conventional non-tripping
current Int = 1.0 In
② conventional tripping current
It = 1.35 In : t = <1h
③ 2.0 In : t = 180s max.

Instantaneous tripping
acc. to UL 489 and IEC 60947-2
④ Trip Curve : 15…20 In

Maximum Cut-off (Let-Through) Current

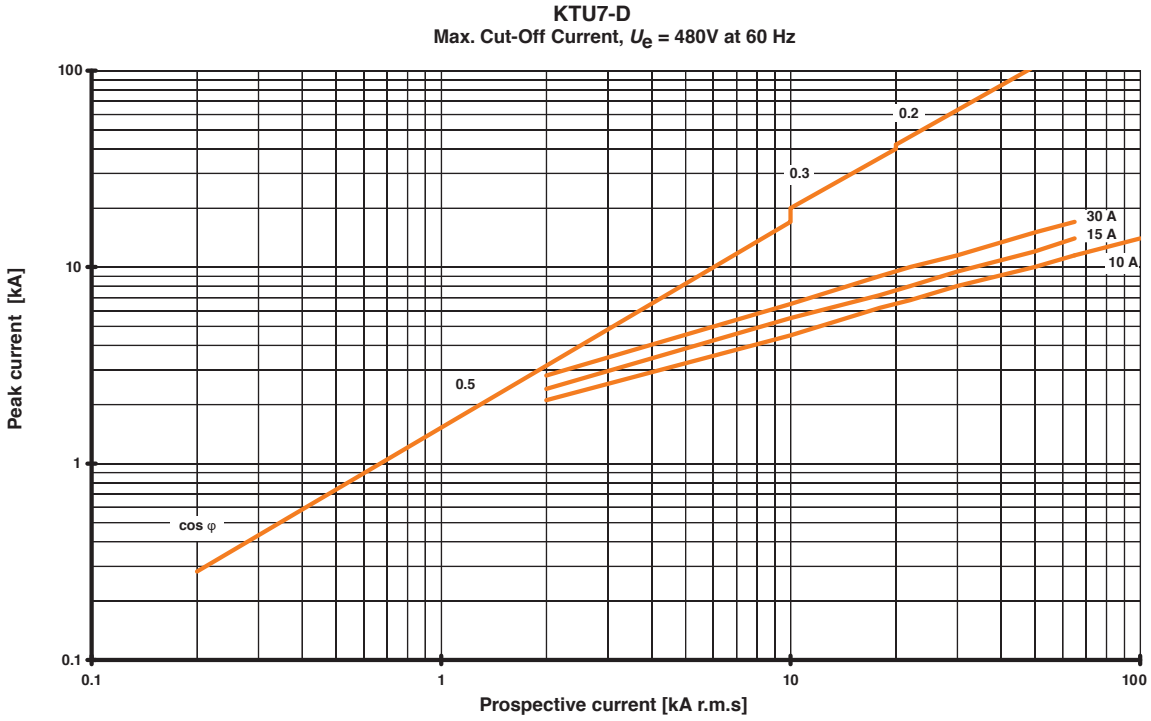

Maximum Let-Through Energy

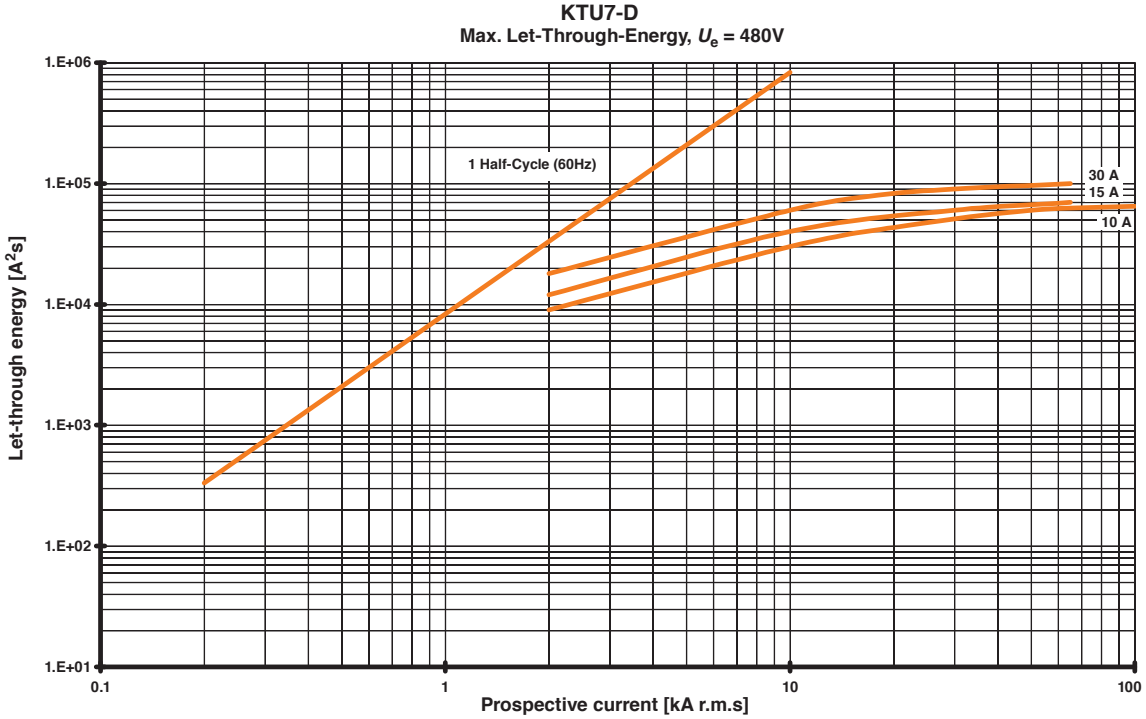

KTU7-D Dimensions

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

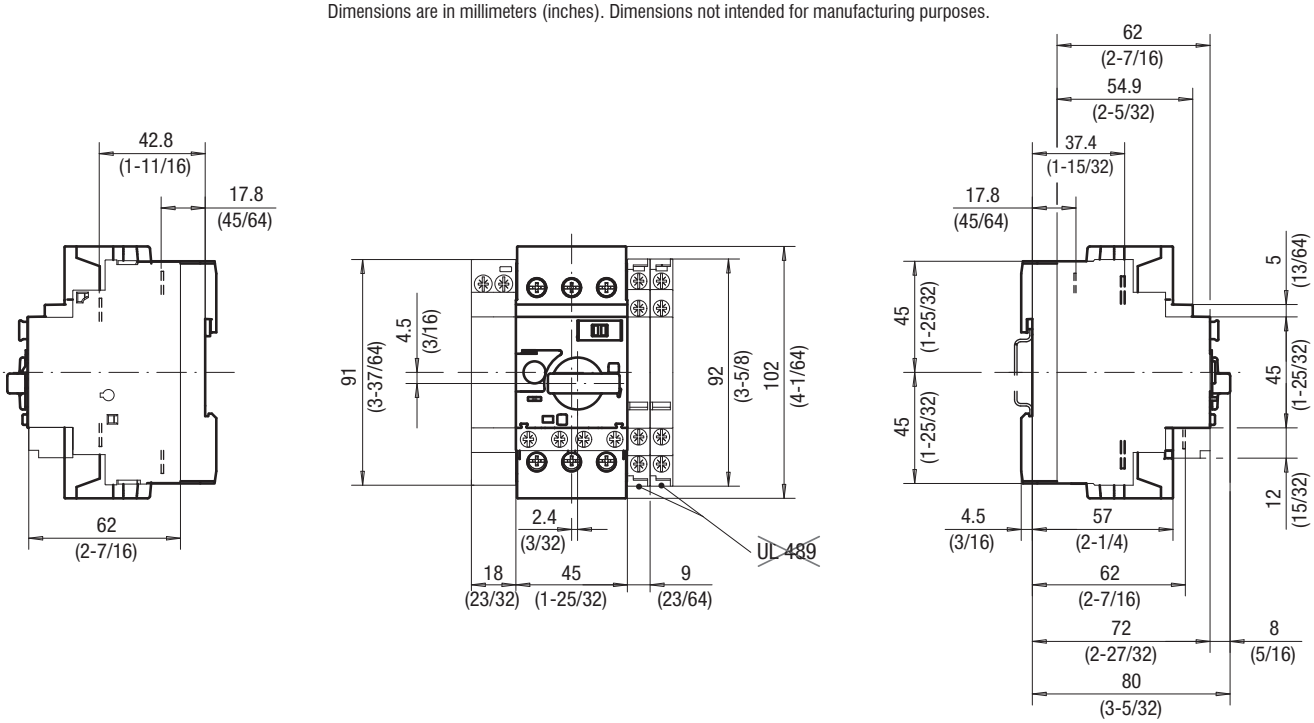

KTU7 Circuit Breaker Enclosure Requirements

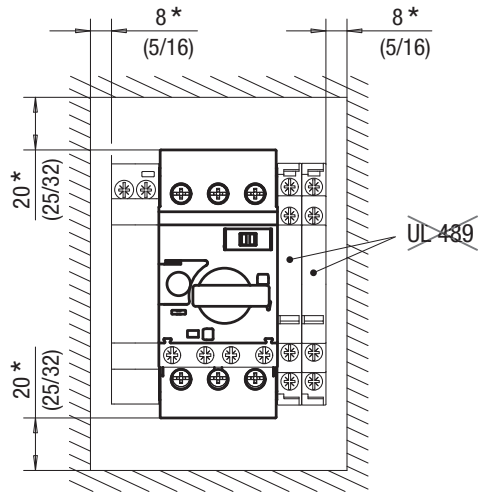

*) - Minimum distance to grounded parts or walls

KTU7 Wiring Diagram

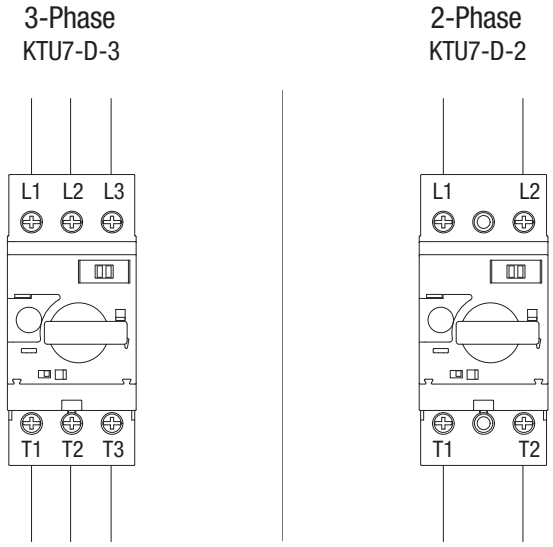

KTU7 with Busbar

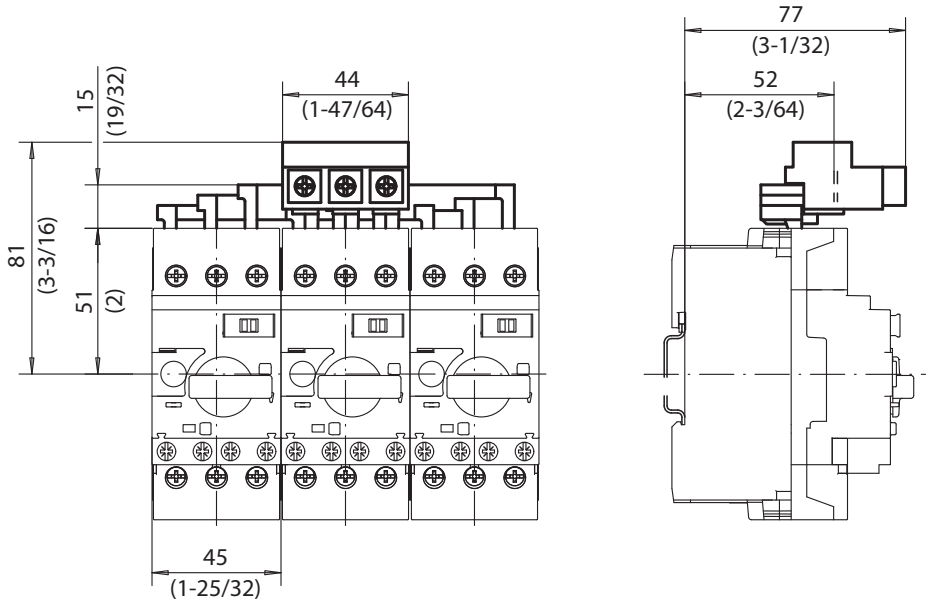

KTU7 with Screw Adaptor KT7-45-AS

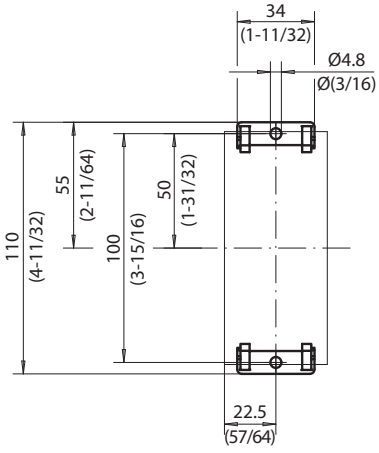

KTU7 Mounting Position

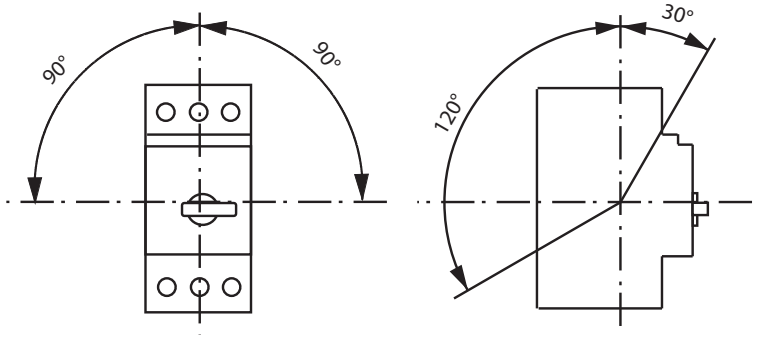

KTU7 Molded Case Circuit Breakers

F

Notes

Ecombo and EcomboPlus Starters

Save space, save money in individual or multi-motor starter applications

Sprecher + Schuh's Ecombo and EcomboPlus starters are the compact alternative to larger and higher priced combination starters. Both models consist of a KTA7 Motor Circuit Controller (cULus listed as a Type E, self-protected combination starter), assembled with a CA7 or CA8 contactor, which provides remote operation (Type E/F). Whether used as a standalone starter or in multi-motor starter applications, Ecombo and EcomboPlus starters save significant panel space and dollars over conventional combination starter alternatives.

CL7 Ecombo starter

CK7 EcomboPlus starter

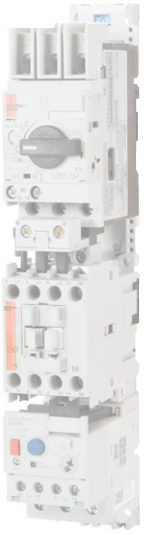

CLT7 Three-Component starter

Section Obsolete
See pages F1.40 - F1.55

See our online white paper

Methods of Applying KT7 Motor Circuit Controllers

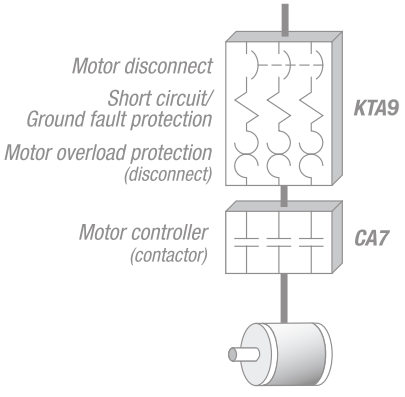

The Ecombo starter line combines a KTA7 self-protected Type E combination controller with a CA7 contactor to form a cost effective compact Type E/F alternative to traditional combination starters.

Control and protection for most industrial applications

The Ecombo starter line covers motors to 45 amperes, while providing current limiting short circuit protection up to 65kA. Class 10 thermal overload protection is also assured with a very accurate current adjustment setting which is factory calibrated to the smallest and largest current the unit can handle. A "differential tripping" mechanism also provides acceleration ramping under single phase conditions (see illustration on page F1.50). Ecombo starters may be selected as Type 2 Coordinated per IEC 60947-4-1, or UL Construction Type E or F.

The Ecombo starter…

Ecombo starters (CL7) come standard with a KTA7 Motor Circuit Controller connected to Sprecher + Schuh's CA7 contactor (or CA8 mini contactor) through a specially designed connection module. The unit is DIN-rail mounted. Contactor coil connections are at the bottom of the starter to provide attractive and cost effective panel wiring. Ecombo starters may also be purchased with just three parts and assembled by the user to further increase economy. The CLT7 is a three component starter with a KTB7 controller, CA7 contactor, and a CEP7 solid state overload relay, pre-assembled on a bus bar module and ready to mount to a DIN rail or panel.

Ecombo*Plus*… the complete solution

The EcomboPlus starter (CK7) is factory assembled on a special socket base that provides support and allows the starter to be mounted on one or two DIN-rails or screw mounted. Each starter comes standard with a front mounted auxiliary trip contact that is pre-wired to a built-in terminal block at the bottom of the unit. Contactor coil connections are also at the bottom of the starter to provide attractive and cost effective panel wiring.

Reduce panel size, complexity and cost

Because KT7 Motor Circuit Controllers are UL listed as self-protected combination starters, NEC / CEC group motor rules are simplified substantially. In many cases, only a non-fused switch is required for panel disconnect. See our online white paper "Methods of Applying KT7 Motor Circuit Controllers", which explains applying KT7s in multi-motor starter applications.

Starter Type

Ecombo*Plus* Starter with CA7

CK7	2 component DOL Starter
CKU7	2 component REV Starter

Ecombo Starter with CA7

CL7	2 component DOL Starter
CLU7	2 component REV Starter
CLT7	3 component DOL Starter
CLUT7	3 component REV Starter

Ecombo Starter with CA8

CL8	2 component DOL Starter
CLU8	2 component REV Starter

Contactor Series

Series CA7 ❶

9(E)
12(E)
16(E)
23(E)
30(E)
37(E)
43(E)

Series CA8

9(C)
12(C)

Auxiliary Contact

01	1 NC
10	1 NO
11	1 NO + 1 NC
02	2 NC
22	2 NO + 2 NC

Control Voltage*

Code	AC Voltage
24Z	24V 50/60Hz
120	110V 50Hz / 120V 60Hz
220W	200…220V 50Hz / 208…240V 60Hz
277	240V 50Hz / 277V 60Hz
480	440V 50Hz / 480V 60Hz
600	550V 50Hz / 600V 60Hz

Code	DC Voltage
12D(E)	12V
24D(E)	24V
48D(E)	48V
110D(E)	110V
220D(E)	220V

* Other control voltages available
(E) designates Electronic DC Coils

This illustration is for reference only.

Section Obsolete
See pages F1.40 - F1.55

Turn to the appropriate page to determine specific catalog number

Circuit Breaker Type

KT..7

A…	Motor Protection
B…	Starter Protection
C…	High Inrush Protection
…S	Standard Performance
…H	High Performance

Adj. Range

0.16A	0.1…0.16A
0.25A	0.16…0.25A
0.4A	0.25…0.4A
0.63A	0.4…0.63A
1A	0.63…1.0A
1.6A	1.0…1.6A
2.5A	1.6…2.5A
4A	2.5…4.0A
6.3A	4.0…6.3A
10A	6.3…10A
16A	10…16A
20A	16…20A
25A	20…25A
32A	25…32A
45A	32…45A

Auxiliaries + Trip Contacts

X	No auxiliary contacts
Front Mounted Auxiliaries	
A10	Aux. Contact 1 NO
A01	Aux. Contact 1 NC
A11	Aux. Contact 1 NO + 1 NC
A20	Aux. Contact 2 NO
T10A01	1 NO Short Circuit or Overload + 1 NC Aux. Contact
T10A10	1 NO Short Circuit or Overload + 1 NO Aux. Contact
Side Mounted Auxiliaries	
AS11	Aux. Contact 1 NO + 1 NC
AS20	Aux. Contact 2 NO
R10	1 NC Short Circuit or Overload + 1 NO Aux. Contact
R11	1 NC Short Circuit or Overload + 1 NC Aux. Contact

Option(s)

For complete listing of **Option Codes,** refer to Modifications page in this section.

❶ (D & E) designations indicate DC coil.

Non-Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1M	~	~	~	~	**CL8-09-10-✱-AS0.16A-X**
0.16...0.25	3.3	2M	~	~	~	~	**CL8-09-10-✱-AS0.25A-X**
0.25...0.40	5.2	3M	~	~	~	~	**CL8-09-10-✱-AS0.4A-X**
0.40...0.63	8.2	4M	~	~	~	~	**CL8-09-10-✱-AS0.63A-X**
0.63...1	13	5M	~	~	~	1/2	**CL8-09-10-✱-AS1A-X**
1...1.6	21	6M	~	~	1/2	3/4	**CL8-09-10-✱-AS1.6A-X**
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	**CL8-09-10-✱-AS2.5A-X**
2.5...4	52	8M	3/4	3/4	2	3	**CL8-09-10-✱-AS4A-X**
4...6.3	82	9M	1	1-1/2	3	~	**CL8-09-10-✱-AS6.3A-X**
6.3...10	130	10M	2	2	5	~	**CL8-09-10-✱-AS10A-X**
6.3…10	130	11M	~	3	~	~	**CL8-12-10-✱-AS10A-X**
10…16	208	12M	3	~	7-1/2	~	**CL8-12-10-✱-AS16A-X**

Non-Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1M	~	~	~	~	**CL8-09C-10-✱-AS0.16A-X**
0.16...0.25	3.3	2M	~	~	~	~	**CL8-09C-10-✱-AS0.25A-X**
0.25...0.40	5.2	3M	~	~	~	~	**CL8-09C-10-✱-AS0.4A-X**
0.40...0.63	8.2	4M	~	~	~	~	**CL8-09C-10-✱-AS0.63A-X**
0.63...1	13	5M	~	~	~	1/2	**CL8-09C-10-✱-AS1A-X**
1...1.6	21	6M	~	~	1/2	3/4	**CL8-09C-10-✱-AS1.6A-X**
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	**CL8-09C-10-✱-AS2.5A-X**
2.5...4	52	8M	3/4	3/4	2	~	**CL8-09C-10-✱-AS4A-X**
4...6.3	82	9M	1	1-1/2	3	~	**CL8-09C-10-✱-AS6.3A-X**
6.3...10	130	10M	2	2	5	~	**CL8-09C-10-✱-AS10A-X**
6.3…10	130	11M	~	3	~	~	**CL8-12C-10-✱-AS10A-X**
10…16	208	12M	3	~	7-1/2	~	**CL8-12C-10-✱-AS16A-X**

Section Obsolete
See pages F1.40 - F1.55

Includes:

- KTA7-25S (Standard Interrupting Capacity) Motor Controller
- CA8 Contactor
- Connecting Module (Cat.# KT7-25S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT7-25-TE1)
- Can mount on one DIN-rail

AC Coil Codes ❸

AC Coil Code	Voltage Range 50 Hz	60 Hz
12	12V	12V
24Z	**24V**	**24V**
48Z	48V	48V
120	**110V**	**120V**
208	200V-220V	200V-220V
240	240V	240V
380 ❺	Use Coil Code 400	
400 ❺	400V	400V
480	**440V**	**480V**
575 ❻	Use Coil Code 600	
600 ❻	525V	600V

DC Coil Codes ❸

DC Coil Code	Voltage
12D	12V
24D	**24V** ❹
110D	110V
125D	125V
220D	220V

Horsepower ratings shown in the tables are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.
❸ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
❹ Integrated surge suppressor for coil is available. See page F69 for options.
❺ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
❻ Use this code for 575V applications.

Reversing Ecombo Starters with AC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1M	~	~	~	~	CLU8-09-02-✱-AS0.16A-X
0.16...0.25	3.3	2M	~	~	~	~	CLU8-09-02-✱-AS0.25A-X
0.25...0.40	5.2	3M	~	~	~	~	CLU8-09-02-✱-AS0.4A-X
0.40...0.63	8.2	4M	~	~	~	~	CLU8-09-02-✱-AS0.63A-X
0.63...1	13	5M	~	~	~	1/2	CLU8-09-02-✱-AS1A-X
1...1.6	21	6M	~	~	1/2	3/4	CLU8-09-02-✱-AS1.6A-X
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	CLU8-09-02-✱-AS2.5A-X
2.5...4	52	8M	3/4	3/4	2	3	CLU8-09-02-✱-AS4A-X
4...6.3	82	9M	1	1-1/2	3	~	CLU8-09-02-✱-AS6.3A-X
6.3...10	130	10M	2	2	5	~	CLU8-09-02-✱-AS10A-X
6.3...10	130	11M	~	3	~	~	CLU8-12-02-✱-AS10A-X
10…16	208	12M	3	~	7-1/2	~	CLU8-12-02-✱-AS16A-X

Reversing Ecombo Starters with DC Coil, Series CA8 Contactor

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1M	~	~	~	~	CLU8-09C-02-✱-AS0.16A-X
0.16...0.25	3.3	2M	~	~	~	~	CLU8-09C-02-✱-AS0.25A-X
0.25...0.40	5.2	3M	~	~	~	~	CLU8-09C-02-✱-AS0.4A-X
0.40...0.63	8.2	4M	~	~	~	~	CLU8-09C-02-✱-AS0.63A-X
0.63...1	13	5M	~	~	~	1/2	CLU8-09C-02-✱-AS1A-X
1...1.6	21	6M	~	~	1/2	3/4	CLU8-09C-02-✱-AS1.6A-X
1.6...2.5	33	7M	1/2	1/2	1	1-1/2	CLU8-09C-02-✱-AS2.5A-X
2.5...4	52	8M	3/4	3/4	2	3	CLU8-09C-02-✱-AS4A-X
4...6.3	82	9M	1	1-1/2	3	~	CLU8-09C-02-✱-AS6.3A-X
6.3...10	130	10M	2	2	5	~	CLU8-09C-02-✱-AS10A-X
6.3...10	130	11M	~	3	~	~	CLU8-12C-02-✱-AS10A-X
10…16	208	12M	3	~	7-1/2	~	CLU8-12C-02-✱-AS16A-X

Section Obsolete
See pages F1.40 - F1.55

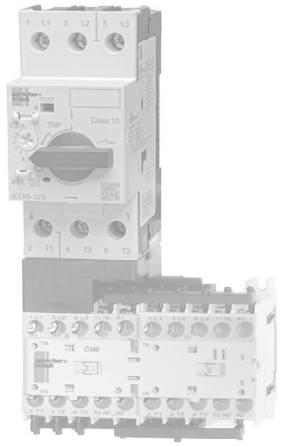

Includes:

- KTA7-25S (Standard Interrupting Capacity) Motor Controller
- One Reversing CAU8 Contactor with Mechanical Interlock (CM8)
- Connecting Module (Cat.# KT7-25S-PEK12)
- Terminal Adaptor for Type F Applications (Cat.# KT7-25-TE1)
- Reversing Power Wiring Kit (Cat.# CAUT8-PW)
- Can mount on one DIN-rail

AC Coil Codes ❸

AC Coil Code	Voltage Range 50 Hz	60 Hz
12	12V	12V
24Z	**24V**	**24V**
48Z	48V	48V
120	**110V**	**120V**
208	200V-220V	200V-220V
240	240V	240V
380 ❺	Use Coil Code 400	
400 ❺	400V	400V
480	**440V**	**480V**
575 ❻	Use Coil Code 600	
600 ❻	525V	600V

DC Coil Codes ❸

DC Coil Code	Voltage
12D	12V
24D	**24V ❹**
110D	110V
125D	125V
220D	220V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Does not include auxiliary contacts. See Factory Options on page F69 for additional auxiliary contact configurations.
❸ The coil codes shown are the most commonly stocked items. Contact your Sprecher + Schuh representative if special voltages are required.
❹ Integrated surge suppressor for coil is available. See page F69 for options.
❺ The European Community has agreed that 400V is the nominal voltage in lieu of 380V. Use this code when 380V is required.
❻ Use this code for 575V applications.

Non-Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1	~	~	~	~	**CL7-9-10-✱-AS0.16A-A10**
0.16...0.25	3.3	2	~	~	~	~	**CL7-9-10-✱-AS0.25A-A10**
0.25...0.40	5.2	3	~	~	~	~	**CL7-9-10-✱-AS0.4A-A10**
0.40...0.63	8.2	4	~	~	~	~	**CL7-9-10-✱-AS0.63A-A10**
0.63...1	13	5	~	~	~	1/2	**CL7-9-10-✱-AS1A-A10**
1...1.6	21	6	~	~	1/2	3/4	**CL7-9-10-✱-AS1.6A-A10**
1.6...2.5	33	7	1/2	1/2	1	1-1/2	**CL7-9-10-✱-AS2.5A-A10**
2.5...4	52	8	3/4	3/4	2	3	**CL7-9-10-✱-AS4A-A10**
4...6.3	82	9	1	1-1/2	3	5 ❺	**CL7-9-10-✱-AS6.3A-A10** ❺
6.3...10	130	11	2	3	5	7-1/2 ❺	**CL7-12-10-✱-AS10A-A10** ❺
10...16	208	12	3	5	10	10 ❺	**CL7-16-10-✱-AS16A-A10** ❺
14.5...20	260	15	5	5	10	15 ❺	**CL7-23-10-✱-AS20A-A10** ❺
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	**CL7-23-10-✱-AS25A-A10** ❺
KTA7-25H — High Interrupting Capacity							
1.6...2.5	33	17	1/2	1/2	1	1-1/2	**CL7-9-10-✱-AH2.5A-A10**
2.5...4	52	19	3/4	3/4	2	3	**CL7-9-10-✱-AH4A-A10**
4...6.3	82	22	1	1-1/2	3	5	**CL7-9-10-✱-AH6.3A-A10**
6.3...10	130	24	2	3	5	7-1/2	**CL7-12-10-✱-AH10A-A10**
10...16	208	28	3	5	10	10	**CL7-16-10-✱-AH16A-A**
14.5...20	260	31	5	5	10	15 ❺	**CL7-23-10-✱-AH20A-A10** ❺
18...25	325	33	5	7-1/2	15	20 ❺	**CL7-23-10-✱-AH25A-A10** ❺
KTA7-45H — High Interrupting Capacity ❸							
6.3…10	130	36	2	3	5		**CL7-30-10-✱-AH10A-A10-W**
10…16	208	37	3	5	10		**CL7-30-10-✱-AH16A-A10-W**
14.5…20	260	38				15	**CL7-30-10-✱-AH20A-A10-W**
18…25	325	39	7-1/2		15	20	**CL7-30-10-✱-AH25A-A10-W**
23...32	416	41	7-1/2	10	20		**CL7-30-10-✱-AH32A-A10-W**
32…45	585	45	10	10			**CL7-37-10-✱-AH45A-A10-W**
32…45	585	46	10	15			**CL7-43-11-✱-AH45A-A10-W** ❹

For applications above 45 amps please consider our type C combination starters on page C59.

Section Obsolete
See pages F1.40 - F1.55

CL7-16-10-AS16A-A10

Includes:

- KT7 Motor Controller with 1 NO Auxiliary Contact
- CA7 Contactor (AC)
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ❸

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes (✱) ❷

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
277	240V	277V
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor name-plate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ CL7-30…43 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❹ CL7-43 supplied with (1) NO and (1) NC front mount auxiliary.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A10 uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change suffix –A10 to –AS11 (example CL7-9-10-✱-AS0.16A-**AS11**) See options on page F69.

Non-Reversing Ecombo Starters with Electronic DC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1	~	~	~	~	CL7-9E-10-✱-AS0.16A-A10
0.16...0.25	3.3	2	~	~	~	~	CL7-9E-10-✱-AS0.25A-A10
0.25...0.40	5.2	3	~	~	~	~	CL7-9E-10-✱-AS0.4A-A10
0.40...0.63	8.2	4	~	~	~	~	CL7-9E-10-✱-AS0.63A-A10
0.63...1	13	5	~	~	~	1/2	CL7-9E-10-✱-AS1A-A10
1...1.6	21	6	~	~	1/2	3/4	CL7-9E-10-✱-AS1.6A-A10
1.6...2.5	33	7	1/2	1/2	1	1-1/2	CL7-9E-10-✱-AS2.5A-A10
2.5...4	52	8	3/4	3/4	2	3	CL7-9E-10-✱-AS4A-A10
4...6.3	82	9	1	1-1/2	3	5 ❻	CL7-9E-10-✱-AS6.3A-A10 ❻
6.3...10	130	11	2	3	5	7-1/2 ❻	CL7-12E-10-✱-AS10A-A10 ❻
10...16	208	12	3	5	10	10 ❻	CL7-16E-10-✱-AS16A-A10 ❻
14.5...20	260	15	5	5	10	15 ❻	CL7-23E-10-✱-AS20A-A10 ❻
18.5...25	325	16	5 ❻	7-1/2 ❻	15 ❻	20 ❻	CL7-23E-10-✱-AS25A-A10 ❻
KTA7-25H — High Interrupting Capacity							
1.6...2.5	33	17	1/2	1/2	1	1-1/2	CL7-9E-10-✱-AH2.5A-A10
2.5...4	52	19	3/4	3/4	2	3	CL7-9E-10-✱-AH4A-A10
4...6.3	82	22	1	1-1/2	3	5	CL7-9E-10-✱-AH6.3A-A10
6.3...10	130	24	2	3	5	7-1/2	CL7-12E-10-✱-AH10A-A10
10...16	208	28	3	5	10	10	CL7-16E-10-✱-AH16A-A10
14.5...20	260	31	5	5	10	15 ❻	CL7-23E-10-✱-AH20A-A10
18...25	325	33	5	7-1/2	15	20 ❻	CL7-23E-10-✱-AH25A-A10 ❻
KTA7-45H — High Interrupting Capacity ❹							
6.3…10	130	36	2	3	5	7-1/2	CL7-30E-10-✱-AH10A-A10-W
10…16	208	37	3	5	10	10	CL7-30E-10-✱-AH16A-A10-W
14.5…20	260	38	5	5	15	15	CL7-30E-10-✱-AH20A-A10-W
18…25	325	39	7-1/2	7-1/2	15	20	CL7-30E-10-✱-AH25A-A10-W
23...32	416	41	7-1/2	10	20	25	CL7-30E-10-✱-AH32A-A10-W
32…45	585	43	10	10	25	30	CL7-37E-10-✱-AH45A-A10-W
32…45	585	46	10	15	30	30	CL7-43E-11-✱-AH45A-A10-W ❺

For applications above 45 amps please consider open type combination starters on page C59

Section Obsolete
See pages F1.40 - F1.55

CL7-23E-10-24E-AS25A-A10

Includes:
- KT7 Motor Controller with 1 NO Auxiliary Contact
- CA7-9E...43E Contactor
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Can mount on one DIN-rail

Optional: ❸
- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes ❷

DC Coil Codes	Voltage
12E	12V
24E	24V
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Horsepower ratings shown in the tables are for reference only.
The final selection of the controller depends on the actual motor full load current and service factor.
- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ CL7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
❸ See Section A for limitations on adding auxiliaries to Electronic DC Coil contacts.
❹ CL7-30E…43E with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17. To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❺ CL7-43E supplied with (1) NO and (1) NC front mount auxiliary.
❻ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Reversing Ecombo Starters with AC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1	~	~	~	~	CLU7-9-22-✱-AS0.16A-A10
0.16...0.25	3.3	2	~	~	~	~	CLU7-9-22-✱-AS0.25A-A10
0.25...0.40	5.2	3	~	~	~	~	CLU7-9-22-✱-AS0.4A-A10
0.40...0.63	8.2	4	~	~	~	~	CLU7-9-22-✱-AS0.63A-A10
0.63...1	13	5	~	~	~	1/2	CLU7-9-22-✱-AS1A-A10
1...1.6	21	6	~	~	1/2	3/4	CLU7-9-22-✱-AS1.6A-A10
1.6...2.5	33	7	1/2	1/2	1	1-1/2	CLU7-9-22-✱-AS2.5A-A10
2.5...4	52	8	3/4	3/4	2	3	CLU7-9-22-✱-AS4A-A10
4...6.3	82	9	1	1-1/2	3	5 ❺	CLU7-9-22-✱-AS6.3A-A10 ❺
6.3...10	130	11	2	3	5	7-1/2 ❺	CLU7-12-22-✱-AS10A-A10 ❺
10...16	208	12	3	5	10	10 ❺	CLU7-16-22-✱-AS16A-A10 ❺
14.5...20	260	15	5	5	10	15 ❺	CLU7-23-22-✱-AS20A-A10 ❺
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	CLU7-23-22-✱-AS25A-A10 ❺
KTA7-25H — High Interrupting Capacity							
1.6...2.5	33	17	1/2	1/2	1	1-1/2	CLU7-9-22-✱-AH2.5A-A10
2.5...4	52	19	3/4	3/4	2	3	CLU7-9-22-✱-AH4A-A10
4...6.3	82	22	1	1-1/2	3	5	CLU7-9-22-✱-AH6.3A-A10
6.3...10	130	24	2	3	5	7-1/2	CLU7-12-22-✱-AH10A-A10
10...16	208	28	3	5	10	10	CLU7-16-22-✱-AH16A-A10
14.5...20	260	31	5	5	10	15 ❺	CLU7-23-22-✱-AH20A-A10 ❺
18...25	325	33	5	7-1/2	15	20 ❺	CLU7-23-22-✱-AH25A-A10 ❺
KTA7-45H — High Interrupting Capacity ❸							
6.3…10	130	36	2	3	5		CLU7-30-22-✱-AH10A-A10-W
10…16	208	37	3	5	10		CLU7-30-22-✱-AH16A-A10-W
14.5…20	260	38	5	5	10	15	CLU7-30-22-✱-AH20A-A10-W
18…25	325	39	7-1/2	7-1/2	15	20	CLU7-30-22-✱-AH25A-A10-W
23...32	416	41	7-1/2	10	20	25	CLU7-30-22-✱-AH32A-A10-W
32…45	585	45	10	10	25	30	CLU7-37-22-✱-AH45A-A10-W
32…45	585	46	10	15	30	40	CLU7-43-22-✱-AH45A-A10-W ❹

Section Obsolete
See pages F1.40 - F1.55

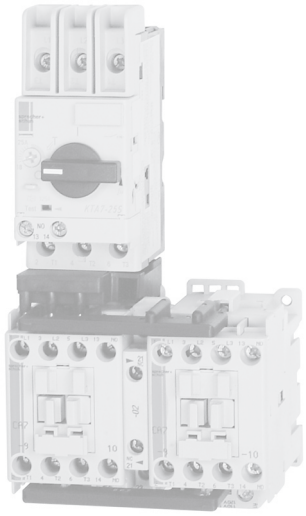

CLU7-9-22-120-AS25A-A10

Includes:
- KT7 Motor Controller with 1 NO Auxiliary Contact
- Two CA7 Contactors (AC)
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ❸
- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes (✱) ❷

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
277	240V	277V
415	400-415V	~
480 ❻	**440V**	**480V**
600 ❻	550V	600V

Horsepower ratings shown in the tables are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ CLU7-30…43 with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17 To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❹ CLU7-43 supplied with (1) NO and (1) NC front mount auxiliary per contactor.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A10 uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change suffix –A10 to –AS11 (example CLU7-9-22-✱-AS0.16A-**AS11**) See options on page F69.

Reversing Ecombo Starters with Electronic DC Coil, Series CA7 Contactor ❸

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1	~	~	~	~	CLU7-9E-22-✱-AS0.16A-A10
0.16...0.25	3.3	2	~	~	~	~	CLU7-9E-22-✱-AS0.25A-A10
0.25...0.40	5.2	3	~	~	~	~	CLU7-9E-22-✱-AS0.4A-A10
0.40...0.63	8.2	4	~	~	~	~	CLU7-9E-22-✱-AS0.63A-A10
0.63...1	13	5	~	~	~	1/2	CLU7-9E-22-✱-AS1A-A10
1...1.6	21	6	~	~	1/2	3/4	CLU7-9E-22-✱-AS1.6A-A10
1.6...2.5	33	7	1/2	1/2	1	1-1/2	CLU7-9E-22-✱-AS2.5A-A10
2.5...4	52	8	3/4	3/4	2	3	CLU7-9E-22-✱-AS4A-A10
4...6.3	82	9	1	1-1/2	3	5 ❻	CLU7-9E-22-✱-AS6.3A-A10 ❻
6.3...10	130	11	2	3	5	7-1/2 ❻	CLU7-12E-22-✱-AS10A-A10 ❻
10...16	208	12	3	5	10	10 ❻	CLU7-16E-22-✱-AS16A-A10 ❻
14.5...20	260	15	5	5	10	15 ❻	CLU7-23E-22-✱-AS20A-A10 ❻
18.5...25	325	16	5 ❻	7-1/2 ❻	15 ❻	20 ❻	CLU7-23E-22-✱-AS25A-A10 ❻
KTA7-25H — High Interrupting Capacity							
1.6...2.5	33	17	1/2	1/2	1	1-1/2	CLU7-9E-22-✱-AH2.5A-A10
2.5...4	52	19	3/4	3/4	2	3	CLU7-9E-22-✱-AH4A-A10
4...6.3	82	22	1	1-1/2	3	5	CLU7-9E-22-✱-AH[illegible]
6.3...10	130	24	2	3	5	7-1/2	CLU7-12E-22-✱-[illegible]A-A10
10...16	208	28	3	5	10	[illegible]	[illegible]E-22-✱-AH16A-A10
14.5...20	260	31	5	5	10	15	CLU7-23E-22-✱-AH20A-A10 ❻
18...25	325	33	5	7-1/2	[illegible]	20 ❻	CLU7-23E-22-✱-[illegible]5A-A10 ❻
KTA7-45[illegible] — [illegible]terrupting Capacity ❹							
6.3…10	130	3[illegible]	[illegible]	[illegible]	5	7-1/2	CLU7-30E-22-✱-AH10A-A10-W
10…16	208	37	[illegible]	5	10	10	CLU7-30E-22-✱-AH16A-A10-W
14.5…20	260	38	5	5	10	[illegible]	CLU7-30E-22-✱-AH20A-A10-W
18…25	325	39	7-1/2	7-1/2	[illegible]	20	CLU7-30E-22-✱-AH25A-A10-W
23...32	416	41	7-1/2	[illegible]	[illegible]	25	CLU7-30E-22-✱-AH32A-A10-W
32…45	585	45	[illegible]0	10	25	30	CLU7-37E-22-✱-AH45A-A10-W
32…45	585	[illegible]	10	15	30	30	CLU7-43E-22-✱-AH45A-A10-W ❺

Section Obsolete
See pages F1.40 - F1.55

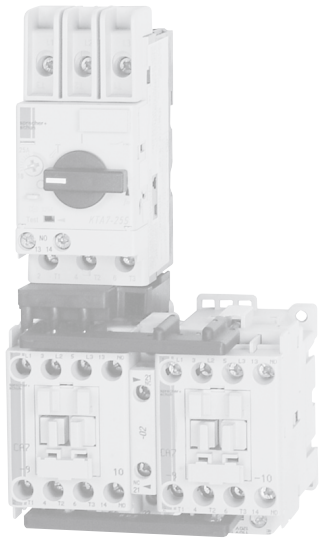

CLU7-9E-22-24E-AS25A-A10

Includes:

- KT7 Motor Controller with [illegible] NO Auxiliary Contact
- [illegible]wo CA7-9E...43E Contactors
- Connecting Module (Cat.# KT7-25[S or H]-PEC23)
- Terminal Adaptor for Type E/F Applications
- Reversing Power Wiring Kit (Cat.# CAUT7-PW23)
- Electrical / Mechanical Interlock
- Can mount on one DIN-rail

Optional: ❸

- Type W Mounting Module is optional on 25S & 25H. Type W Module is standard on 45H models. See modifications on page F69.

Coil Codes ❷

DC Coil Codes	Voltage
12E	12V
24E	24V
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Horsepower ratings shown in the tables are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ CLU7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
❸ See Section A for limitations on adding auxiliaries to Electronic DC Coil contacts.
❹ CLU7-30E…43E with KTA7-45H include Type W Mounting Modules for 35mm or 70mm DIN rail or Panel Mounting as necessary from page F17 To add Type W Mounting Modules for 25S or 25H models add **-W** to end of catalog number. See page F69 for modifications.
❺ CLU7-43E supplied with (1) NO and (1) NC front mount auxiliary per contactor.
❻ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Non-Reversing EcomboPlus Starters with AC Coil, Series CA7 Contactors

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1	~	~	~	~	CK7-9-10-✱-AS0.16A-A11
0.16...0.25	3.3	2	~	~	~	~	CK7-9-10-✱-AS0.25A-A11
0.25...0.40	5.2	3	~	~	~	~	CK7-9-10-✱-AS0.4A-A11
0.40...0.63	8.2	4	~	~	~	~	CK7-9-10-✱-AS0.63A-A11
0.63...1	13	5	~	~	~	1/2	CK7-9-10-✱-AS1A-A11
1...1.6	21	6	~	~	1/2	3/4	CK7-9-10-✱-AS1.6A-A11
1.6...2.5	33	7	1/2	1/2	1	1-1/2	CK7-9-10-✱-AS2.5A-A11
2.5...4	52	8	3/4	3/4	2	3	CK7-9-10-✱-AS4A-A11
4...6.3	82	9	1	1-1/2	3	5 ❺	CK7-9-10-✱-AS6.3A-A11 ❺
6.3...10	130	11	2	3	5	7-1/2 ❺	CK7-12-10-✱-AS10A-A11 ❺
10...16	208	12	3	5	10	10 ❺	CK7-16-10-✱-AS16A-A11 ❺
14.5...20	260	15	5	5	10	15 ❺	CK7-23-10-✱-AS20A-A11 ❺
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	CK7-23-10-✱-AS25A-A11 ❺
KTA7-25H — High Interrupting Capacity							
1.6...2.5	33	17	1/2	1/2	1	1-1/2	CK7-9-10-✱-AH2.5A-A11
2.5...4	52	19	3/4	3/4	2	3	CK7-9-10-✱-AH4A-A11
4...6.3	82	22	1	1-1/2	3	5	CK7-9-10-✱-AH6.3A-A11
6.3...10	130	24	2	3	5	7-1/2	CK7-12-10-✱-AH10A-A11
10...16	208	28	3	5	10	10	CK7-16-10-✱-AH16A-A11
14.5...20	260	31	5	5	10	15 ❺	CK7-23-10-✱-AH20A-A11 ❺
18...25	325	33	5	7-1/2	15	20	CK7-23-10-✱-AH25A-A11
KTA7-45H — High Interrupting Capacity							
6.3…10	130	36	2	3	5	7-1/2	CK7-12-11-✱-AH10A-A11
10....16	208	37	3	5	10	10	CK7-16-11-✱-AH16A-A11
14.5...20	260	38	5	5	10	15	CK7-30-11-✱-AH20A-A11
18…25	325	39	7-1/2	7-1/2	15	20	CK7-30-11-✱-AH25A-A11
23…32	416	41	7-1/2	10	20	25	CK7-30-11-✱-AH32A-A11
32…45	585	45	10	10	25	30	CK7-37-11-✱-AH45A-A11
32…45	585	46	10	15	30	30	CK7-43-11-✱-AH45A-A11

For applications above 45 amps please consider open type combination starters on page C59.

Section Obsolete
See pages F1.40 - F1.55

Description ❸

The EcomboPlus starter is a factory assembly consisting of a KT7 controller with 1 NO - 1 NC auxiliary and a CA7 contactor housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. Terminal Adaptor (Cat.# KT7-25-TE1 or KT7-45-TE) is also included for Type E applications.

Coil Codes (✱) ❹❻

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	**110V**	**120V**
220W	**200V-220V**	**208V-240V**
277	240V	277V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ See Factory Options on page F69 for additional auxiliary contact configurations.
- KT7 supplied with (1) NO and (1) NC auxiliary contact
- CK7-9…23 supplied with (1) NO auxiliary contact
- CK7-30…37 supplied with (1) NO and (1) NC side mount auxiliary contact
- CK7-43 supplied with (1) NO and (1) NC front mount auxiliary contact

❸ Mounting Options:
- Screw Fixing
- Snap Fixing on (1) or (2) 35 mm DIN Rails
- Snap Fixing on (1) 75 mm DIN Rail

❹ Other voltages available, see Section A in this catalog.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A11 uses front-mount KT7-PE1-11 300 VAC maximum control circuit. This assembly is not applicable with control circuits greater than 300 VAC.

F

ECombo Circuit Controllers

Non-Reversing EcomboPlus Starters with Electronic DC Coil, Series CA7 Contactors ❹❺

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1	~	~	~	~	CK7-9E-10-✱-AS0.16A-A11
0.16...0.25	3.3	2	~	~	~	~	CK7-9E-10-✱-AS0.25A-A11
0.25...0.40	5.2	3	~	~	~	~	CK7-9E-10-✱-AS0.4A-A11
0.40...0.63	8.2	4	~	~	~	~	CK7-9E-10-✱-AS0.63A-A11
0.63...1	13	5	~	~	~	1/2	CK7-9E-10-✱-AS1A-A11
1...1.6	21	6	~	~	1/2	3/4	CK7-9E-10-✱-AS1.6A-A11
1.6...2.5	33	7	1/2	1/2	1	1-1/2	CK7-9E-10-✱-AS2.5A-A11
2.5...4	52	8	3/4	3/4	2	3	CK7-9E-10-✱-AS4A-A11
4...6.3	82	9	1	1-1/2	3	5 ❻	CK7-9E-10-✱-AS6.3A-A11 ❻
6.3...10	130	11	2	3	5	7-1/2 ❻	CK7-12E-10-✱-AS10A-A11 ❻
10...16	208	12	3	5	10	10 ❻	CK7-16E-10-✱-AS16A-A11 ❻
14.5...20	260	15	5	5	10	15 ❻	CK7-23E-10-✱-AS20A-A11 ❻
18.5...25	325	16	5 ❻	7-1/2 ❻	15 ❻	20 ❻	CK7-23E-10-✱-AS25A-A11 ❻
KTA7-25H — High Interrupting Capacity							
1.6...2.5	33	17	1/2	1/2	1	1-1/2	CK7-9E-10-✱-AH2.5A-A11
2.5...4	52	19	3/4	3/4	2	3	CK7-9E-10-✱-AH4A-A11
4...6.3	82	22	1	1-1/2	3	5	CK7-9E-10-✱-AH6.3A-A11
6.3...10	130	24	2	3	5	7-1/2	CK7-12E-10-✱-AH10A-A11
10...16	208	28	3	5	10	10	CK7-16E-10-✱-AH16A-A11
14.5...20	260	31	5	5	10	15 ❻	CK7-23E-10-✱-AH20A-A11 ❻
18...25	325	33	5	7-1/2	15	20 ❻	CK7-23E-10-✱-AH25A-A11 ❻
KTA7-[illegible]H — High Interrupting Capacity							
6.3…10	130	37	2	3	5	7-1/2	CK7-12E-11-✱-AH10A-A11
10....16	208	37	3	5	10	10	CK7-30E-11-✱-AH16A-A11
14.5...20	260	38	5	5	10	15	CK7-30E-11-✱-AH20A-A11
18…25	325	39	7-1/2	10	15	20	CK7-30E-11-✱-AH25A-A11
23…32	416	41	10	10	20	25	CK7-30E-11-✱-AH32A-A11
32…45	585	44	10	10	25	30	CK7-37E-11-✱-AH45A-A11
32…45	585	45	10	15	30	30	CK7-43E-11-✱-AH45A-A11

Section Obsolete
See pages F1.40 - F1.55

For applications above 45 amps please consider open type combination starters on page C59.

Description ❸

- The EcomboPlus starter is a factory assembly consisting of a KT7 controller with 1 NO and 1 NC auxiliary and a CA7-9E…43E contactor housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. Terminal Adaptor (Cat.# KT7-25-TE1 or KT7-45-TE) is also included for Type E applications.

Coil Codes ❹

DC Coil Codes	Voltage
12E	12V
24E	24V
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Horsepower ratings shown in the tables are for reference only. *The final selection of the controller depends on the actual motor full load current and service factor.*

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. – 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4A.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ See Factory Options on page F69 for additional auxiliary contact configurations.
- KT7 supplied with (1) NO and (1) NC auxiliary contact
- CK7-9…23E supplied with (1) NO auxiliary contact
- CK7-30…37E supplied with (1) NO and (1) NC side mount auxiliary contact
- CK7-43E supplied with (1) NO and (1) NC front mount auxiliary contact

❸ Mounting Options:
- Screw Fixing
- Snap Fixing on (1) or (2) 35 mm DIN Rails
- Snap Fixing on (1) 75 mm DIN Rail

❹ CK7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.
❺ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
❻ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.

Reversing Ecombo*Plus* Starters with AC Coil, Series CA7 Contactors

Thermal Trip [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❻
KTA7-25S — Standard Interrupting Capacity							
0.10...0.16	2.1	1	~	~	~	~	CKU7-9-22-✱-AS0.16A-A11
0.16...0.25	3.3	2	~	~	~	~	CKU7-9-22-✱-AS0.25A-A11
0.25...0.40	5.2	3	~	~	~	~	CKU7-9-22-✱-AS0.4A-A11
0.40...0.63	8.2	4	~	~	~	~	CKU7-9-22-✱-AS0.63A-A11
0.63...1	13	5	~	~	~	1/2	CKU7-9-22-✱-AS1A-A11
1...1.6	21	6	~	~	1/2	3/4	CKU7-9-22-✱-AS1.6A-A11
1.6...2.5	33	7	1/2	1/2	1	1-1/2	CKU7-9-22-✱-AS2.5A-A11
2.5...4	52	8	3/4	3/4	2	3	CKU7-9-22-✱-AS4A-A11
4...6.3	82	9	1	1-1/2	3	5 ❺	CKU7-9-22-✱-AS6.3A-A11 ❺
6.3...10	130	11	2	3	5	7-1/2 ❺	CKU7-12-22-✱-AS10A-A11 ❺
10...16	208	12	3	5	10	10 ❺	CKU7-16-22-✱-AS16A-A11 ❺
14.5...20	260	15	5	5	10	15 ❺	CKU7-23-22-✱-AS20A-A11 ❺
18.5...25	325	16	5 ❺	7-1/2 ❺	15 ❺	20 ❺	CKU7-23-22-✱-AS25A-A11 ❺
KTA7-25H — High Interrupting Capacity							
1.6...2.5	33	17	1/2	1/2	1	1-1/2	CKU7-9-22-✱-AH2.5A-A11
2.5...4	52	19	3/4	3/4	2	3	CKU7-9-22-✱-AH4A-A11
4...6.3	82	22	1	1-1/2	3	5	CKU7-9-22-✱-AH6.3A-A11
6.3...10	130	24	2	3	5	7-1/2	CKU7-12-22-✱-AH10A-A11
10...16	208	28	3	5	10	10	CKU7-16-22-✱-AH16A-A11
14.5...20	260	31	5	5	10	15 ❺	CKU7-23-22-✱-AH20A-A11 ❺
18...25	325	33	5	7-1/2	15	20 ❺	CKU7-23-22-✱-AH25A-A11

Horsepower ratings shown in the table are for reference only. ***The final selection of the controller depends on the actual motor full load current and service factor.***

- *For motor with service factor less than 1.15.* Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor F.L.C. = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select Catalog Number KTA7-25S-4

Section Obsolete
See pages F1.40 - F1.55

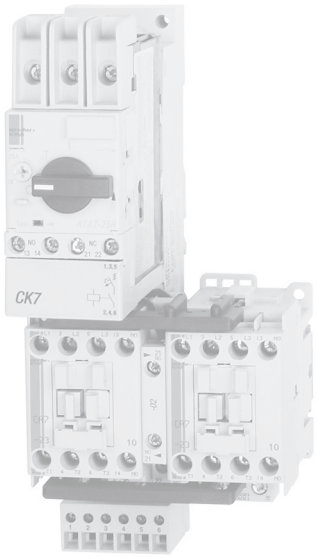

Description ❸

The Ecombo*Plus* Reversing starter is a factory assembly consisting of a KT controller with 1 NO - 1 NC auxiliary and reversing CA7 contactors housed in a specially designed frame. All control wiring is pre-wired and brought out to a built-in terminal block, integral to the mounting frame. A Reversing Power Wiring Kit (Cat.# CAUT7-PW23) is used to wire the reversing contactors. An electrical and mechanical interlock is also provided (Cat.# CM7-02), as well as a Terminal Adaptor (Cat.# KT7-25-TE1) for Type E applications.

Coil Codes (✱) ❹❻

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
220W	200V-220V	208V-240V
277	240V	277V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ See Factory Options on page F69 for additional auxiliary contact configurations.
- KT7 supplied with (1) NO and (1) NC auxiliary contact
- CKU7 supplied with (2) NO auxiliary contact
- CM7-02 interlock supplied with (2) NC auxiliary contacts

❸ Mounting Options:
- Screw Fixing
- Snap Fixing on (1) or (2) 35 mm DIN Rails
- Snap Fixing on (1) 75 mm DIN Rail

❹ Other voltages available, see Section A in this catalog.
❺ Catalog numbers and/or specific voltages (i.e. @ 575V) shaded in gray are suitable for Group Installation, per NEC 430-53C, because they are not Type E/F rated. See page F73 for ratings.
❻ Suffix –A11 uses front-mount KT7-PE1-11 300 VAC maximum control circuit. This assembly is not applicable with control circuits greater than 300 VAC.

CL8 and CL7 Modifications ❹❺

Modification	Change Last Digit in Catalog Number to: ❶
KT7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts	
Auxiliary Contact 1 NO (CL8 only)	**A10**
Auxiliary Contact 1 NC	**A01**
Auxiliary Contact 1 NO + 1 NC	**A11**
Auxiliary Contact 2 NO	**A20**
1 NO SC or OL + 1 NC Auxiliary Contact	**T10A01**
1 NO SC or OL + 1 NO Auxiliary Contact	**T10A10**
KT7 Auxiliary (Side Mount 600VAC max.) and Trip Contacts	
Auxiliary Contact 1 NO + 1 NC	**AS11**
Auxiliary Contact 2 NO	**AS20**
1 NC SC or OL + 1 NO Auxiliary Contact	**R10**
1 NO SC or OL + 1 NC Auxiliary Contact	**R11**

CL8 and CL7 Additions ❹❺

Add desired suffix AFTER auxiliary contact option code.

Addition	Add Suffix to Catalog Number:
Accessories	
Electronic Interfaces (CA7)	**-JE** ❸
Surge Suppressor RC (CA7, CA8)	**-R**
Surge Suppressor Varistor (CA7, CA8)	**-V**
Surge Suppressor Diode (CA7, CA8)	**-D**
Lockable Twist Knob (KT7) - Black	**-KN**
Lockable Twist Knob (KT7) - Red/Yellow	**-KRY**
Type W Mounting Module for CL7…23 includes 45mm short module (W-32849) ❷	**-W**
Type W Mounting Module for CLU7-30…23 includes 45mm (W-32849) and 54mm (W-32490) short module ❷	**-W**
Additional CA7 Contactor Auxiliaries (Side Mount)	
1 NC	**-S01**
1 NO	**-S10**
1 NO + 1 NC	**-S11**
2 NO	**-S20**
Additional CA7 & CA8 Contactor Auxiliaries (Front Mount)	
1 NO + 1 NC	**-F11**
2 NO	**-F20**
2 NO + 2 NC	**-F22**
Additional KT7 Auxiliaries (Side Mount) ❺	
2 NC	**-AS02**
2 NO	**-AS20**
1 NO + 1 NC	**-AS11**
Additional KT7 Trip Contacts (Side Mount) ❺	
1 NO SC or OL + 1 NO SC	**-R00**
1 NO SC or OL + 1 NC SC	**-R01**
1 NC SC or OL + 1 NO SC	**-R10**
1 NC SC or OL + 1 NC SC	**-R11**
1 NO SC + 1 NC SC	**-M11**

CK7 Modifications ❺

Modification	Change Last Digits (A11) in Catalog Number to: ❶
CK7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts	
Auxiliary Contact 2 NO	**A20**
1 NO SC or OL + 1 NC Auxiliary Contact	**T10A01**
1 NO SC or OL + 1 NO Auxiliary Contact	**T10A10**

CK7 Additions ❹❺

Add desired suffix AFTER auxiliary contact option code.

Addition	Add Suffix to Catalog Number:
Accessories	
Electronic Interfaces (CA7)	**-JE**
Surge Suppressor RC (CA7)	**-R**
Surge Suppressor Varistor (CA7)	**-V**
Surge Suppressor Diode (CA7)	**-D**
Socket and Plug for Control Circuit	**-SP**
Lockable Twist Knob (KT7) - Black	**-KN**
Lockable Twist Knob (KT7) - Red/Yellow	**-KRY**
Additional Contactor Auxiliaries (Side Mount)	
1 NC	**-S01**
1 NO	**-S10**
1 NO + 1	**-S11**
2 NO	**-S20**
Additional KT7 Auxiliaries (Side Mount) ❺	
2 NC	**-AS02**
2 NO	**-AS20**
1 NO + 1 NC	**-AS11**
Additional KT7 Trip Contacts (Side Mount) ❺	
1 NO SC or OL + 1 NO SC	**-R00**
1 NO SC or OL + 1 NC SC	**-R01**
1 NC SC or OL + 1 NO SC	**-R10**
1 NC SC or OL + 1 NC SC	**-R11**
1 NO SC + 1 NC SC	**-M11**

Section Obsolete
See pages F1.40 - F1.55

❶ For CL8, change last digit "X" to one of the modifications listed. Example: CL8-09-10-✱-AS0.16A-**X** changes to CL8-09-10-✱-AS0.16A-**A10**. For CL7, change last digits "A10" to one of the modifications listed. Example: CL7-9-10-⁎-AS0.16A-**A10** changes to CL7-9-10-✱-AS0.16A-**A01**.

❷ CL7/CLU7-30…43 include all Type W Mounting Modules necessary from page F17.

❸ CRI7E-24 will be used. CRI7E-12 by special order only.

❹ See pages A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.

❺ Front Mount Auxiliary contacts have a maximum rating of 300VAC. Side Mounted Auxiliaries have a maximum rating of 600VAC where there would be no connection to the terminal block provided.

Non-Reversing 3-Component Ecombo Starters with AC Coil ❸❺

Rated Oper. Current [A] ❻	Overload Adj. Range [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] ❻ 200V	230V	460V	575V	Catalog Number ❷❹❼
KTB7-25S — Standard Interrupting Capacity								
0.40	0.1…0.5	5.2	3B	~	~	~	~	CLT7-9-✱-B2S0.4-A10-D1AB
0.40	0.1…0.5	5.2	3B	~	~	~	~	CLT7-9-✱-B2S0.4-A10-EAB
1.0	0.2…1.0	13	5B	~	~	~	1/2	CLT7-9-✱-B2S1-A10-D1BB
1.0	0.2…1.0	13	5B	~	~	~	1/2	CLT7-9-✱-B2S1-A10-EBB
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	CLT7-9-✱-B2S2.5-A10-D1CB
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	CLT7-9-✱-B2S2.5-A10-ECB
KTB7-25H — High Interrupting Capacity								
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	CLT7-9-✱-B2H2.5-A10-D1CB
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	CLT7-9-✱-B2H2.5-A10-ECB
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	CLT7-23-✱-B2H2.5-A10-D1CB
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	CLT7-23-✱-B2H2.5-A10-ECB
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	CLT7-23-✱-B2H4-A10-D1CB
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	CLT7-23-✱-B2H4-A10-ECB
10	5.1…27	130	27B	2	3	5	7-1/2	CLT7-30-✱-B2H10-A10-EFD
16	5.1…27	208	30B	3	5	10	10	CLT7-30-✱-B2H16-A10-EFD
25	5.1…27	325	34B	5	7-1/2	15	~	CLT7-30-✱-B2H25-A10-EED
KTB7-45H — High Interrupting Capacity								
25	5.1…27	325	39B	5	7-1/2	15	15	CLT7-30-✱-B4H25-A10-EFD
32	9…45	416	41B	7-1/2	10	20	20	CLT7-30-✱-B4H32-A10-EFD
32	9…45	416	42B	7-1/2	10	20	20	CLT7-37-✱-B4H32-A10-EFD
45	9…45	585	45B	10	10	25	25	CLT7-37-✱-B4H45-A10-EFD
45	9…45	585	46B	10	15	30	30	CLT7-43-✱-B4H45-A10-EFD

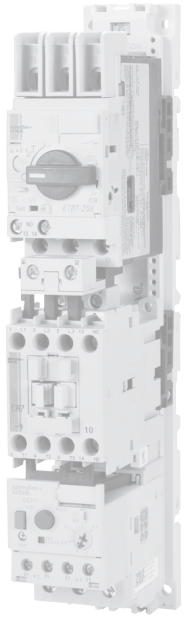

Includes:
- KTB7 Motor Controller
- CA7 Contactor (AC)
- CEP7 Solid State Overload Relay
- KT7-PSC and PNC Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 25A or 45A Frame Units as required from page F17
- See page F72 for Factory Options

Section Obsolete
See pages F1.40 - F1.55

Coil Codes (✱) ❷

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
220W	200-220V	208-240V
277	240V	277V
415	400-415V	~
480 ❼	440V	480V
600 ❼	550V	600V

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ All CLT7 contactors are supplied with Auxiliary Contacts as follows;
CLT7-9…23 (1) NO Internal Mount
CLT7-30…37 (1) NO Side Mount
CLT7-43 (1) NO & (1) NC Front Mount
All KTB7s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
❹ See page F72 for CEP7 Overload Relay information.
❺ Horsepower ratings shown in tables are for reference only. ***The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.***
❻ The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.
In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.
Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.
❼ Catalog number includes –A10 which uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change –A10 to –AS11 (example CLT7-9-✱-B2S0.4-**AS11**-D1AB) Add $66.43 or see options on page F72.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

Reversing 3-Component Ecombo Starters with AC Coil ❸❹❺

Rated Oper. Current [A] ❻	Overload Adj. Range [A]	Magnetic Trip [A]	Index ❶	Typical Three Phase [HP] 200V	230V	460V	575V	Catalog Number ❷❹❼
KTB7-25S — Standard Interrupting Capacity								
0.40	0.1…0.5	5.2	3B	~	~	~	~	**CLUT7-9-✱-B2S0.4-A10-D1AB**
0.40	0.1…0.5	5.2	3B	~	~	~	~	**CLUT7-9-✱-B2S0.4-A10-EAB**
1.0	0.2…1.0	13	5B	~	~	~	1/2	**CLUT7-9-✱-B2S1-A10-D1BB**
1.0	0.2…1.0	13	5B	~	~	~	1/2	**CLUT7-9-✱-B2S1-A10-EBB**
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	**CLUT7-9-✱-B2S2.5-A10-D1CB**
2.5	1.0…5.0	33	7B	1/2	1/2	1	~	**CLUT7-9-✱-B2S2.5-A10-ECB**
KTB7-25H — High Interrupting Capacity								
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	**CLUT7-9-✱-B2H2.5-A10-D1CB**
2.5	1.0…5.0	33	17B	1/2	1/2	1	~	**CLUT7-9-✱-B2H2.5-A10-ECB**
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	**CLUT7-23-✱-B2H2.5-A10-D1CB**
2.5	1.0…5.0	33	18B	1/2	1/2	1	1-1/2	**CLUT7-23-✱-B2H2.5-A10-ECB**
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	**CLUT7-23-✱-B2H4-A10-D1CB**
4.0	1.0…5.0	52	21B	3/4	3/4	2	3	**CLUT7-23-✱-B2H4-A10-EC**
10	5.1…27	130	27B	2	3	5	7-1/2	**CLUT7-30-✱-B2H1[illegible]-A[illegible]-EED**
16	5.1…27	208	30B	3	5	10	10	**CL[illegible]-A10-EED**
25	5.1…27	325	34B	5	7-1/2	15	~	**CL[illegible]-✱-B2H25-A10-EED**
KTB7-45H — High Interrupting Capacity								
25	5.1…27	325	39B	5	[illegible]	[illegible]	20	**CLUT7-30-[illegible]-A10-EED**
32	9…45	416	[illegible]B	[illegible]	10	20	20	**CL[illegible]-30-✱-B[illegible]H32-A10-EFD**
32	9…45	416	42B	7-1/2	10	20	20	**CLUT7-37-✱-B4H32-A10-EFD**
45	9…45	585	45B	10	10	[illegible]	[illegible]	**CLUT7-37-✱-B4H45-A10-EFD**
45	9…45	585	46B	10	[illegible]	[illegible]	~	**CLUT7-43-✱-B4H45-A10-EFD**

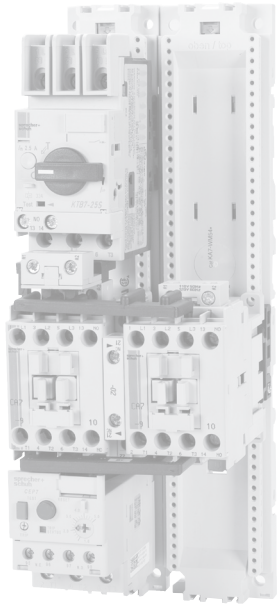

Includes:

- KTB7 Motor Controller
- CAU7 Reversing Contactor (AC)
- [illegible]EP7 Solid State Overload Relay
- KT[illegible]PSC and PNC Connectors
- Terminal Adaptor for Type E Applications
- Mounting Modules for 25A or 45A Frame Units as required from page F17
- See page F72 for Factory Options

Section Obsolete
See pages F1.40 - F1.55

Coil Codes (✱) ❷

AC Coil Code	Voltage [illegible]nge 50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
220W	200-220V	208-240V
277	240V	277V
415	400-415V	~
480 ❼	**440V**	**480V**
600 ❼	550V	600V

❶ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.
❷ Other voltages available, see Section A in this catalog.
❸ All CLUT7 are supplied with Auxiliary Contacts for customer use as follows;
CLUT7-9…23 (1) NO Internal Mount
CLUT7-30…37 (1) NO Side Mount
CLUT7-43 (1) NO & (1) NC Front Mount
CM7-02 interlock (2) NC (Electrical Interlocks)
All KTB7s are supplied with (1) NO auxiliary contact (A10), which should be used in series with the NC contact on the overload (95-96).
❹ All CAU7 reversing contactors are supplied with CM7-02, including (2) NC contacts for electronic interlocking (not available for customer use).
❺ Horsepower ratings shown in tables are for reference only. ***The final selection of the controller and solid state overload relay depends on the actual motor full load current and service factor.***
❻ The KTB7 Motor Circuit Controller is designed and tested to protect a motor circuit in case of a short circuit. A separate Sprecher + Schuh CEP7-EE_ overload relay with selectable trip class should be used to protect the motor against overload.
In Applications with motor starting times exceeding 10 seconds (heavy duty starting) the rated operational current (I_e) of the motor FLA must be multiplied by the following factors for selection of the KTB7 Motor Circuit Controller KTB7-25S, KTB7-25H/32H and KTB7-45H.
Trip classes according to UL 508 Section 52 and IEC 60947-4-1
CLASS 10 = 1.0, CLASS 15 = 1.22, CLASS 20 = 1.42, CLASS 25 = 1.58, CLASS 30 = 1.73
The maximum number of motor starts in 25 cycles/hour with a minimum OFF-time of 120 seconds between cycles. This additional calculation and selecting a larger frame size is necessary to compensate (dissipate) the increased heat resulting from long acceleration applications effecting the rated operational current of the KTB7.
❼ Catalog number includes –A10 which uses front-mount KT7-PE1-10 300 VAC maximum control circuit. For control circuits greater than 300 VAC use side-mount KT7-PA1-11 and change –A10 to –AS11 (example CLUT7-9-✱-B2S0.4-**AS11**-D1AB) Add $66.43 or see options on page F72.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code	**See Coil Code table on this page for codes.**

CLT7/CLUT7 Modifications ⑩

Modification	Change "X" Digit in Catalog Number to: ⑧
KT7 Auxiliary (Front Mount 300VAC max.) and Trip Contacts	
Auxiliary Contact 1 NO + 1 NC	**A11**
Auxiliary Contact 2 NO	**A20**
1 NO SC + 1 NC Auxiliary Contact	**T10A01**
1 NO SC + 1 NO Auxiliary Contact	**T10A10**
KT7 Auxiliary (Side Mount 300VAC max.) and Trip Contacts	
Auxiliary Contact 1 NO + 1 NC	**AS11**
Auxiliary Contact 2 NO	**AS20**
1 NC SC + 1 NO Auxiliary Contact	**R10**
1 NC SC + 1 NC Auxiliary Contact	**R11**

CLT7/CLUT7 Additions ⑩

Addition	Add Suffix to end of Catalog Number:
Accessories	
Electronic Interfaces	**-JE**
Surge Suppressor RC	**-R**
Surge Suppressor Varistor	**-V**
Surge Suppressor Diode	**-D**
Lockable Twist Knob (KT7) - Black	**-KN**
Lockable Twist Knob (KT7) - Red/Yellow	**-KRY**
Additional CA7 Contactor Auxiliaries (Side Mount) ⑨	
1 NC	**-S01**
1 NO	**-S10**
1 NO + 1 NC	**-S11**
2 NO	**-S20**
Additional CA7 Contactor Auxiliaries (Front Mount) ⑨	
1 NO + 1 NC	**-F11**
2 NO	**-F20**
2 NO + 2 NC	**-F22**
Additional KT7 Auxiliaries (Side Mount) ⑨⑩	
2 NC	**-AS02**
2 NO	**-AS20**
1 NO + 1 NC	**-AS11**
Additional KT7 Trip Contacts (Side Mount) ⑩	
1 NO SC + 1 NO SC	**-R00**
1 NO SC + 1 NC SC	**-R01**
1 NC SC + 1 NC SC	**-R11**

CEP7 Solid State Overload Relay ①②③

(As specified in the CLT7/CLUT7 Catalog Number)

For use with contactor...	Amp Range	Last Suffix in Catalog Number ⑤	Catalog Number (of Overload Relay used)
3-Phase / Manual Reset / Class 10			
CA7-9...CA7-23	0.1...0.5	**D1AB**	CEP7-ED1AB
	0.2...1.0	**D1BB**	CEP7-ED1BB
	1.0...5.0	**D1CB**	CEP7-ED1CB
3-Phase / Auto or Manual / Adjustable Trip Class 10, 15, 20 & 30			
CA7-9...CA7-23	0.1...0.5	**EAB**	CEP7-EEAB
	0.2...1.0	**EBB**	CEP7-EEBB
	1.0...5.0	**ECB**	CEP7-EECB
CA7-30...CA7-43	5.4...27	**EED**	CEP7-EEED
	9...45	**EFD**	CEP7-EEFD

CEP7 Side Mount Module Addition ④⑦⑨

Addition	For use with...	Add Suffix to end of Catalog Number
Ethernet Reset Module	Side-mount to any CEP7-EE_	**-ERR**
Jam Protection and Remote Reset Module		**-EJM**
Ground Fault Protection and Remote Reset Module ⑥	Side-mount to any CEP7-EE_	**-EGF**
Ground Fault/Jam Protection and Remote Reset Module ⑥	Must use with CEP7-CBCT_ Current Sensor	**-EGJ**
PTC Thermistor Relay and Remote Reset Module	Side-mount to any CEP7-EE_	**-EPT**
Ethernet Network Communication Module	Side-mount to any CEP7-EE_	**-ETN**

Section Obsolete
See pages F1.40 - F1.55

① 3-phase CEP7 units are only designed for 3∅ applications.
② The reset time of a CEP7 set in the automatic mode is approximately 120 seconds.
③ CEP7 Overload relays do not work with Variable Frequency Drives or any Sprecher + Schuh Softstarter with braking options.
④ Side mount modules must have 24 - 240V, 47 - 63HZ or DC applied to terminals A1 and A2 for control power. See Section B for connection details.
⑤ CEP7 Overloads shown are UL approved. Other overload combinations may be possible. Contact your Sprecher+Schuh representative.
⑥ ATTENTION: The CEP7 Overload relay is not a ground fault circuit interrupter for personnel protection as defined in Article 100 of the NEC.
⑦ See Section B for Technical Data, Wiring, and DIP Switch set up.
⑧ For CLT7, change digit "A10" to one of the modifications listed. Example: Change CLT7-9-✱-B2S0.4-**A10**-D1AB to CLT7-9-✱-B2S0.4-**A11**-D1AB.
⑨ Side mount auxiliaries and CEP7 modules change the width dimension of the device. See Dimensions in this section for more information.
⑩ Front Mount Auxiliary contacts have a maximum rating of 300VAC. Side Mounted Auxiliaries have a maximum rating of 600VAC. See page F12 for additional information.

KT7 Assembly – Application Rating Chart *(Ratings are dependent on type of application)* ❶

Rating Index	Assembly Components		Manual Controller or Group Installation				Combination Motor Controller (Type F)				Self-Protected Combination Motor Controller (Type E)	
			480V		600V		480Y / 277V		600Y / 347V		480Y / 277V	600Y / 347V
	KT7	Minimum Contactor Size	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type E KAIC	Type E KAIC
KTA7 + CA7 UL Assemblies (CL7 / CLU7/ CK7 / CKU7)												
1	**KTA7-25S-0.16A**	CA7-9	65	65	47	47	65	65	47	47	65	47
2	**KTA7-25S-0.25A**	CA7-9	65	65	47	47	65	65	47	47	65	47
3	**KTA7-25S-0.4A**	CA7-9	65	65	47	47	65	65	47	47	65	47
4	**KTA7-25S-0.63A**	CA7-9	65	65	47	47	65	65	47	47	65	47
5	**KTA7-25S-1A**	CA7-9	65	65	47	47	65	65	47	47	65	47
6	**KTA7-25S-1.6A**	CA7-9	65	65	47	47	65	65	47	47	65	47
7	**KTA7-25S-2.5A**	CA7-9	65	65	30	10	65	65	30	10	65	~
8	**KTA7-25S-4A**	CA7-9	65	50	30	~	65	~	30	~	~	~
--	KTA7-25S-4A	CA7-30	65	~	30	~	65	~	30	~	~	~
9	**KTA7-25S-6.3A**	CA7-9	65	50	30	~	65	~	~	~	~	~
11	**KTA7-25S-10A**	CA7-9	65	50	30	~	65	~	~	~	~	~
12	**KTA7-25S-16A**	CA7-12	30	~	30	~	~	~	~	~	~	~
14	KTA7-25S-16A	CA7-30	30	~	30	~	30	~	~	~	~	~
15	**KTA7-25S-20A**	CA7-16	30	~	30	~	10	~	~	~	~	~
16	**KTA7-25S-25A**	CA7-23	30	~	30	~	~	~	~	~	~	~
--	KTA7-32S-29A	CA7-30	30	10	30	~	~	~	~	~	~	~
--	KTA7-32S-32A	CA7-37	30	10	30	~	~	~	~	~	~	~
17	**KTA7-25H-2.5A**	CA7-9	65	65	30	30	65	65	30	10	65	~
18	KTA7-25H-2.5A	CA7-30	65	65	30	30	65	65	30	30	65	30
19	**KTA7-25H-4A**	CA7-9	65	65	30	~	65	65	30	~	~	~
21	KTA7-25H-4A	CA7-30	65	65	30	30	65	65	30	30	65	30
22	**KTA7-25H-6.3A**	CA7-9	65	65	30	~	65	65	30	~	~	~
23	KTA7-25H-6.3A	CA7-30	65	65	30	~	65	65	30	30	65	30
24	**KTA7-25H-10A**	CA7-9	65	65	30	~	65	65	30	~	~	~
27	KTA7-25H-10A	CA7-30	65	65	30	~	65	65	30	30	65	30
28	**KTA7-25H-16A**	CA7-12	65	65	30	~	65	65	30	~	~	~
30	KTA7-25H-16A	CA7-30	65	65	30	~	65	65	30	30	65	30
31	**KTA7-25H-20A**	CA7-23	65	65	30	~	65	65	~	~	~	~
32	KTA7-25H-20A	CA7-30	65	65	30	~	65	65	~	~	65	~
33	**KTA7-25H-25A**	CA7-23	65	65	30	~	65	65	~	~	~	~
34	KTA7-25H-25A	CA7-30	65	65	30	~	65	65	~	~	65	~
--	KTA7-32H-29A	CA7-30	65	65	30	~	~	~	~	~	~	~
--	KTA7-32H-32A	CA7-37	65	65	30	~	~	~	~	~	~	~
36	**KTA7-45H-10A**	CA7-30	65	65	30	30	65	65	30	30	65	30
37	**KTA7-45H-16A**	CA7-30	65	65	30	30	65	65	30	30	65	30
38	**KTA7-45H-20A**	CA7-30	65	65	30	30	65	65	30	30	65	30
39	**KTA7-45H-25A**	CA7-30	65	65	30	30	65	65	30	30	65	30
41	**KTA7-45H-32A**	CA7-30	65	65	30	30	65	65	30	30	65	30
45	**KTA7-45H-45A**	CA7-37	65	65	18	10	65	65	~	~	65	~
46	**KTA7-45H-45A**	CA7-43	65	65	18	10	65	65	~	~	65	~

Section Obsolete
See pages F1.40 - F1.55

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules.
Engineering Practice allows wire connection as an alternative.

KT7 Assembly – Application Rating Chart *(Ratings are dependent on type of application)* ❶❷

Rating Index	Assembly Components		Manual Controller or Group Installation				Combination Motor Controller (Type F)				Self-Protected Combination Motor Controller (Type E)	
			480V		600V		480Y / 277V		600Y / 347V		480Y / 277V	600Y / 347V
	KT7	Minimum Contactor Size	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type E KAIC	Type E KAIC
KTC7 + CA7 UL Assemblies ❶												
❶	KTC7-25S-0.16A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-0.25A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-0.4A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-0.63A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-1A	CA7-9…23	65	65	47	47	65	65	47	47	65	47
	KTC7-25S-1.6A	CA7-9…23	65	65	30	10	65	65	30	10	65	~
	KTC7-25S-2.5A	CA7-9…23	65	50	30	~	65	~	30	~	~	~
	KTC7-25S-2.5A	CA7-23	65	50	30	~	65	~	~	~	~	~
	KTC7-25S-4A	CA7-9…23	65	50	30	~	65	~	~	~	~	~
	KTC7-25S-6.3A	CA7-12…23	65	50	30	~	65	~	~	~	~	~
	KTC7-25S-10A	CA7-12…43	30	~	30	~	30	~	~	~	~	~
	KTC7-25S-16A	CA7-23	30	~	30	~	[illegible]	~	~	~	~	~
❶	KTC7-25H-16A	CA7-23	65	65	3[illegible]	~	65	65	~	~	~	~
	KTC7-25H-16A	CA7-30	65	65	30	~	65	65	~	~	65	~
	KTC7-25H-20A	CA7-23	65	65	30	~	[illegible]	65	~	~	~	~
	KTC7-25H-20A	CA7-30	65	65	30	~	65	65	~	~	65	~
❶	KTC7-45H-25A	CA7-30	65	65	30	~	65	65	30	30	65	30
	KTC7-45H-32A	CA7-37	65	65	[illegible]	10	65	65	~	~	65	~

Section Obsolete
See pages F1.40 - F1.55

❶ Non-cataloged assemblies. Contact your Sprecher+ Schuh representative for information.
❷ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

KT7 Assembly – Application Rating Chart *(Ratings are dependent on type of application)* ❶

Rating Index	Assembly Components		Manual Controller or Group Installation				Combination Motor Controller (Type F)				Self-Protected Combination Motor Controller (Type E)	
			480V		600V		480Y / 277V		600Y / 347V		480Y / 277V	600Y / 347V
	KT7	Minimum Contactor Size	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type 1 KAIC	Type 2 KAIC	Type E KAIC	Type E KAIC
KTA7 + CA8 UL Assemblies (CL8 / CLU8)												
--	KTA7-25S-(0.16A…1A)	CA8-05	65	65	47	~	65	~	47	~	~	~
--	KTA7-25S-1.6A	CA8-05	65	~	47	~	65	~	47	~	~	~
--	KTA7-25S-(2.5A…4A)	CA8-05	65	~	30	~	65	~	30	~	~	~
--	KTA7-25S-6.3A	CA8-05	65	~	~	~	65	~	~	~	~	~
1M	KTA7-25S-0.16A	CA8-09	65	65	47	~	65	65	47	~	~	~
2M	KTA7-25S-0.25A	CA8-09	65	65	47	~	65	65	47	~	~	~
3M	KTA7-25S-0.4A	CA8-09	65	65	47	~	65	65	47	~	~	~
4M	KTA7-25S-0.63A	CA8-09	65	65	47	~	65	65	47	~	~	~
5M	KTA7-25S-1A	CA8-09	65	65	47	~	65	65	47	~	~	~
6M	KTA7-25S-1.6A	CA8-09	65	65	47	~	65	65	47	~	~	~
7M	KTA7-25S-2.5A	CA8-09	65	~	30	~	65	~	30	~	~	~
8M	KTA7-25S-4A	CA8-09	65	~	30	~	65	~	30	~	~	~
9M	KTA7-25S-6.3A	CA8-09	65	~	30	~	65	~	~	~	~	~
10M	KTA7-25S-10A	CA8-09	65	~	~	~	65	~	~	~	~	~
--	KTA7-25S-(2.5A…4A)	CA8-12	65	~	30	~	65	~	30	~	~	~
--	KTA7-25S-6.3A	CA8-12	~	~	~	~	65	~	~	~	~	~
11M	KTA7-25S-10A	CA8-09	65	~	~	~	65	~	~	~	~	~
12M	KTA7-25S-16A	CA8-12	30	~	30	~	30	~	~	~	~	~

Section Obsolete
See pages F1.40 - F1.55

Rating Index	Assembly Components			Self-Protected Combination Motor Controller (Type E KAIC) ❷		
	KT7	Minimum Contactor Size	Overload Relay	208V-240V	480Y / 277V	600Y / 347V
KTB7 + CA7 + CEP7 UL Assemblies (CLT7 / CLUT7)						
3B	KTB7-25S-0.4A	CA7-9	CEP7-ED1AB	65	65	47
3B	KTB7-25S-0.4A	CA7-9	CEP7-EEAB	65	65	47
5B	KTB7-25S-1A	CA7-9	CEP7-ED1BB	65	65	47
5B	KTB7-25S-1A	CA7-9	CEP7-EEBB	65	65	47
7B	KTB7-25S-2.5A	CA7-9	CEP7-ED1CB	65	65	~
7B	KTB7-25S-2.5A	CA7-9	CEP7-EECB	65	65	~
17B	KTB7-25H-2.5A	CA7-9	CEP7-ED1CB	65	65	~
17B	KTB7-25H-2.5A	CA7-9	CEP7-EECB	65	65	~
18B	KTB7-25H-2.5A	CA7-23	CEP7-ED1CB	65	65	30
18B	KTB7-25H-2.5A	CA7-23	CEP7-EECB	65	65	30
21B	KTB7-25H-4A	CA7-23	CEP7-ED1CB	65	65	30
21B	KTB7-25H-4A	CA7-23	CEP7-EECB	65	65	30
27B	KTB7-25H-10A	CA7-30	CEP7-EEED	65	65	30
30B	KTB7-25H-16A	CA7-30	CEP7-EEED	65	65	30
34B	KTB7-25H-25A	CA7-30	CEP7-EEED	65	65	~
39B	KTB7-45H-25A	CA7-30	CEP7-EEED	65	65	30
41B	KTB7-45H-32A	CA7-30	CEP7-EEFD	65	65	30
42B	KTB7-45H-32A	CA7-37	CEP7-EEFD	65	65	30
45B	KTB7-45H-45A	CA7-37	CEP7-EEFD	65	65	~
46B	KTB7-45H-45A	CA7-43	CEP7-EEFD	65	65	~

Definition of Type 2 short-circuit coordination per UL508

- The contactor or starter must not endanger persons or plant in the event of a short-circuit.
- The contactor or starter must be suitable for continuous use.
- No damage to the overload relay or other parts may occur with the exception of welding of the contactor or starter contacts if these can be easily separated without appreciable deformation (such as with a screwdriver).

In the event of a short-circuit, fast-opening, strong current-limiting KT7 motor protectors make it possible to build economical, fully short-circuit coordinated starter combinations in accordance with UL508E, Type 2 coordination.

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

❷ UL approved, File 125316.

KT7 Assembly – IEC Application Rating Chart *(Ratings are dependent on type of application)* ❶

Rating Index	Assembly Components		IEC kW Ratings for Standard Motors, 1500 rpm Max. kW, 50Hz ❷				Max. Short-Circuit Current [kA] IEC Type 1 Coordination				Max. Short-Circuit Current [kA] IEC Type 2 Coordination			
	KT7	Min. Contactor	230V	400V	500V	690V	230V	400V	500V	690V	230V	400V	500V	690V
KTA7 + CA7 IEC Assemblies (CL7 / CLU7/ CK7 / CKU7)														
1	KTA7-25S-0.16A	CA7-9	~	~	0.06	0.06	100	100	65	50	100	100	65	50
2	KTA7-25S-0.25A	CA7-9	0.02	0.06	0.06	0.12	100	100	65	50	100	100	65	50
3	KTA7-25S-0.4A	CA7-9	0.06	0.09	0.12	0.18	100	100	65	50	100	100	65	50
4	KTA7-25S-0.63A	CA7-9	0.09	0.18	0.18	0.37	100	100	65	50	100	100	65	50
5	KTA7-25S-1A	CA7-9	0.12	0.25	0.37	0.55	100	100	65	50	100	100	65	50
6	KTA7-25S-1.6A	CA7-9	0.25	0.55	0.75	1.1	100	100	65	50	100	100	65	50
7	KTA7-25S-2.5A	CA7-9	0.55	0.75	1.1	1.8	100	65	50	8	65	50	50	8
8	KTA7-25S-4A	CA7-9	0.75	1.5	2.2	3	100	50	50	8	50	50	~	~
9	KTA7-25S-6.3A	CA7-9	1.5	2.2	3	4	100	50	50	4	50	50	~	~
10	KTA7-25S-10A	CA7-9	2.2	4	4	~	100	65	50	~	50	50	~	~
11	KTA7-25S-10A	CA7-12	2.2	4	5.5	5.5	100	65	50	4	50	50	50	~
--	KTA7-25S-10A	CA7-16	2.2	4	5.5	7.5	100	65	50	4	50	50	50	~
12	KTA7-25S-16A	CA7-12	4	5.5	~	~	100	65	~	~	50	50	~	~
--	KTA7-25S-16A	CA7-16	4	7.5	7.5	~	100	50	10	~	50	~	~	~
14	KTA7-25S-16A	CA7-23	4	7.5	10	10	100	50	10	~	50	50	~	~
15	KTA7-25S-20A	CA7-23	4	10	11	~	50	15	6	~	15	~	~	~
16	KTA7-25S-25A	CA7-23	6.3	11	13	~	50	15	6	~	15	~	~	~
17	KTA7-25H-2.5A	CA7-9	0.55	0.75	1.1	1.8	100	100	50	10	100	100	50	10
18	KTA7-25H-2.5A	CA7-23	0.55	0.75	1.1	1.8	100	100	50	10	100	100	50	10
19	KTA7-25H-4A	CA7-9	0.75	1.5	2.2	3	100	100	50	10	100	100	50	~
21	KTA7-25H-4A	CA7-23	0.75	1.5	2.2	3	100	100	50	50	100	100	50	50
22	KTA7-25H-6.3A	CA7-9	1.5	2.2	3	4	100	100	50	50	100	100	50	~
--	KTA7-25H-10A	CA7-9	2.2	4	4	~	100	65	50	~	100	65	~	~
24	KTA7-25H-10A	CA7-12	2.2	4	5.5	5.5	100	100	65	50	100	100	65	~
--	KTA7-25H-10A	CA7-16	2.2	4	5.5	7.5	100	100	65	50	100	100	65	50
--	KTA7-25H-16A	CA7-12	4	5.5	~	~	100	65	~	~	65	65	~	~
28	KTA7-25H-16A	CA7-16	4	7.5	7.5	~	100	65	50	~	65	65	50	~
--	KTA7-25H-16A	CA7-23	4	7.5	10	10	100	65	50	6	65	65	50	~
31	KTA7-25H-20A	CA7-23	4	10	11	~	65	65	25	~	65	65	25	~
33	KTA7-25H-25A	CA7-23	6.3	11	13	~	65	50	25	~	65	50	25	~
KTA7 + CA8 IEC Assemblies (CL8 / CLU8)														
1M	KTA7-25S-0.16A	CA8-09	~	0.02	~	~	100	65	65	65	65	65	~	~
2M	KTA7-25S-0.25A	CA8-09	0.02	0.06	0.06	~	100	65	65	65	65	65	~	~
3M	KTA7-25S-0.4A	CA8-09	0.06	0.09	0.12	~	100	65	65	65	65	65	~	~
4M	KTA7-25S-0.63A	CA8-09	0.09	0.18	0.18	~	100	65	65	65	65	65	~	~
5M	KTA7-25S-1A	CA8-09	0.12	0.25	0.37	~	100	65	65	65	65	65	~	~
6M	KTA7-25S-1.6A	CA8-09	0.25	0.55	0.75	~	100	65	65	10	65	65	~	~
7M	KTA7-25S-2.5A	CA8-09	0.55	0.75	1.1	~	100	65	65	8	65	65	~	~
8M	KTA7-25S-4A	CA8-09	0.75	1.5	2.2	~	100	65	65	8	50	50	~	~
9M	KTA7-25S-6.3A	CA8-09	1.5	2.2	2.2	~	100	65	65	4	~	~	~	~
10M	KTA7-25S-10A	CA8-09	2.2	4	4	~	100	65	65	4	~	~	~	~
11M	KTA7-25S-10A	CA8-12	2.2	4	4	~	100	65	65	4	~	~	~	~
12M	KTA7-25S-16A	CA8-12	4	5.5	~	~	100	50	50	3	~	~	~	~

Section Obsolete
See pages F1.40 - F1.55

Gray type indicates non-cataloged assembly. Contact your Sprecher+ Schuh representative for information.

❶ The ratings in these tables assume connection between components are made with Sprecher + Schuh Connection Modules. Engineering Practice allows wire connection as an alternative.

❷ kW ratings shown in the table are for reference. Final selection of the starter depends upon the actual motor full-load current and service factor.

Ecombo*Plus* Combination Starters

CK7-9...23

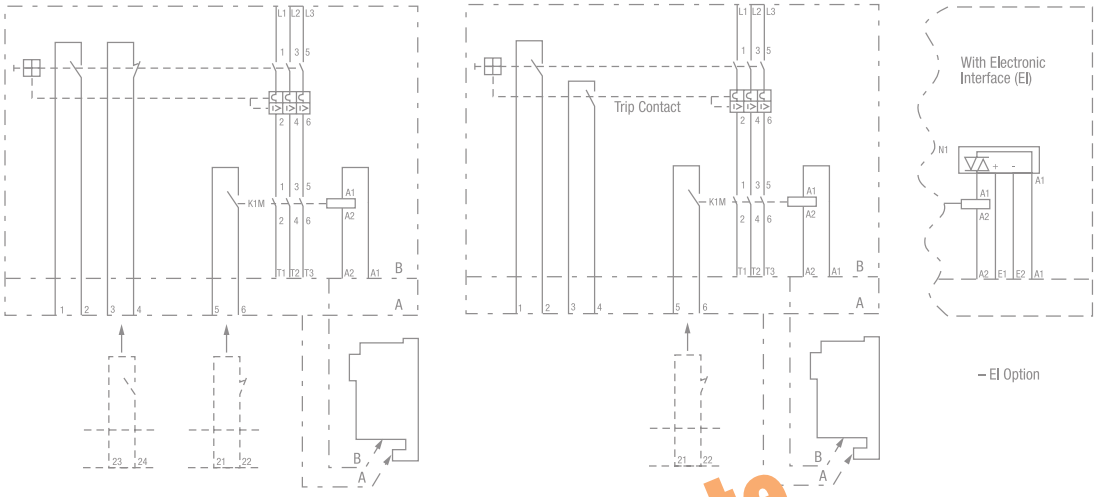

CK7-30...43

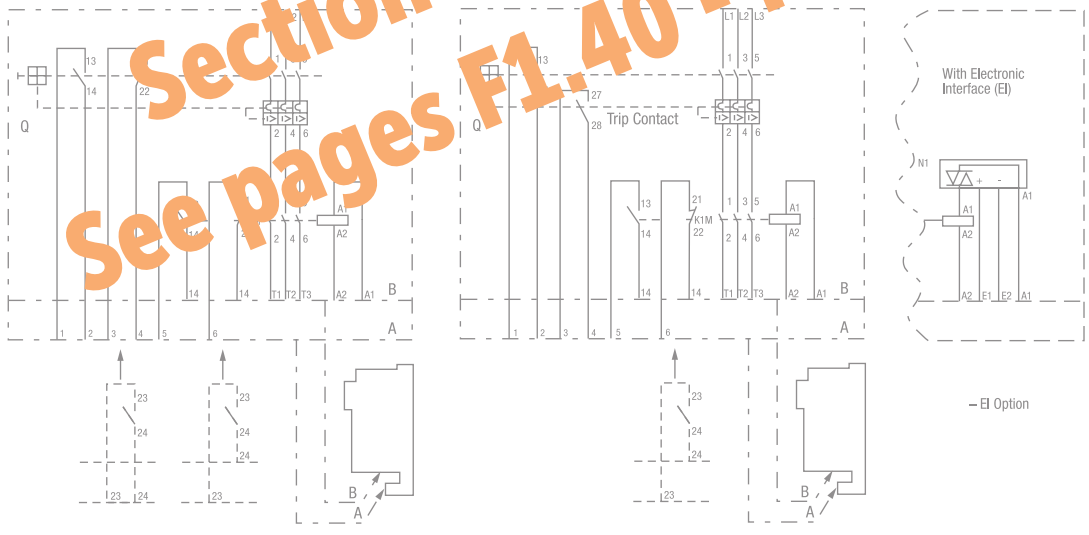

Section Obsolete
See pages F1.40 - F1.55

3-Component EComb Starters

CLT7-9...43 Typical Diagram

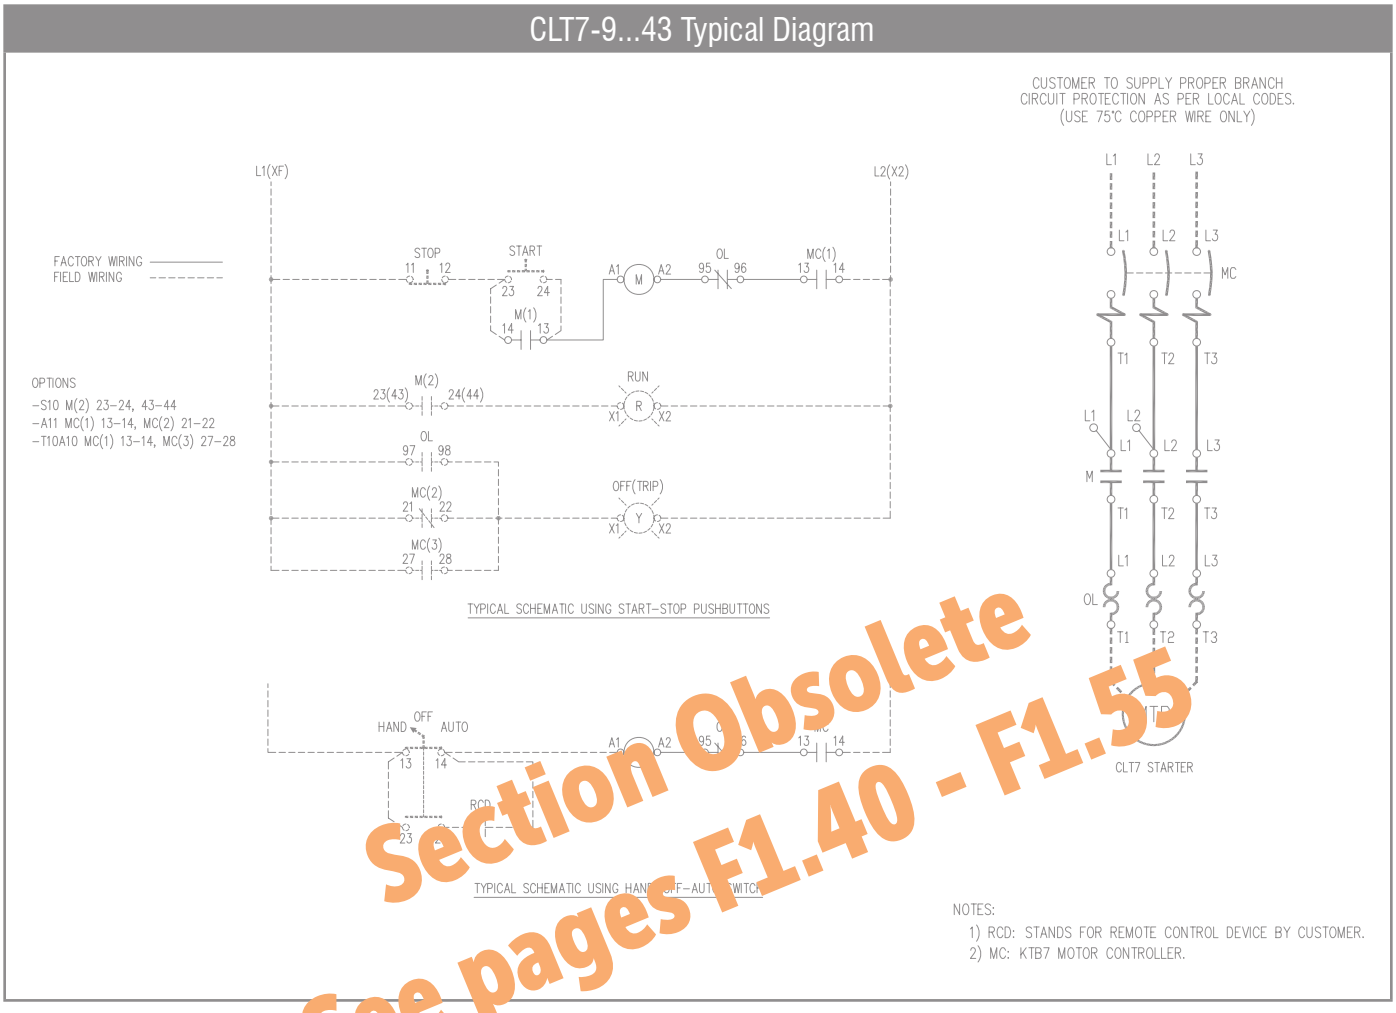

Section Obsolete
See pages F1.40 - F1.55

Ecombo Combination Starters

CL8 and CLU8 Ecombo Starters with KT7-25S

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

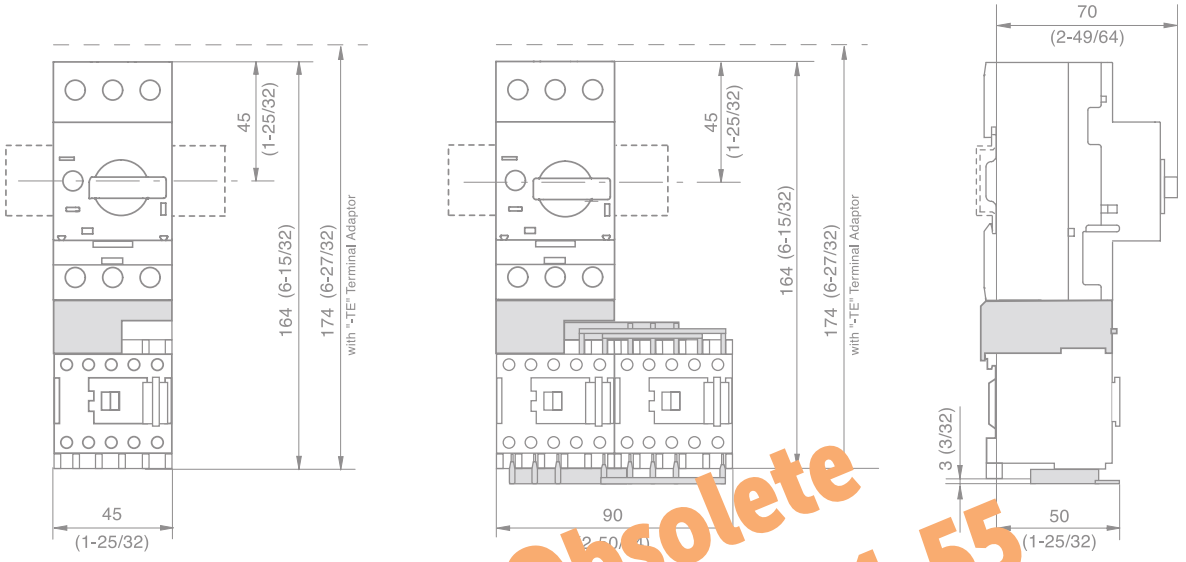

CL7-9…23(E) and CLU7-9…23(E) Ecombo Starters with KT7-25S

Section Obsolete
See pages F1.40 - F1.55

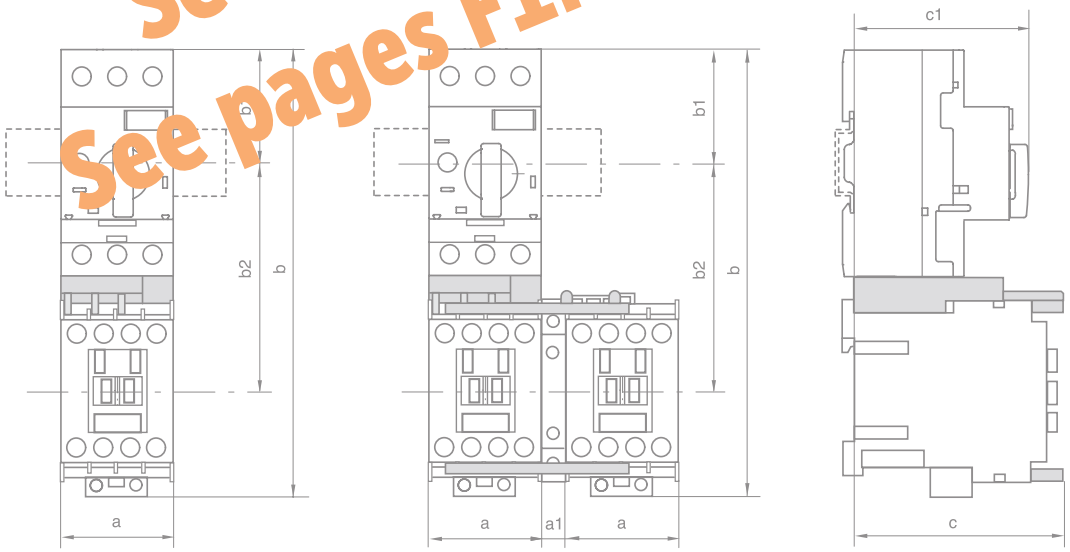

Catalog Number ❶	a	a1	b	b1	b2	c	c1
CL7-9(E)...CL7-23(E)	45 (1-25/32)	0	178 (7)	45 (1-25/32)	~	83.5 (3-19/64)	70 (2-49/64)
CL7-9(E)...CL7-23(E) with -TE1 Terminal Adaptor	45 (1-25/32)	0	188 (7-13/32)	55 (2-5/32)	~	83.5 (3-19/64)	70 (2-49/64)
CLU7-9(E)...CLU7-23(E)	45 (1-25/32)	10 (25/64)	178 (7)	45 (1-25/32)	~	83.5 (3-19/64)	70 (2-49/64)
CLU7-9(E)...CLU7-23(E) with -TE1 Terminal Adaptor	45 (1-25/32)	10 (25/64)	188 (7-13/32)	55 (2-5/32)	~	83.5 (3-19/64)	70 (2-49/64)

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Ecombo Combination Starters

CL7-30…43(E) and CLU7-30…43(E) Ecombo Starters with KT7-45H

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

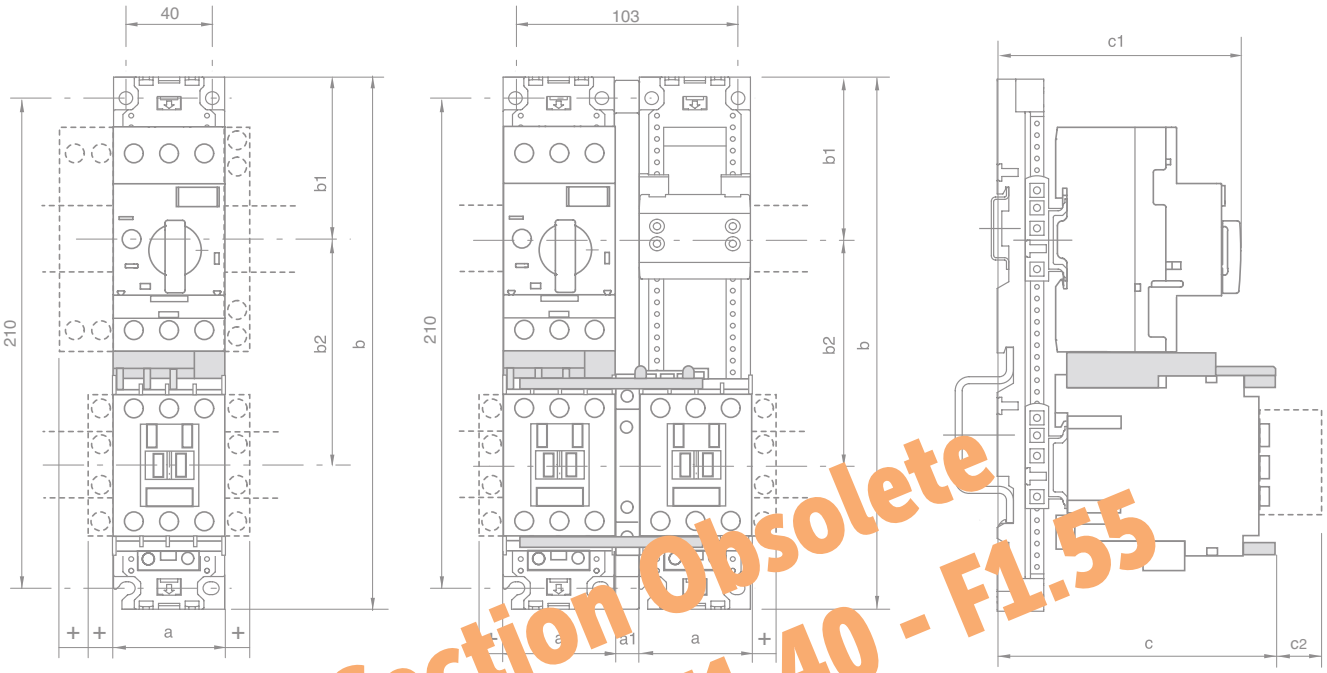

Section Obsolete
See pages F1.40 - F1.55

Catalog Number ❶❷	a	a1	b	b1	b2	c	c1	c2	+
CL7-30(E)	54 (2.125)	~	[illegible]	(2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CL7-37(E)	54 (2.125)	[illegible]	[illegible]	69 (2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CL7-43(E)	54 (2.125)	[illegible]	228 [illegible]	69 (2.72)	105 (4.30)	136 (5.35)	137 (5.39)	31 (1.22)	9
CLU7-30(E)	[illegible]	9	228 (8.97)	69 (2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CLU7-37(E)	[illegible]	9	228 (8.97)	69 (2.72)	105 (4.30)	122.5 (4.82)	134.5 (5.29)	~	9
CLU7-43(E)	54 (2.125)	9	228 (8.97)	69 (2.72)	105 (4.30)	136 (5.35)	137 (5.39)	31 (1.22)	9

❶ CL7-30..43(E) and CLU7-30..43(E) include W-32490 Mounting Module. CLU7 includes W-32955 Spacer.

❷ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V… 250V Electronic DC coils. See page A86 for details.

Ecombo*Plus* Combination Starters

CK7-9…23 and CKU7-9…23 Ecombo*Plus* Starters

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

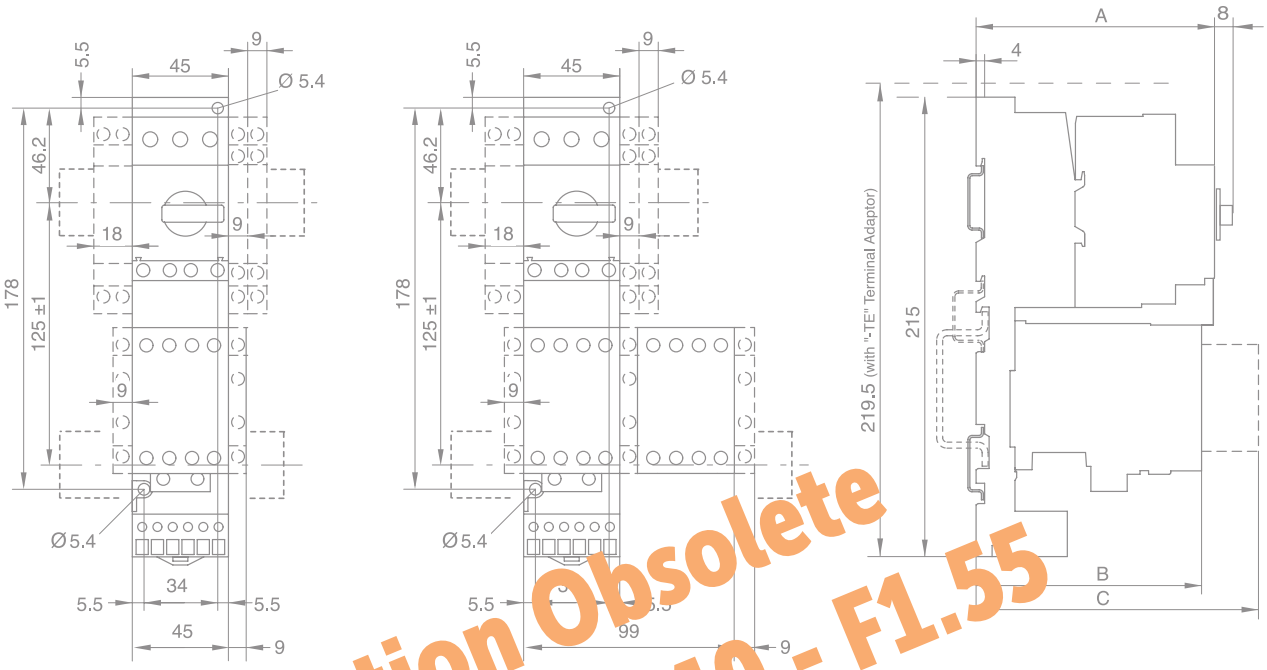

Section Obsolete
See pages F1.40 - F1.55

		A (mm)	B (mm)		C (mm)
Direct-on-line starters ❶					
CK7-9(E) CK7-12(E)	KT7-25S	112	107	CA7-PV, CS7-PV CZE-7, CZA7 CV7	138 157 160
CK7-16(E) CK7-23(E)	KT7-25H	122			
Reversing Starters					
CKU7-9 CKU7-12	KT7-25S	112	107	CA7-PV, CS7-PV CZE7, CZA7 CV7	138 157 160
CKU7-16 CKU7-23	KT7-25H	122			

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Ecombo*Plus* Combination Starters

CK7-9…23

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

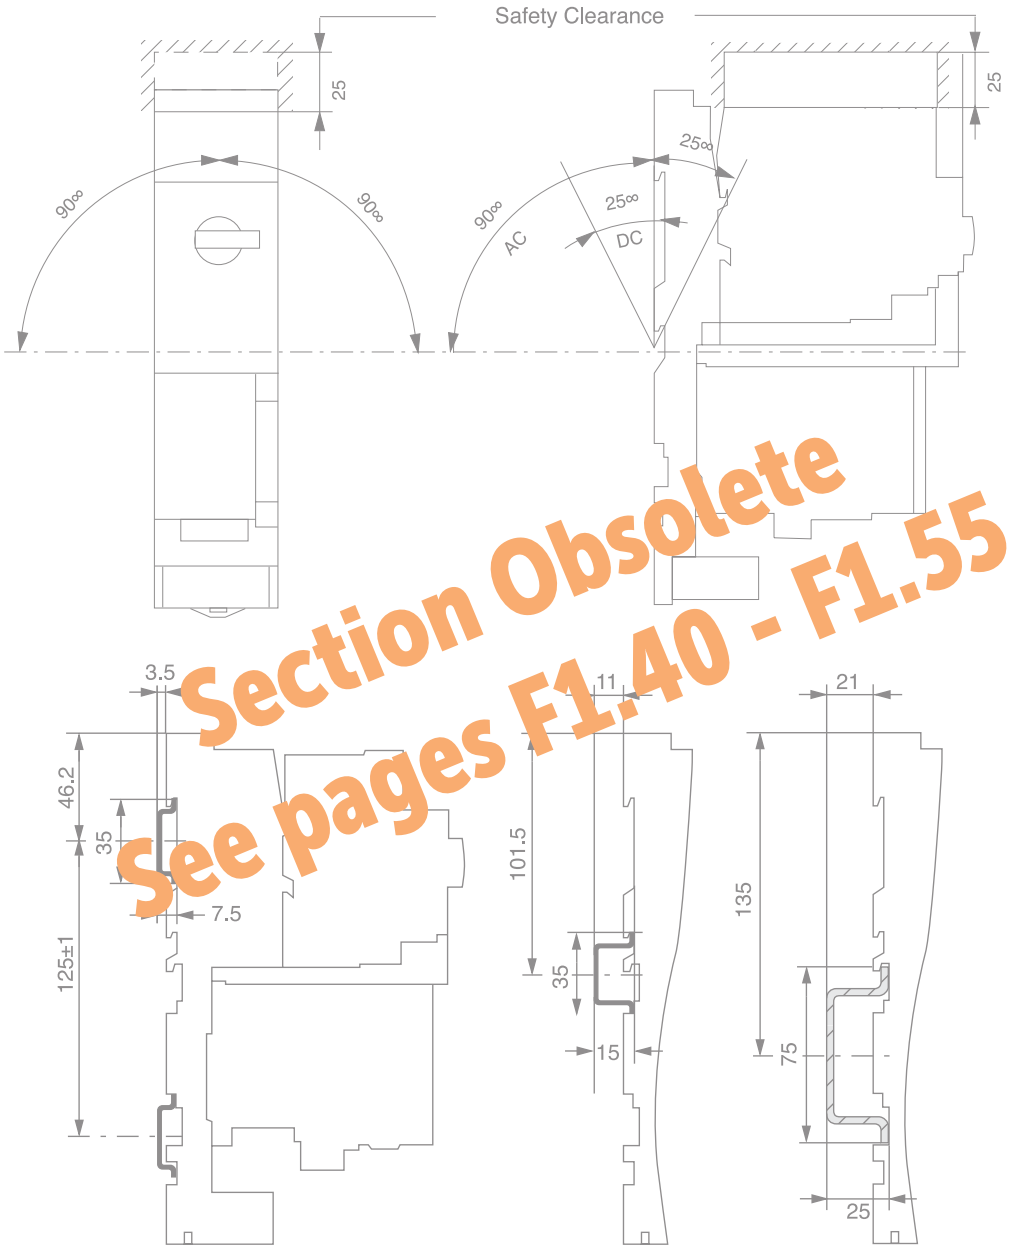

Section Obsolete
See pages F1.40 - F1.55

Ecombo*Plus* Combination Starters

CK7-30…37

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

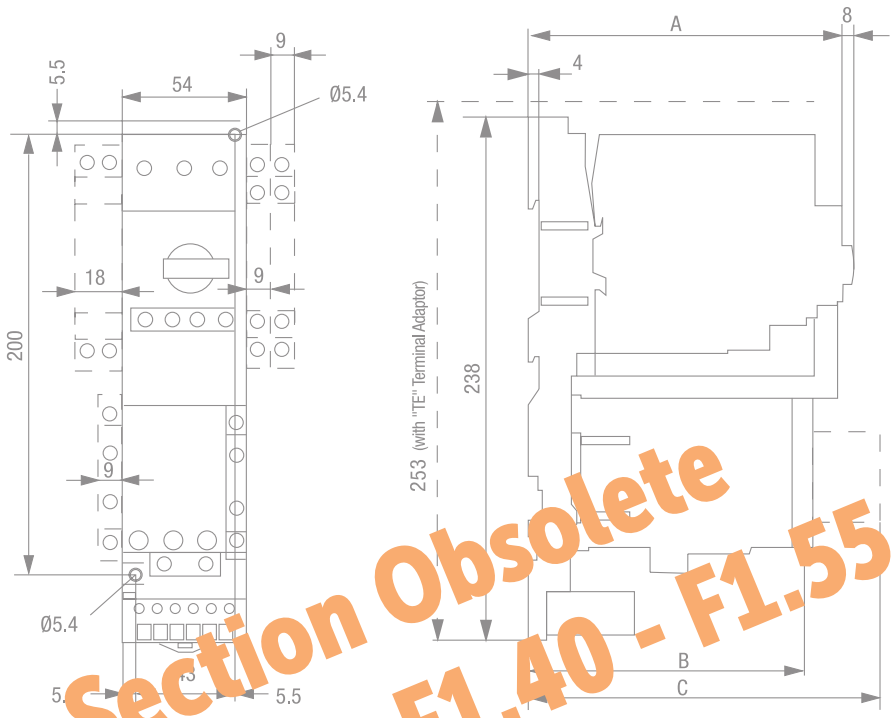

Section Obsolete
See pages F1.40 - F1.55

		A (mm)	B (mm)
CK7-30(E) ❶	KT7-45H	135	124
CK7-37(E) ❶			

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

	C (mm)
CA7-PV	154.5
CZE7	173.5
CV7	176.5

Ecombo*Plus* Combination Starters

CK7-43

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

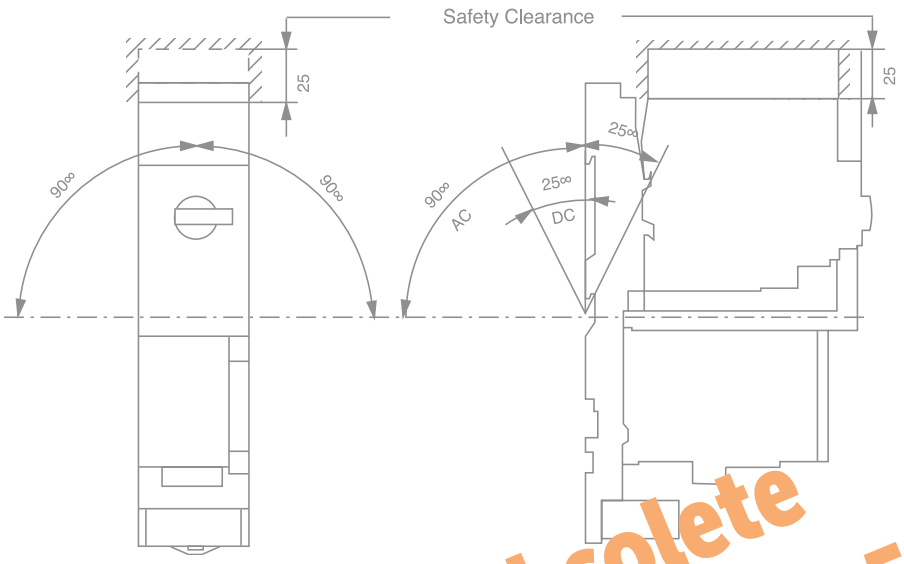

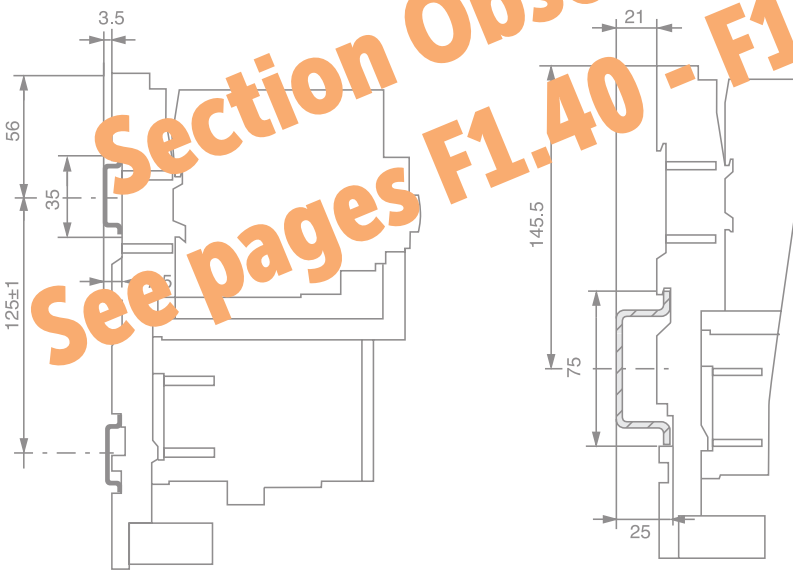

Section Obsolete
See pages F1.40 - F1.55

See previous page for dimensions A , B & C locations

		A (mm)	B (mm)
CK7-43(E) ❶	KT7-45H	135	118.5

❶ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accomodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

	C (mm)
CA7-PV	157
CZE7	176
CV7	179

Non-Reversing Three Component Combination Starters ❸

KTB7-25S + CA7-9...23 + CEP7-ED1/EE

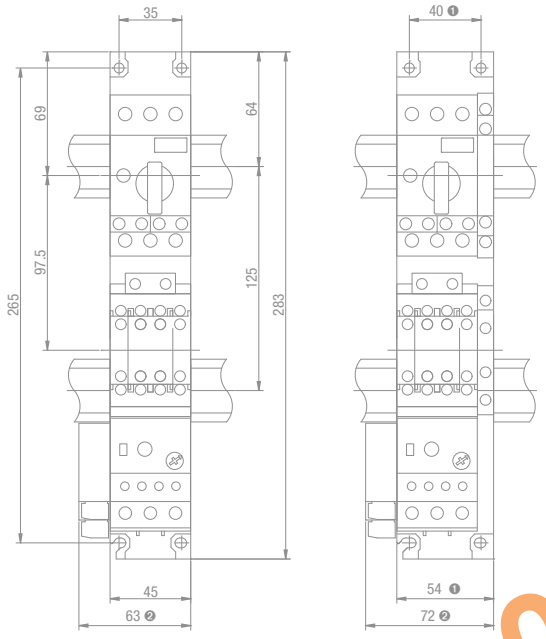

KTB7-25H + CA7-30...37 + CEP7-EE

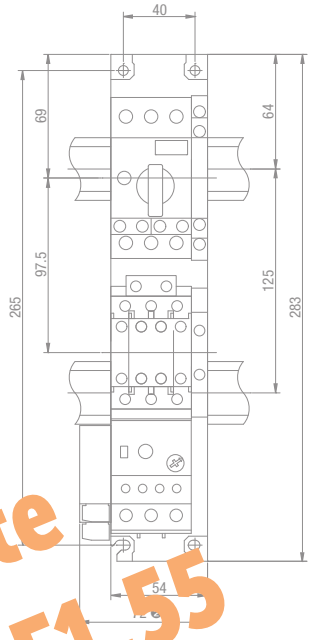

KTB7-45H + CA7-30...37 + CEP7-EE

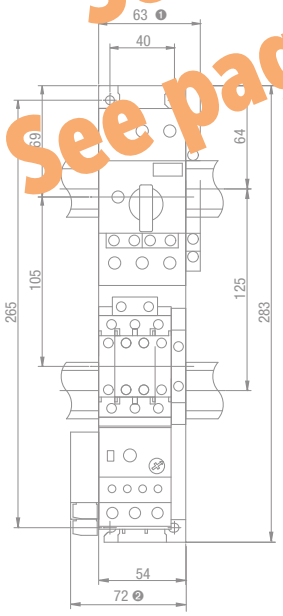

KTB7-45H + CA7-43 + CEP7-EE

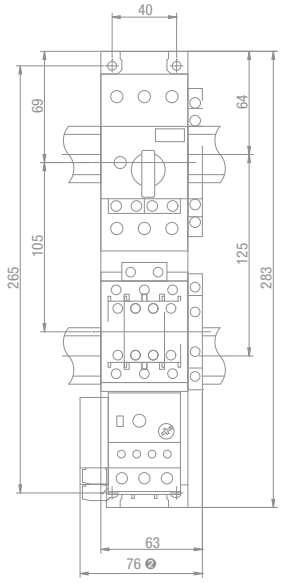

Section Obsolete
See pages F1.40 - F1.55

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

❶ With additional side mount auxiliary or trip contact(s)
❷ With CEP7-E* Side Mount Modules
❸ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Reversing Three Component Combination Starters ❷

KTB7-25S + CAU7-9...37 + CEP7-ED1/EE

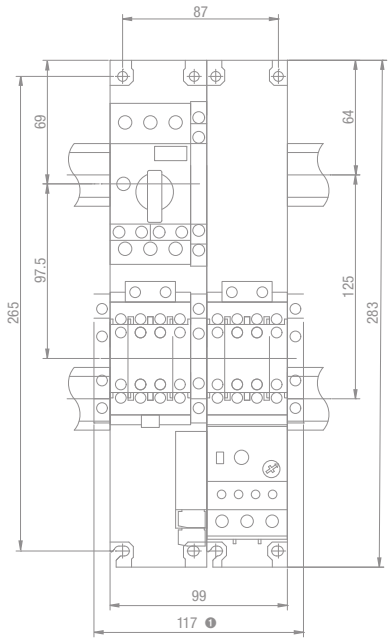

KTB7-45H + CA7-30...37 + CEP7-EE

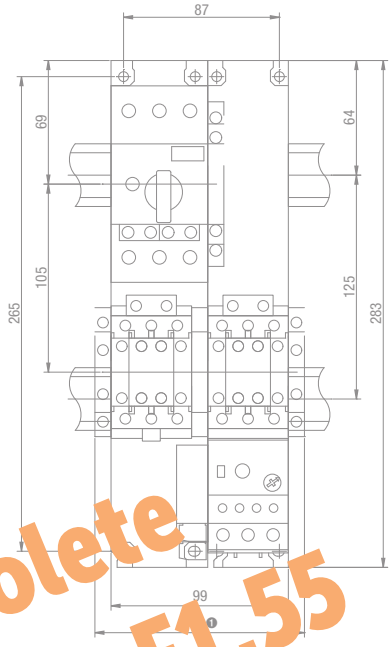

Section Obsolete
See pages F1.40 - F1.55

KTB7-45H + CA7-43 + CEP7-EE

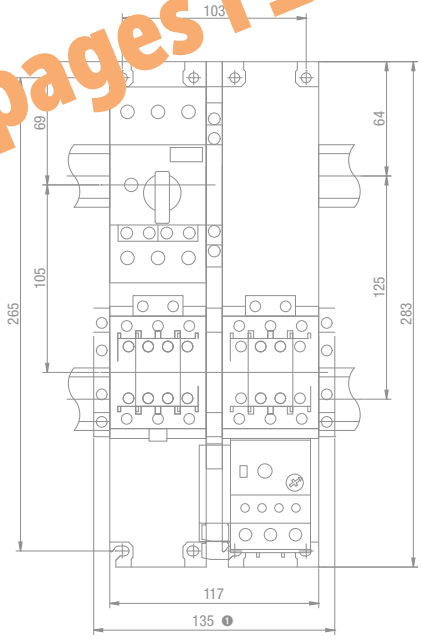

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

❶ With additional side mount auxiliary contact(s)

❷ Dimensions shown apply to AC coil contactors, or 12V or 24V Electronic DC coil contactors. Add 24 mm (1-25/32") to accommodate back pack on 36V…250V Electronic DC coils. See page A86 for details.

Notes

Section Obsolete
See pages F1.40 - F1.55

Enclosed Motor Controllers and Molded Case Circuit Breakers

KTA7 Type-E Self Protected Manual Motor Controllers
Page F89

Explosion-Proof Motor Controllers



KTA7_EX
Page F93

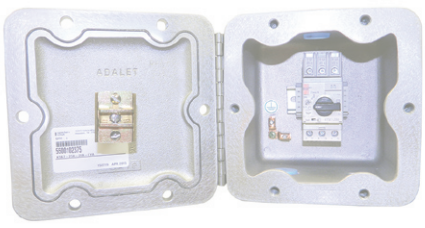

KTA7_EZ
Page F94

The following pages contain a selection of single enclosed KTA7 & KTC7 motor controllers which can be applied as an individual Manual Self-Protected Combination Motor Controller or as an individual Manual Motor Starter dependent on the ratings of the individual unit.

- A Self-protected Combination Motor Controller (UL508 Construction Type E) performs all the functions of a Manual Combo starter including a UL approved means "Disconnect" with lockable and defeatable handle mechanism, short-circuit protection and overload protection for motor applications.
- A UL508 Manual Motor Controller is a manual motor starter including a motor disconnect combined with an overload relay.

Both can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements. The section that follows includes non-metallic enclosures and explosion proof enclosures.

Enclosed Molded Case Circuit Breakers

The following pages contain a selection of individual enclosed KTU7 molded case circuit breakers for the protection of non-motor loads. KTU7 is a 480Y/277Volt or 600Y/347 volt UL489 approved circuit breaker and the selection of enclosures or combined with matching environmentally approved thru-the-door handle disconnect mechanism which also complies with UL489 standards. KTU7 offers at least 65 KAIC withstand ratings which exceeds those offered by many 600 Volt Class Molded Case Circuit Breakers which are larger and more expensive. Enclosed KTU7 can be combined with auxiliary contacts, shunt-trip or under-voltage trip units to meet your application requirements.

KTU7 Molded Case Circuit Breakers
Page F95

Enclosed Type E/F Combination Starters

KTA7 or KTC7 can be applied in combination with a CA7 contactor for remote control and an enclosure with matching environmentally approved thru-the-door handle disconnect mechanism to meet all requirements for a Construction Type E or F Combination Starter. The following pages contain a selection of individual Combo starters which are smaller and less expensive than Classic Construction Type A (Fusible), or Type B (Thermal-magnetic Molded Case Circuit Breaker) offered in Section C of this catalog. The following types are offered:

CX7 Ecombo KWIKStarters
Page F98

- Non-metallic enclosed Combo KwikStarter CX7 and CXU7 with AC or DC coils available as factory assembled or in kit form for field assembly
- Metallic enclosed Combo CX7 and CXU7with AC or DC coils
- Explosion-proof enclosed CX7 and CXU7with AC or DC coils

A variety of modifications are available.

CX7 Combination Controllers
Page F105

Section Obsolete
See pages F1.56 - F1.88

Enclosed KTA7 - IP65

Amp / Horsepower Rating								Non-metallic (IP65) Enclosure	
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Dimension Code
Single Phase		Three Phase							
115V	230V	200V	230V	460V	575V				
KTA7-25S/32S Standard Interrupting Capacity									
~	~	~	~	~	~	0.10…0.16	2.1	**KTA7-25S-0.16A-CG**	AY
~	~	~	~	~	~	0.16…0.25	3.3	**KTA7-25S-0.25A-CG**	AY
~	~	~	~	~	1/4	0.25…0.40	5.2	**KTA7-25S-0.4A-CG**	AY
~	~	~	~	1/4	1/3	0.40…0.63	8.2	**KTA7-25S-0.63A-CG**	AY
~	~	~	~	1/2	3/4	0.63…1.0	13	**KTA7-25S-1A-CG**	AY
~	1/10	1/4	1/3	1	1	1.0…1.6	21	**KTA7-25S-1.6A-CG**	AY
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	**KTA7-25S-2.5A-CG**	AY
1/8	1/3	1	1	3	3	2.5…4	52	**KTA7-25S-4A-CG**	AY
1/4	3/4	1-1/2	2	5	5 ❻	4…6	83	**KTA7-25S-6.3A-CG**	AY
1/2	1-1/2	3	3	7-1/2	10 ❻	6.3…10	130	**KTA7-25S-10A-CG**	AY
1	3	5	5	10	10 ❻	10…16	208	**KTA7-25S-16A-CG**	AY
1-1/2	3	5	7-1/2	15	20 ❻	14.5…20	260	**KTA7-25S-20A-CG**	AY
2	3	7-1/2❻	7-1/2❻	20 ❻	20 ❻	18…25	325	**KTA7-25S-25A-CG** ❻	AY
2	5	7-1/2❻	10 ❻	20 ❻	25 ❻	23…29	409	**KTA7-32S-29A-CG** ❻	AY
3	5	7-1/2❻	15 ❻	25 ❻	30 ❻	27…32	448	**KTA7-32S-32A-CG** ❻	AY

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Non-metallic (IP65) enclosure with integrated IP65 operator – watertight, dusttight
- KT7-25S/32S (Standard Interrupting Capacity) "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- Gray and black IP65 handle ❹❺

Enclosure Only

Description	Catalog Number
Gray/Black handle	**KT7-AYTG2**
Red/Yellow handle	**KT7-AYTJ2**
Accessory	
Ground (PE) Terminal	**KS7-AYMTN**

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT7 Auxiliary and Trip Contacts, Front Mount 300V max.	
No Auxiliary	**-A10**
1 NC Auxiliary	**-A01**
1 NO + 1 NC Auxiliary	**-A11**
2 NO Auxiliaries	**-A20**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT7 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Accessories	
Undervoltage Release Module	**-UA-✱**
Shunt Release Module	**-AA-✱**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "CG" suffix to "CJ". Ex: Change KTA7-25S-0.16-CG to KTA7-25S-0.16-CJ.

❺ Handles are built-in to the enclosure and are not available as components.

❻ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	21V	24V
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

Enclosed KTA7 - Type 4 / 4X / 12

Amp / Horsepower Rating

Non-metallic, Type 4 / 4X / 12 Enclosure



Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Dimension Code
Single Phase		Three Phase							
115V	230V	200V	230V	460V	575V				
KTA7-25S/32S Standard Interrupting Capacity									
~	~	~	~	~	~	0.10…0.16	2.1	KTA7-25S-0.16A-VG	Q5
~	~	~	~	~	~	0.16…0.25	3.3	KTA7-25S-0.25A-VG	Q5
~	~	~	~	~	1/4	0.25…0.40	5.2	KTA7-25S-0.4A-VG	Q5
~	~	~	~	1/4	1/3	0.40…0.63	8.2	KTA7-25S-0.63A-VG	Q5
~	~	~	~	1/2	3/4	0.63…1.0	13	KTA7-25S-1A-VG	Q5
~	1/10	1/4	1/3	1	1	1.0…1.6	21	KTA7-25S-1.6A-VG	Q5
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25S-2.5A-VG	Q5
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25S-4A-VG	Q5
1/4	3/4	1-1/2	2	5	5 ❺	4…6.3	82	KTA7-25S-6.3A-VG	Q5
1/2	1-1/2	3	3	7-1/2	10 ❺	6.3…10	130	KTA7-25S-10A-VG	Q5
1	3	5	5	10	15 ❺	10…16	208	KTA7-25S-16A-VG	Q5
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25S-20A-VG	Q5
2	3	7-1/2❻	7-1/2 ❺	20 ❺	20 ❺	18…25	325	KTA7-25S-25A-VG ❺	Q5
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32S-29A-VG ❺	Q5
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32S-32A-VG ❺	Q5
KTA7-25H/32H High Interrupting Capacity									
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25H-2.5A-VG	Q6
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25H-4A-VG	Q6
1/4	1/2	1-1/2	2	5	5	4…6.3	82	KTA7-25H-6.3A-VG	Q6
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	KTA7-25H-10A-VG	Q6
1	3	5	5	10	15	10…16	208	KTA7-25H-16A-VG	Q6
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25H-20A-VG	Q6
2	3	7-1/2	7-1/2	20	20 ❺	18…25	325	KTA7-25H-25A-VG	Q6
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32H-29A-VG ❺	Q6
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32H-32A-VG ❺	Q6
KTA7-45H High Interrupting Capacity									
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3…10	130	KTA7-45H-10A-VG	Q7
1	3	5	5	10	10	10…16	208	KTA7-45H-16A-VG	Q7
1-1/2	3	5	7-1/2	15	15	14.5…20	260	KTA7-45H-20A-VG	Q7
2	3	~	10	20	20	18…25	325	KTA7-45H-25A-VG	Q7
3	5	7-1/2	10	25	30	23…32	416	KTA7-45H-32A-VG	Q7
3	7-1/2	10	15	30	40 ❺	32…45	585	KTA7-45H-45A-VG	Q7

Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTA7 "Type E" Self-protected Combination Manual Controller (Standard Interrupting Capacity) ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.	
1 NO Auxiliary	-A10
1 NC Auxiliary	-A01
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NC+OL + 1 NC	-T10A01
1 NC+OL + 1 NO	-T10A10
Side Mount 600V max.	
2 NC Auxiliaries	-AS02
2 NO Auxiliaries	-AS20
1 NO + 1 NC Auxiliary	-AS11
Additional KT7 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	-R00
1 NO SC+OL+1 NC SC	-R01
1 NC SC+OL+1 NO SC	-R10
Accessories	
Undervoltage Release Module	-UA-✱
Shunt Release Module	-AA-✱

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	21V	24V
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

Section Obsolete
See pages F1.56 - F1.88

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "VG" suffix to "VJ". Ex: Change KTA7-25S-0.16-**VG** to KTA7-25S-0.16-**VJ**.

❺ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA7 - Type 12

Amp / Horsepower Rating									Painted Steel, Type 12 Enclosure
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Dimension Code
Single Phase		Three Phase							
115V	230V	200V	230V	460V	575V				
KTA7-25S/32S Standard Interrupting Capacity									
~	~	~	~	~	~	0.10…0.16	2.1	KTA7-25S-0.16A-DG	L
~	~	~	~	~	~	0.16…0.25	3.3	KTA7-25S-0.25A-DG	L
~	~	~	~	~	1/4	0.25…0.40	5.2	KTA7-25S-0.4A-DG	L
~	~	~	~	1/4	1/3	0.40…0.63	8.2	KTA7-25S-0.63A-DG	L
~	~	~	~	1/2	3/4	0.63…1.0	13	KTA7-25S-1A-DG	L
~	1/10	1/4	1/3	1	1	1.0…1.6	21	KTA7-25S-1.6A-DG	L
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25S-2.5A-DG	L
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25S-4A-DG	L
1/4	3/4	1-1/2	2	5	5 ❺	4…6.3	82	KTA7-25S-6.3A-DG	L
1/2	1-1/2	3	3	7-1/2	10 ❺	6.3…10	130	KTA7-25S-10A-DG	L
1	3	5	5	10	15	10…16	208	KTA7-25S-16A-DG	L
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25S-20A-DG	L
2	3	7-1/2 ❺	7-1/2 ❺	20 ❺	20 ❺	18…25	325	KTA7-25S-25A-DG ❺	L
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32S-29A-DG ❺	L
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32S-32A-DG ❺	L
KTA7-25H/32H High Interrupting Capacity									
1/10	1/6	1/2	1/2	1-1/2	2	1.6…2.5	33	KTA7-25H-2.5A-DG	L
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25H-4A-DG	L
1/4	1/2	1-1/2	2	5	5	4…6.3	82	KTA7-25H-6.3A-DG	L
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	KTA7-25H-10A-DG	L
1	3	5	5	10	15	10…16	208	KTA7-25H-16A-DG	L
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25H-20A-DG	L
2	3	7-1/2	7-1/2	20	20 ❺	18…25	325	KTA7-25H-25A-DG	L
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32H-29A-DG ❺	L
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32H-32A-DG ❺	L

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Type 12 enclosure – dusttight
- KT7-25S/32S (Standard Interrupting Capacity) "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.	
1 NO Auxiliary	-A10
1 NC Auxiliary	-A01
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NO SC+OL + 1 NC	-T10A01
1 NO SC+OL + 1 NO	-T10A10
Side Mount 600V max.	
2 NC Auxiliary	-AS02
2 NO Auxiliary	-AS20
1 NO + 1 NC Auxiliary	-AS11
Additional KT7 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	-R00
1 NO SC+OL+1 NC SC	-R01
1 NC SC+OL+1 NO SC	-R10
Accessories	
Undervoltage Release Module	-UA-✱
Shunt Release Module	-AA-✱

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	21V	24V
28V	24V	28V
120V	105V	120V
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "DG" suffix to "DJ". Ex: Change KTA7-25S-0.16-DG to KTA7-25S-0.16-DJ.

❺ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTA7 - Type 4 / 12

Painted Steel, Type 4 / 12 Enclosure



Amp / Horsepower Rating									
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number ❹	Dimension Code
Single Phase		Three Phase							
115V	230V	200V	230V	460V	575V				
KTA7-25S/32S Standard Interrupting Capacity									
~	~	~	~	~	~	0.10…0.16	2.1	KTA7-25S-0.16A-WG	W6
~	~	~	~	~	~	0.16…0.25	3.3	KTA7-25S-0.25A-WG	W6
~	~	~	~	~	1/4	0.25…0.40	5.2	KTA7-25S-0.4A-WG	W6
~	~	~	~	1/4	1/3	0.40…0.63	8.2	KTA7-25S-0.63A-WG	W6
~	~	~	~	1/2	3/4	0.63…1.0	13	KTA7-25S-1A-WG	W6
~	1/10	1/4	1/3	1	1	1.0…1.6	21	KTA7-25S-1.6A-WG	W6
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25S-2.5A-WG	W6
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25S-4A-WG	W6
1/4	3/4	1-1/2	2	5	5 ❺	4…6.3	82	KTA7-25S-6.3A-WG	W6
1/2	1-1/2	3	3	7-1/2	10 ❺	6.3…10	130	KTA7-25S-10A-WG	W6
1	3	5	5	10	15 ❺	10…16	208	KTA7-25S-16A-WG	W6
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25S-20A-WG	W6
2	3	7-1/2 ❺	7-1/2 ❺	20 ❺	20 ❺	18…25	325	KTA7-25S-25A-WG ❺	W6
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32S-29A-WG ❺	W6
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32S-32A-WG ❺	W6
KTA7-25H/32H High Interrupting Capacity									
1/10	1/6	1/2	3/4	1-1/2	2	1.6…	33	KTA7-25H-2.5A-WG	W6
1/8	1/3	1	1	3	3	2.5…	52	KTA7-25H-4A-WG	W6
1/4	1/2	1-1/2	2	5	10	…6.3	82	KTA7-25H-6.3A-WG	W6
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	KTA7-25H-10A-WG	W6
1	3	5	5	10	15	10…16	208	KTA7-25H-16A-WG	W6
1-1/2	3	5	7-1/2	15	20 ❺	14.5…20	260	KTA7-25H-20A-WG	W6
2	3	7-1/2	7-1/2	20	20 ❺	18…25	325	KTA7-25H-25A-WG	W6
2	5	7-1/2 ❺	10 ❺	20 ❺	25 ❺	24…29	406	KTA7-32H-29A-WG ❺	W6
3	5	7-1/2 ❺	10 ❺	25 ❺	30 ❺	27…32	448	KTA7-32H-32A-WG ❺	W6
KTA7-45H High Interrupting Capacity									
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3…10	130	KTA7-45H-10A-WG	R/F
1	3	5	5	10	10	10…16	208	KTA7-45H-16A-WG	R/F
1-1/2	3	5	7-1/2	15	15	14.5…20	260	KTA7-45H-20A-WG	R/F
2	3	~	10	20	20	18…25	325	KTA7-45H-25A-WG	R/F
3	5	7-1/2	10	25	30	23…32	416	KTA7-45H-32A-WG	R/F
3	7-1/2	10	15	30	40 ❺	32…45	585	KTA7-45H-45A-WG	R/F

Includes:

- Type 4 / 12 enclosure – watertight, dusttight
- KT7-25S/32S (Standard Interrupting Capacity) "Type E" Self-protected Combination Manual Controller ❺
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.	
1 NO Auxiliary	**-A10**
1 NC Auxiliary	**-A01**
1 NO + 1 NC Auxiliary	**-A11**
2 NO Auxiliaries	**-A20**
1 NO SC+OL + 1 NC	**-T10A01**
1 NO SC+OL + 1 NO	**-T10A10**
Side Mount 600V max.	
2 NC Auxiliaries	**-AS02**
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
Additional KT7 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	**-R00**
1 NO SC+OL+1 NC SC	**-R01**
1 NC SC+OL+1 NO SC	**-R10**
Accessories	
Undervoltage Release Module	**-UA-✱**
Shunt Release Module	**-AA-✱**

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	21V	24V
28V	24V	28V
120V	**105V**	**120V**
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

Section Obsolete
See pages F1.56 - F1.88

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change KTA7-25S-0.16-WG to KTA7-25S-0.16-WJ.

❺ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

KTA7 Explosion Proof Motor Controllers - NEMA Type 7/9

Amp / Horsepower Rating									
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number	Dimension Code
Single Phase		Three Phase							
115V	230V	200V	230V	460V	575V				
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	~	~	0.10…0.16	2.1	KTA7-25S-0.16A-EX	EX
~	~	~	~	~	~	0.16…0.25	3.3	KTA7-25S-0.25A-EX	EX
~	~	~	~	~	1/4	0.25…0.40	5.2	KTA7-25S-0.4A-EX	EX
~	~	~	~	1/4	1/3	0.40…0.63	8.2	KTA7-25S-0.63A-EX	EX
~	~	~	~	1/2	3/4	0.63…1.0	13	KTA7-25S-1A-EX	EX
~	1/10	1/4	1/3	1	1	1.0…1.6	21	KTA7-25S-1.6A-EX	EX
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25S-2.5A-EX	EX
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25S-4A-EX	EX
1/4	3/4	1-1/2	2	5	5 ❹	4…6.3	82	KTA7-25S-6.3A-EX	EX
1/2	1-1/2	3	3	7-1/2	10 ❹	6.3…10	130	KTA7-25S-10A-EX	EX
1	3	5	5	10	15 ❹	10…16	208	KTA7-25S-16A-EX	EX
1-1/2	3	5	7-1/2	15	20 ❹	14.5…20	260	KTA7-25S-20A-EX	EX
2	3	7-1/2 ❹	7-1/2 ❹	20 ❹	25 ❹	18…25	325	KTA7-25S-25A-EX	EX
2	5	7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	416	KTA7-32S-29A-EX	EX
3	5	7-1/2 ❹	10 ❹	25 ❹	30 ❹	29…32	448	KTA7-32S-32A-EX	EX

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Class I, Div 1, 2, Group C, D
  Class II, Div 1, 2, Group E, F & G enclosure
  Class III
  NEMA Type 7/9
- KT7-25S/32S (Standard interrupting capacity) "Type E" Self-protected Combination Manual Motor Controller ❹
- Terminal Adaptor for Type E Applications
  (Cat.# KT7-25-TE1)

Modifications (Factory Assembled) ❺

KT7 Auxiliaries & Trip Contacts	Add Suffix to Cat. Number
Front Mount 300V max.	
1 NO Auxiliary	**-A10**
1 NC Auxiliary	**-A01**
1 NO + 1 NC Auxiliary	**-A11**
2 NO Auxiliaries	**-A20**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**
Side Mount 600V max.	
1 NO + 1 NC Auxiliary	**-AS11**
2 NO Auxiliaries	**-AS20**
1 NC SC+OL + 1 NO Auxiliary	**-R10**
1 NC SC+OL + 1 NC Auxiliary	**-R11**
Enclosure Modifications	
Breather/Drain	**-BD**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. Refer to page F5 for applied KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote 1 for device selection criteria.

❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

❺ -UA✱ and -AA✱ options not possible in the -EX Enclosure.

KTA7 Explosion Proof Motor Controllers – NEMA Type 4/7/9 with Gasket



EY Enclosure shown

Amp / Horsepower Rating									
Max. Horsepower ❶❷❸						O/L Relay Ampere Range	Magnetic Res. Current	Catalog Number	Dimension Code
Single Phase		Three Phase							
115V	230V	200V	230V	460V	575V				
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	~	~	0.10…0.16	2.1	KTA7-25S-0.16A-EY	EY
~	~	~	~	~	~	0.16…0.25	3.3	KTA7-25S-0.25A-EY	EY
~	~	~	~	~	1/4	0.25…0.40	5.2	KTA7-25S-0.4A-EY	EY
~	~	~	~	1/4	1/3	0.40…0.63	8.2	KTA7-25S-0.63A-EY	EY
~	~	~	~	1/2	3/4	0.63…1.0	13	KTA7-25S-1A-EY	EY
~	1/10	1/4	1/3	1	1	1.0…1.6	21	KTA7-25S-1.6A-EY	EY
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25S-2.5A-EY	EY
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25S-4A-EY	EY
1/4	3/4	1-1/2	2	5	5 ❹	4…6.3	82	KTA7-25S-6.3A-EY	EY
1/2	1-1/2	3	3	7-1/2	10 ❹	6.3…10	130	KTA7-25S-10A-EY	EY
1	3	5	5	10	15 ❹	10…16	208	KTA7-25S-16A-EY	EY
1-1/2	3	5	7-1/2	15	20 ❹	14.5…20	260	KTA7-25S-20A-EY	EY
2	3	7-1/2 ❹	7-1/2 ❹	20 ❹	20 ❹	18…25	325	KTA7-25S-25A-EY	EY
2	5	7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	406	KTA7-32S-29A-EY	EY
3	5	7-1/2 ❹	10 ❹	25 ❹	30 ❹	27…32	448	KTA7-32S-32A-EY	EY
KTA7-25H High Interrupting Capacity									
1/10	1/6	1/2	3/4	1-1/2	2	1.6…2.5	33	KTA7-25H-2.5A-EY	EY
1/8	1/3	1	1	3	3	2.5…4	52	KTA7-25H-4A-EY	EY
1/4	1/2	1-1/2	2	5	5	4…6.3	82	KTA7-25H-6.3A-EY	EY
1/2	1-1/2	3	3	7-1/2	10	6.3…10	130	KTA7-25H-10A-EY	EY
1	3	5	5	10	15	10…16	208	KTA7-25H-16A-EY	EY
1-1/2	3	5	7-1/2	15	20 ❹	14.5…20	260	KTA7-25H-20A-EY	EY
2	3	7-1/2	7-1/2	20	20 ❹	18…25	325	KTA7-25H-25A-EY	EY
2	5	7-1/2 ❹	10 ❹	20 ❹	25 ❹	24…29	406	KTA7-32H-29A-EY	EY
3	5	7-1/2 ❹	10 ❹	25 ❹	30 ❹	27…32	448	KTA7-32H-32A-EY	EY
KTA7-45H High Interrupting Capacity									
1/2	1-1/2	3	3	7-1/2	7-1/2	6.3…10	130	KTA7-45H-10A-EZ	EZ
1	3	5	5	10	10	10…16	208	KTA7-45H-16A-EZ	EZ
1-1/2	3	5	7-1/2	15	15	14.5…20	260	KTA7-45H-20A-EZ	EZ
2	3	~	10	20	20	18…25	325	KTA7-45H-25A-EZ	EZ
3	5	7-1/2	10	25	30	23…32	416	KTA7-45H-32A-EZ	EZ
3	7-1/2	10	15	30	40 ❹	32…45	585	KTA7-45H-45A-EZ	EZ

Includes:

- Class I, Div 1, 2, Group C, D
  Class II, Div 1, 2, Group E, F & G enclosure
  Class III
- NEMA Type 4/7/9
- KT7 "Type E" Self-protected Combination Manual Motor Controller ❹
- Terminal Adaptor for Type E Applications
  (Cat.# KT7-25-TE1 or KT7-45-TE)

Modifications (Factory Assembled)

Description	Add Suffix to Cat. Number
KT7 Auxiliaries & Trip Contacts, Front Mount 300V max.	
1 NO Auxiliary	-A10
1 NC Auxiliary	-A01
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NO SC+OL + 1	-T10A01
1 NO SC+OL + 1	-T10A10
Side Mount 600V max.	
2 NO Auxiliaries	-AS02
2 NO Auxiliaries	-AS20
1 NO + 1 NC Auxiliary	-AS11
Additional KT7 Trip Contacts, Side Mount 600V max.	
1 NO SC+OL+1 NO SC	-R00
1 NO SC+OL+1 NC SC	-R01
1 NC SC+OL+1 NO SC	-R10
Accessories	
Undervoltage Release Module	-UA-✱
Shunt Release Module	-AA-✱
Enclosure Modifications	
Breather/Drain	-BD

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24V	21V	24V
28V	24V	28V
120V	105V	120V
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V

Section Obsolete
See pages F1.56 - F1.88

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range. See page F5 for KAIC ratings.

❸ KTA7 may be applied to single phase loads if 3 poles of device are wired in series. See footnote ❶ for device selection criteria.

❹ Catalog numbers with specific voltages (i.e. @ 575V) shaded in gray are suitable for use as a manual motor starter only because they are not Type E rated. See page F5 for ratings.

Enclosed KTU7 Circuit Breaker - Type 4 / 4X / 12

Amp / Interrupt Rating					Non-metallic, Type 4 / 4X / 12 Enclosure	
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Dimension Code
KTU7-D — High Interrupting Capacity – 2-Pole						
0.5	15…20xIn	100	100	50	KTU7-D-2D-0.5-VG	
1.0	15…20xIn	100	100	50	KTU7-D-2D-1-VG	
2.0	15…20xIn	100	100	50	KTU7-D-2D-2-VG	
3.0	15…20xIn	100	100	50	KTU7-D-2D-3-VG	
4.0	15…20xIn	100	100	50	KTU7-D-2D-4-VG	
5.0	15…20xIn	100	100	50	KTU7-D-2D-5-VG	
6.0	15…20xIn	100	100	50	KTU7-D-2D-6-VG	Q6 ❶
8.0	15…20xIn	100	100	50	KTU7-D-2D-8-VG	
10.0	15…20xIn	100	100	50	KTU7-D-2D-10-VG	
12.0	15…20xIn	65	65	25	KTU7-D-2D-12-VG	
15.0	15…20xIn	65	65	25	KTU7-D-2D-15-VG	
20.0	15…20xIn	65	65	25	KTU7-D-2D-20-VG	
25.0	15…20xIn	65	65	25	KTU7-D-2D-25-VG	
30.0	15…20xIn	65	65	25	KTU7-D-2D-30-VG	
KTU7-D — High Interrupting Capacity – 3-Pole						
0.5	15…20xIn	100	100	50	KTU7-D-3D-0.5-VG	
1.0	15…20xIn	100	100	50	KTU7-D-3D-1-VG	
2.0	15…20xIn	100	100	50	KTU7-D-3D-2-VG	
3.0	15…20xIn	100	100	50	KTU7-D-3D-3-VG	
4.0	15…20xIn	100	100	50	KTU7-D-3D-4-VG	
5.0	15…20xIn	100	100	50	KTU7-D-3D-5-VG	
6.0	15…20xIn	100	100	50	KTU7-D-3D-6-VG	Q6 ❶
8.0	15…20xIn	100	100	50	KTU7-D-3D-8-VG	
10.0	15…20xIn	100	100	50	KTU7-D-3D-10-VG	
12.0	15…20xIn	65	65	25	KTU7-D-3D-12-VG	
15.0	15…20xIn	65	65	25	KTU7-D-3D-15-VG	
20.0	15…20xIn	65	65	25	KTU7-D-3D-20-VG	
25.0	15…20xIn	65	65	25	KTU7-D-3D-25-VG	
30.0	15…20xIn	65	65	25	KTU7-D-3D-30-VG	

Includes:

- Type 4 / 4X / 12 enclosure – watertight, dusttight, corrosion resistant
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ❷

Modifications (Factory Assembled) ❸

KTU7 Auxiliaries & Trip Contacts - Front Mount 300V max.	Add Suffix to Cat. Number
1 NO Auxiliary	-A10
1 NC Auxiliary	-A01
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NO SC+OL + 1 NC Auxiliary	-T10A01
1 NO SC+OL + 1 NO Auxiliary	-T10A10

Section Obsolete
See pages F1.56 - F1.88

❶ KTU7 is 80% rated in this enclosure.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "VG" suffix to "VJ". Ex: Change KTU7-D-2D-0.16-VG to KTU7-D-2D-0.16-VJ.
❸ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed KTU7 Circuit Breaker - Type 12

Amp / Interrupt Rating					Painted Steel, Type 12 Enclosure	
❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Dimension Code
KTU7-D — High Interrupting Capacity – 2-Pole						
0.5	15…20xIn	100	100	50	**KTU7-D-2D-0.5-DG**	L ❶
1.0	15…20xIn	100	100	50	**KTU7-D-2D-1-DG**	
2.0	15…20xIn	100	100	50	**KTU7-D-2D-2-DG**	
3.0	15…20xIn	100	100	50	**KTU7-D-2D-3-DG**	
4.0	15…20xIn	100	100	50	**KTU7-D-2D-4-DG**	
5.0	15…20xIn	100	100	50	**KTU7-D-2D-5-DG**	
6.0	15…20xIn	100	100	50	**KTU7-D-2D-6-DG**	
8.0	15…20xIn	100	100	50	**KTU7-D-2D-8-DG**	
10.0	15…20xIn	100	100	50	**KTU7-D-2D-10-DG**	
12.0	15…20xIn	65	65	25	**KTU7-D-2D-12-DG**	
15.0	15…20xIn	65	65	25	**KTU7-D-2D-15-DG**	
20.0	15…20xIn	65	65	25	**KTU7-D-2D-20-DG**	
25.0	15…20xIn	65	65	25	**KTU7-D-2D-25-DG**	
30.0	15…20xIn	65	65	25	**KTU7-D-2D-30-DG**	
KTU7-D — High Interrupting Capacity – 3-Pole						
0.5	15…20xIn	100	100	50	**KTU7-D-3D-0.5-DG**	L ❶
1.0	15…20xIn	100	100	50	**KTU7-D-3D-1-DG**	
2.0	15…20xIn	100	100	50	**KTU7-D-3D-2-DG**	
3.0	15…20xIn	100	100	50	**KTU7-D-3D-3-DG**	
4.0	15…20xIn	100	100	50	**KTU7-D-3D-4-DG**	
5.0	15…20xIn	100	100	50	**KTU7-D-3D-5-DG**	
6.0	15…20xIn	100	100	50	**KTU7-D-3D-6-DG**	
8.0	15…20xIn	100	100	50	**KTU7-D-3D-8-DG**	
10.0	15…20xIn	100	100	50	**KTU7-D-3D-10-DG**	
12.0	15…20xIn	65	65	25	**KTU7-D-3D-12-DG**	
15.0	15…20xIn	65	65	25	**KTU7-D-3D-15-DG**	
20.0	15…20xIn	65	65	25	**KTU7-D-3D-20-DG**	
25.0	15…20xIn	65	65	25	**KTU7-D-3D-25-DG**	
30.0	15…20xIn	65	65	25	**KTU7-D-3D-30-DG**	

Includes:

- Type 12 enclosure – dusttight
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ❷

Modifications (Factory Assembled) ❸

KT7 Auxiliaries & Trip Contacts - Front Mount 600V max.	Add Suffix to Cat. Number
1 NO Auxiliary	**-A10**
1 NC Auxiliary	**-A01**
1 NO + 1 NC Auxiliary	**-A11**
2 NO Auxiliaries	**-A20**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**

Section Obsolete
See pages F1.56 - F1.88

❶ KTU7 is 80% rated in this enclosure.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "DG" suffix to "DJ". Ex: Change KTU7-D-2D-0.16-**DG** to KTU7-D-2D-0.16-**DJ**.
❸ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed KTU7 Circuit Breaker - Type 4 / 12

❶ Fixed Thermal Current Rating [A]	Magnetic Trip [A]	Interrupting Rating (60Hz) [KA] 240V	480Y /277V	600Y /347V	Catalog Number	Dimension Code
KTU7-D — High Interrupting Capacity – 2-Pole						
0.5	15…20xIn	100	100	50	KTU7-D-2D-0.5-WG	W6 ❶
1.0	15…20xIn	100	100	50	KTU7-D-2D-1-WG	
2.0	15…20xIn	100	100	50	KTU7-D-2D-2-WG	
3.0	15…20xIn	100	100	50	KTU7-D-2D-3-WG	
4.0	15…20xIn	100	100	50	KTU7-D-2D-4-WG	
5.0	15…20xIn	100	100	50	KTU7-D-2D-5-WG	
6.0	15…20xIn	100	100	50	KTU7-D-2D-6-WG	
8.0	15…20xIn	100	100	50	KTU7-D-2D-8-WG	
10.0	15…20xIn	100	100	50	KTU7-D-2D-10-WG	
12.0	15…20xIn	65	65	25	KTU7-D-2D-12-WG	
15.0	15…20xIn	65	65	25	KTU7-D-2D-15-WG	
20.0	15…20xIn	65	65	25	KTU7-D-2D-20-WG	
25.0	15…20xIn	65	65	25	KTU7-D-2D-25-WG	
30.0	15…20xIn	65	65	25	KTU7-D-2D-30-WG	
KTU7-D — High Interrupting Capacity – 3-Pole						
0.5	15…20xIn	100	100	50	KTU7-D-3D-0.5-WG	W6 ❶
1.0	15…20xIn	100	100	50	KTU7-D-3D-1-WG	
2.0	15…20xIn	100	100	50	KTU7-D-3D-2-WG	
3.0	15…20xIn	100	100	50	KTU7-D-3D-3-WG	
4.0	15…20xIn	100	100	50	KTU7-D-3D-4-WG	
5.0	15…20xIn	100	100	50	KTU7-D-3D-5-WG	
6.0	15…20xIn	100	100	50	KTU7-D-3D-6-WG	
8.0	15…20xIn	100	100	50	KTU7-D-3D-8-WG	
10.0	15…20xIn	100	100	50	KTU7-D-3D-10-WG	
12.0	15…20xIn	65	65	25	KTU7-D-3D-12-WG	
15.0	15…20xIn	65	65	25	KTU7-D-3D-15-WG	
20.0	15…20xIn	65	65	25	KTU7-D-3D-20-WG	
25.0	15…20xIn	65	65	25	KTU7-D-3D-25-WG	
30.0	15…20xIn	65	65	25	KTU7-D-3D-30-WG	

Painted Steel, Type 4 / 12 Enclosure

Includes:

- Type 4/12 enclosure – watertight, dusttight
- KTU7 UL489 Molded Case Circuit Breaker
- Black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN Series E) ❷

Modifications (Factory Assembled) ❸

KTU Auxiliaries & Trip Contacts - Front Mount 300V max.	Add Suffix to Cat. Number
1 NO Auxiliary	-A10
1 NC Auxiliary	-A01
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NO SC+OL + 1 NC Auxiliary	-T10A01
1 NO SC+OL + 1 NO Auxiliary	-T10A10

Section Obsolete
See pages F1.56 - F1.88

❶ KTU7 up to 15 Amp is 100% rated in this enclosure. KTU7 20…30 Amp is 80% rated.
❷ A red and yellow handle may be selected instead of the standard black handle. Change "WG" suffix to "WJ". Ex: Change KTU7-D-2D-0.16-**WG** to KTU7-D-2D-0.16-**WJ**.
❸ Load Terminal Cover KT7-PEFC is included with any factory modifications.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ❻❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽❾	Dimension Code
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CX7-9-10-✱-AS0.16A-A10-PG▼	Q4
~	~	~	~	0.16…0.25	3.3	2	CX7-9-10-✱-AS0.25A-A10-PG▼	Q4
~	~	~	~	0.25…0.40	5.2	3	CX7-9-10-✱-AS0.4A-A10-PG▼	Q4
~	~	~	~	0.40…0.63	8.2	4	CX7-9-10-✱-AS0.63A-A10-PG▼	Q4
~	~	1/2	3/4	0.63…1.0	13	5	CX7-9-10-✱-AS1A-A10-PG▼	Q4
~	~	1	1	1.0…1.6	21	6	CX7-9-10-✱-AS1.6A-A10-PG▼	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CX7-9-10-✱-AS2.5A-A10-PG▼	Q4
1	1	3	3	2.5…4	52	8	CX7-9-10-✱-AS4A-A10-PG▼	Q4
1-1/2	2	5	~	4…6.3	82	9	CX7-9-10-✱-AS6.3A-A10-PG▼	Q4
3	3	7-1/2	~	6.3…10	130	11	CX7-12-10-✱-AS10A-A10-PG▼	Q4
5	5	10	~	10…16	208	12	CX7-16-10-✱-AS16A-A10-PG▼	Q4
5	7-1/2	15	~	14.5…20	260	14	CX7-23-10-✱-AS20A-A10-PG▼	Q4
KTA7-25[illegible] Interrupting Capacity								
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CX7-9-10-✱-AH2.5A-A10-PG▼	Q4
1	1	3	3	2.5…4	52	19	CX7-9-10-✱-AH4A-A10-PG▼	Q4
1-1/2	2	5	5	4…6.3	82	21	CX7-9-10-✱-AH6.3A-A10-PG▼	Q4
3	3	7-1/2	10	6.3…10	130	23	CX7-12-10-✱-AH10A-A10-PG▼	Q4
5	5	10	15	10…16	208	28	CX7-16-10-✱-AH16A-A10-PG▼	Q4
5	7-1/2	15	~	14.5…20	260	31	CX7-23-10-✱-AH20A-A10-PG▼	Q4
5	7-1/2	15	~	18…25	325	33	CX7-23-10-✱-AH25A-A10-PG▼	Q4

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code. See page F103 for factory installed modifications

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	24V
120	110V	120V
220W	**200-220V**	**208-240V**
415	400-415V	~
480 ❾	440V	480V
600 ❾	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

Section Obsolete
See pages F1.56 - F1.88

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-✱-AS0.16A-A10-**PG**▼ to CX7-9-10-✱-AS0.16A-A10-**PJ**▼.

❾ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ❹❻❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽	Dimension Code
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	**CX7-9E-10-✱-AS0.16A-A10-PG▼**	Q4
~	~	~	~	0.16…0.25	3.3	2	**CX7-9E-10-✱-AS0.25A-A10-PG▼**	Q4
~	~	~	~	0.25…0.40	5.2	3	**CX7-9E-10-✱-AS0.4A-A10-PG▼**	Q4
~	~	~	~	0.40…0.63	8.2	4	**CX7-9E-10-✱-AS0.63A-A10-PG▼**	Q4
~	~	1/2	3/4	0.63…1.0	13	5	**CX7-9E-10-✱-AS1A-A10-PG▼**	Q4
~	~	1	1	1.0…1.6	21	6	**CX7-9E-10-✱-AS1.6A-A10-PG▼**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	**CX7-9E-10-✱-AS2.5A-A10-PG▼**	Q4
1	1	3	3	2.5…4	52	8	**CX7-9E-10-✱-AS4A-A10-PG▼**	Q4
1-1/2	2	5	~	4…6.3	82	9	**CX7-9E-10-✱-AS6.3A-A10-PG▼**	Q4
3	3	7-1/2	~	6.3…10	130	11	**CX7-9E-10-✱-AS10A-A10-PG▼**	Q4
5	5	10	~	10…16	208	13	**CX7-16E-10-✱-AS16A-A10-PG▼**	Q4
5	7-1/2	15	~	14.5…20	260	15	**CX7-23E-10-✱-AS20A-A10-PG▼**	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	17	**CX7-9E-10-✱-AH2.5A-A10-PG▼**	Q4
1	1	3	3	2.5…4	52	18	**CX7-9E-10-✱-AH4A-A10-PG▼**	Q4
1/1/2	2	5	5	4…6.3	82	22	**CX7-9E-10-✱-AH6.3A-A10-PG▼**	Q4
3	3	7-1/2	10	6.3…10	130	24	**CX7-12E-10-✱-AH10A-A10-PG▼**	Q4
5	5	10	~	10…16	208	28	**CX7-16E-10-✱-AH16A-A10-PG▼**	Q4
5	7-1/2	15	~	14.5…20	260	31	**CX7-23E-10-✱-AH20A-A10-PG▼**	Q4
5	7-1/2	15	~	18…25	325	33	**CX7-23E-10-✱-AH25A-A10-PG▼**	Q4

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactors (for remote operation), with Electronic DC Coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB) + KT7-KN1 ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code.
See page F103 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	24V
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ CX7-9E…23E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CX7-9-10-✱-AS0.16A-A10-**PG**▼ to CX7-9-10-✱-AS0.16A-A10-**PJ**▼.

Enclosed Non-Reversing Combination Controller with E-Stop, AC Operation - Type 1/12K/IP66 ❶❼❽

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)	
Max. Horsepower ❷❸❹				O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❺❼❾❿	Dimension Code
Three Phase								
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CX7-9-10-✱-AS0.16A-A10-PG4U-9	Q4
~	~	~	~	0.16…0.25	3.3	2	CX7-9-10-✱-AS0.25A-A10-PG4U-9	Q4
~	~	~	~	0.25…0.40	5.2	3	CX7-9-10-✱-AS0.4A-A10-PG4U-9	Q4
~	~	~	~	0.40…0.63	8.2	4	CX7-9-10-✱-AS0.63A-A10-PG4U-9	Q4
~	~	1/2	3/4	0.63…1.0	13	5	CX7-9-10-✱-AS1A-A10-PG4U-9	Q4
~	~	1	1	1.0…1.6	21	6	CX7-9-10-✱-AS1.6A-A10-PG4U-9	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CX7-9-10-✱-AS2.5A-A10-PG4U-9	Q4
1	1	3	3	2.5…4	52	8	CX7-9-10-✱-AS4A-A10-PG4U-9	Q4
1-1/2	2	5	~	4…6.3	82	9	CX7-9-10-✱-AS6.3A-A10-PG4U-9	Q4
3	3	7-1/2	~	6.3…10	130	11	CX7-12-10-✱-AS10A-A10-PG4U-9	Q4
5	5	10	~	10…16	208	13	CX7-16-10-✱-AS16A-A10-PG4U-9	Q4
5	7-1/2	15	~	14.5…20	260	15	CX7-23-10-✱-AS20A-A10-PG4U-9	Q4
KTA7-25H High Interrupting Capacity								
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CX7-9-10-✱-AH2.5A-A10-PG4U-9	Q4
1	1	3	3	2.5…4	52	19	CX7-9-10-✱-AH4A-A10-PG4U-9	Q4
1/1/2	2	5	5	4…6.3	82	22	CX7-9-10-✱-AH6.3A-A10-PG4U-9	Q4
3	3	7-1/2	10	6.3…10	130	24	CX7-12-10-✱-AH10A-A10-PG4U-9	Q4
5	5	10	15	10…16	208	28	CX7-16-10-✱-AH16A-A10-PG4U-9	Q4
5	7-1/2	15	~	14.5…20	260	31	CX7-23-10-✱-AH20A-A10-PG4U-9	Q4
5	7-1/2	15	~	18…25	325	33	CX7-23-10-✱-AH25A-A10-PG4U-9	Q4

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R) ❶
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Multifunction 2-position Push Button and Emergency Stop ❼
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❾
- Power wiring

This is a factory assembly.
Optional factory modifications are not available on this device.

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
220W	200-220V	208-240V
415	400-415V	~
480 ❿	440V	480V
600 ❿	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ This is a factory assembly. The KS7-C0C4R does not include knock-outs for field assembly of this starter.

❷ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❸ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❹ CX7 may be applied to single phase loads. Contact factory for these specifications.

❺ Other voltages available, see Section A in this catalog.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❼ Uses D7P-U2EFFEPX11 Two-Position Multifunction push button with legend I/O and D7P-MT44PX01 Emergency Stop Push Button.

❽ CPT not possible with KS7-C0C4R. Refer page F119 for dimensional information.

❾ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: CX7-9-10-✱-AS0.16A-A10-PG4U-9 becomes CX7-9-10-✱-AS0.16A-A10-PJ4U-9.

❿ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, AC Operation - Type 1/12K/IP66 ❻❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R) 	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽❾	Dimension Code
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CXU7-9-22-✱-AS0.16A-A10-PG▼	Q4
~	~	~	~	0.16…0.25	3.3	2	CXU7-9-22-✱-AS0.25A-A10-PG▼	Q4
~	~	~	~	0.25…0.40	5.2	3	CXU7-9-22-✱-AS0.4A-A10-PG▼	Q4
~	~	~	~	0.40…0.63	8.2	4	CXU7-9-22-✱-AS0.63A-A10-PG▼	Q4
~	~	1/2	3/4	0.63…1.0	13	5	CXU7-9-22-✱-AS1A-A10-PG▼	Q4
~	~	1	1	1.0…1.6	21	6	CXU7-9-22-✱-AS1.6A-A10-PG▼	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CXU7-9-22-✱-AS2.5A-A10-PG▼	Q4
1	1	3	3	2.5…4	52	8	CXU7-9-22-✱-AS4A-A10-PG▼	Q4
1-1/2	2	5	~	4…6.3	82	9	CXU7-9-22-✱-AS6.3A-A10-PG▼	Q4
3	3	7-1/2	~	6.3…10	130	11	CXU7-9-22-✱-AS10A-A10-PG▼	Q4
5	5	10	~	10…16	208	13	CXU7-16-22-✱-AS16A-A10-PG▼	Q4
5	7-1/2	15	~	14.5…20	260	15	CXU7-23-22-✱-AS20A-A10-PG▼	Q4
KTA7-25H High Interrupting Capacity								
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CXU7-9-22-✱-AH2.5A-A10-PG▼	Q4
1	1	3	3	2.5…4	52	18	CXU7-9-22-✱-AH4A-A10-PG▼	Q4
1/1/2	2	5	5	4…6.3	82	20	CXU7-9-22-✱-AH6.3A-A10-PG▼	Q4
3	3	7-1/2	10	6.3…10	130	24	CXU7-12-22-✱-AH10A-A10-PG▼	Q4
5	5	10	~	10…16	208	28	CXU7-16-22-✱-AH16A-A10-PG▼	Q4
5	7-1/2	15	~	18…20	260	31	CXU7-23-22-✱-AH20A-A10-PG▼	Q4
5	7-1/2	15	~	18…25	325	33	CXU7-23-22-✱-AH25A-A10-PG▼	Q4

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactor (for remote operation), AC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code. See page F103 for factory installed modifications

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24Z	24V	24V
120	110V	120V
220W	200V-220V	208V-240V
415	400-415V	~
480 ❾	440V	480V
600 ❾	550V	600V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for specifications.

❹ Other voltages available, see Section A in this catalog.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-✱-AS0.16A-A10-**PG**▼ to CXU7-9-10-✱-AS0.16A-A10-**PJ**▼.

❾ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Operation - Type 1/12K/IP66 ❹❻❼

Amp / Horsepower Rating							Non-Metallic Type 1/12K/IP66 Enclosure (KS7-C0C4R)	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❺	Catalog Number ❹❻❽	Dimension Code
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CXU7-9E-22-✱-AS0.16A-A10-PG▼	Q4
~	~	~	~	0.16…0.25	3.3	2	CXU7-9E-22-✱-AS0.25A-A10-PG▼	Q4
~	~	~	~	0.25…0.40	5.2	3	CXU7-9E-22-✱-AS0.4A-A10-PG▼	Q4
~	~	~	~	0.40…0.63	8.2	4	CXU7-9E-22-✱-AS0.63A-A10-PG▼	Q4
~	~	1/2	3/4	0.63…1.0	13	5	CXU7-9E-22-✱-AS1A-A10-PG▼	Q4
~	~	1	1	1.0…1.6	21	6	CXU7-9E-22-✱-AS1.6A-A10-PG▼	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CXU7-9E-22-✱-AS2.5A-A10-PG▼	Q4
1	1	3	3	2.5…4	52	8	CXU7-9E-22-✱-AS4A-A10-PG▼	Q4
1-1/2	2	5	~	4…6.3	82	9	CXU7-9E-22-✱-AS6.3A-A10-PG▼	Q4
3	3	7-1/2	~	6.3…10	130	11	CXU7-9E-22-✱-AS10A-A10-PG▼	Q4
5	5	10	~	10…16	208	13	CXU7-9E-22-✱-AS16A-A10-PG▼	Q4
5	7-1/2	15	~	14.5…20	260	15	CXU7-23E-22-✱-AS20A-A10-PG▼	Q4
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CXU7-9E-22-✱-AH2.5A-A10-PG▼	Q4
1	1	3	3	2.5…4	52	19	CXU7-9E-22-✱-AH4A-A10-PG▼	Q4
1/1/2	2	5	5	4…6.3	82	21	CXU7-9E-22-✱-AH6.3A-A10-PG▼	Q4
3	3	7-1/2	10	6.3…10	130	23	CXU7-12E-22-✱-AH10A-A10-PG▼	Q4
5	5	10	15	10…16	208	28	CXU7-16E-22-✱-AH16A-A10-PG▼	Q4
5	7-1/2	15	~	14.5…20	260	31	CXU7-23E-22-✱-AH20A-A10-PG▼	Q4
5	7-1/2	15	~	18…25	325	33	CXU7-23E-22-✱-AH25A-A10-PG▼	Q4

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Type 1/12K Non-metallic enclosure (KS7-C0C4R)
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1)
- CA7 contactors (for remote operation), with Electronic DC coil
- Gray and black Type 1/12K; IP66 handle (KT7-SHB + KT7-KN1) ❽
- Power wiring
- Factory installed Pilot device option ❻

Replace ▼ with option code. See page F103 for factory installed modifications

Contactor Electronic DC Coil Codes (✱) ❹

DC Coil Codes	Voltage
12E	12V
24E	24V
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

KWIKstarter coils are wired standard from the factory to terminals "L1" and "L2" (for line voltage control). This means the coil voltage must match the line voltage. When a coil is specified for 120V or less, it will be wired for a separate control source (not wired to L1 and L2).

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.*** For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for these specifications.

❹ CXU7-9E…23E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❺ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❻ One Pilot Device option must be selected. Blanks are not available. Plastic Bezel is standard. Pilot Device options include D7-BX_ Base Mounted contact blocks. Pilot Light option must match coil voltage 24V AC or DC, 120V AC or 240V AC only. See Section H for more information.

❼ CPT not possible with KS7-C0C4R. Refer to page F118 for wiring diagram and F119 for dimensional information.

❽ A red and yellow handle may be selected instead of the standard gray and black handle. Change "PG" suffix to "PJ". Ex: Change CXU7-9-10-✱-AS0.16A-A10-**PG**▼ to CXU7-9-10-✱-AS0.16A-A10-**PJ**▼.

CX7 Non-Reversing Controller Modifications

Pilot Device Options - required Select one option only ❶❷❸	Replace ▼ in catalog number with
START-STOP Multi-function	3U
I-O Multi-function	4U
OFF-ON 2-Position Selector switch	6
HAND-OFF-AUTO 3-Position Selector switch	7
Run Pilot Light Green	1G
Run Pilot Light Red	1R
Overload Alarm Pilot Light	1Y
D7-N8 22mm Hole Plug	0
Additional KT7 Auxiliaries & Trip Contacts	
Front Mount 300V maximum	
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NO SC+OL + 1 NC Auxiliary	-T10A01
1 NO SC+OL + 1 NO Auxiliary	-T10A10

CXU7 Reversing Controller Modifications

Pilot Device Options - required Select one option only ❶❷❸	Replace ▼ in catalog number with
FOR-STOP-REV Multi-function	3U
UP-STOP-DOWN Multi-function	4U
OPEN-STOP-CLOSE Multi-function	5U
FOR-STOP-REV 3-Position Selector switch	6
UP-OFF-DOWN 3-Position Selector switch	7
OPEN-OFF-CLOSE 3-Position Selector switch	8
Overload Alarm Pilot Light	1Y
D7-N8 22mm Hole Plug	0
Additional KT7 Auxiliaries & Trip Contacts	
Front Mount 300V maximum	
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NO SC+OL + 1 NC Auxiliary	-T10A01
1 NO SC+OL + 1 NO Auxiliary	-T10A10

CX7 Non-Reversing Controller Additions

Addition	Add to end of catalog number
CA7 Contactor Accessories	
Electronic Interface ❹	-JE
Surge Suppressor RC	-R
Surge Suppressor Varistor	-V
CA7 Auxiliary Contacts ❺❻	
1 NO Auxiliary	-S10
1 NC Auxiliary	-S01
1 NO + 1 NC Auxiliary	-S11
2 NO Auxiliaries	-S20
2 NC Auxiliaries	-S02
Alternate Aux. Contact Arrangement (CXU7 only)	
1 NC in lieu of standard 1 NO	-SX10
2 NC in lieu of standard 2 NO (on CXU7 only)	-SX2
Unwired Terminal Blocks Specify quantity (▼)	-▼TB

CXU7 Reversing Controller Additions

Addition	Add to end of catalog number
CA7 Contactor Accessories	
Electronic Interface	-JE
Surge Suppressor RC	-R
Surge Suppressor Varistor	-V

Section Obsolete
See pages F1.56 - F1.88

❶ KS7-C0C4R only has (1) 22mm hole to accomodate (1) pilot device.
❷ Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X.
See Section H in this catalog for description (all suffix's ending in "U").
❸ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 380 VAC...575VAC require a control circuit transformer.
❹ CRI7E-24 will be used. CRI7E-12 by special order only.
❺ See page A47 for limitations on adding auxiliaries to Electronic DC Coil contactors.
❻ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.

CX7 KWIKstarter Enclosures for use with KTA7 Type E Motor Controllers and CA7 Contactors ❶❸

Component	Description	For Use With		Environmental Approvals	Catalog Number
		Type E Control-ler	Contactor		
	Enclosure for Combo KWIKstarter ❶ CX7/CXU7-9…23 CX7/CXU7-9E…23E	KTA7-25S KTA7-25H	CA7-9...23 CA7-9E…23E CAU7-9…23 CAU7-9E…23E	cUL Type 1/12K IEC IP66	**KS7-C0C4R**

Handle Accessory for CX7/CXU7 KWIKstarters ❶

Accessory	Description	For Use With	Color	Catalog Number
	Door Coupling Handle ❶ • Padlockable • NEMA Type 1/12K and IP66 • Includes handle coupling (shaft) • Requires KT7-KN1 Locking Knob	All KT7s	Gray/Black	**KT7-SHB**
			Red/Yellow	**KT7-SHBY**
	Lockable Twist Knob • for use with KT7-SHB	All KT7s	Gray/Black	**KT7-KN1**
	**Universal Connector for CX7/CXU7** • Provides electrical interconnection of KTA7 and CA7 (with AC or Electronic DC coil) • Applies to FVNR and FVR versions • Allows for mounting the CA7 on a sing[illegible] DIN [illegible]	A[illegible]	Black	**KT7-25S-[illegible]23A** ❹

Section Obsolete
See pages F1.56 - F1.88

CX7 KWIKstarter Pilot Device Kits (for use with KS7-C0C4R Type 1/12K) ❶❷

Kits	Description	Contact Blocks Included		Catalog Number	
		NO	NC		
	Multi-Function Pushbutton kit Non-illuminated **START-STOP** **I-O**	1	1	**KS7-P3U** **KS7-P4U**	
	FOR-STOP-REV **UP-STOP-DOWN** **OPEN-STOP-CLOSE**	2	1	**KS7-P3U-REV** **KS7-P4U-REV** **KS7-P5U-REV**	
	Selector switch kits Non-illuminated, includes legend plate				
	ON-OFF 2-Position	1	0	**KS7-P6**	**See page C29 for**
	HAND-OFF-AUTO 3-Position	2	0	**KS7-P7**	
	FOR-OFF-REV 3-Position **UP-OFF-DOWN** 3-Position **OPEN-OFF-CLOSE** 3-Position	2	0	**KS7-P6-REV** **KS7-P7-REV** **KS7-P8-REV**	
	Run Pilot Light or **Overload Alarm Pilot Light** Plastic operator with diffuser lens in Red, Green or Yellow, with integrated LED power module	Replace ✪ with color choice **R** = Red **G** = Green **Y** = Yellow		**KS7-P1✪24V** ❺ **KS7-P1✪120V** **KS7-P1✪240V**	
	Hole Plug used to plug 22.5mm holes.	Gray Plastic		**D7-N8**	**See page H72**

❶ KS7-C0C4R is supplied with the following holes:
- (1) one 22mm hole for a Pilot Device option, select one kit from this page.
- (1) one 22mm hole for KT7-SHB (or SHRY) Disconnect or Reset handle.

❷ Plastic bezel is standard. Pilot Device Kits include D7-BX_ Base Mounted contact blocks. See Section H for more information.

❸ CPT not possible.

❹ Standard KT7-25S-PEC23 does not work in CX7/CXU7 Kwikstarters.

❺ KS7-P1✪24V can be used with 24VAC or 24VDC.

Enclosed Non-Reversing Combination Controller, AC Operation - Type 4 / 12

Painted Steel, Type 4 / 12 Enclosure



Amp / Horsepower Rating								
Max. Horsepower ❶❷❸				O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❹❼	Dimension Code
Three Phase								
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CX7-9-10-✱-AS0.16A-A10-WG	W6
~	~	~	~	0.16…0.25	3.3	2	CX7-9-10-✱-AS0.25A-A10-WG	W6
~	~	~	~	0.25…0.40	5.2	3	CX7-9-10-✱-AS0.4A-A10-WG	W6
~	~	~	~	0.40…0.63	8.2	4	CX7-9-10-✱-AS0.63A-A10-WG	W6
~	~	1/2	3/4	0.63…1.0	13	5	CX7-9-10-✱-AS1A-A10-WG	W6
~	~	1	1	1.0…1.6	21	6	CX7-9-10-✱-AS1.6A-A10-WG	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CX7-9-10-✱-AS2.5A-A10-WG	W6
1	1	3	3	2.5…4	52	8	CX7-9-10-✱-AS4A-A10-WG	W6
1-1/2	2	5	~	4…6.3	82	9	CX7-9-10-✱-AS6.3A-A10-WG	W6
3	3	7-1/2	~	6.3…10	130	12	CX7-12-10-✱-AS10A-A10-WG	W6
5	5	10	~	10…16	208	16	CX7-16-10-✱-AS16A-A10-WG	W6
5	7-1/2	15	~	14.5…20	260	15	CX7-23-10-✱-AS20A-A10-WG	W6
KTA7-25H High Interrupting Capacity								
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CX7-9-10-✱-AH2.5A-A10-WG	W6
1	1	3	3	2.5…4	52	18	CX7-9-10-✱-AH4A-A10-WG	W6
1/1/2	2	5	5	4…6.3	82	22	CX7-9-10-✱-AH6.3A-A10-WG	W6
3	3	7-1/2	10	6.3…10	130	24	CX7-12-10-✱-AH10A-A10-WG	W6
5	5	10	15	10…16	208	28	CX7-16-10-✱-AH16A-A10-WG	W6
5	7-1/2	15	~	14.5…20	260	31	CX7-23-10-✱-AH20A-A10-WG	W6
5	7-1/2	15	~	18…25	325	33	CX7-23-10-✱-AH25A-A10-WG	W6
KTA7-45H High Interrupting Capacity								
3	3	7-1/2	10	6.3…10	130	36	CX7-30-10-✱-AH10A-A10-WG	W7
5	5	10	15	10…16	208	37	CX7-30-10-✱-AH16A-A10-WG	W7
5	7-1/2	15	20	14.5…20	260	38	CX7-30-10-✱-AH20A-A10-WG	W7
7-1/2	10	20	20	18…25	325	39	CX7-30-10-✱-AH25A-A10-WG	W7
7-1/2	10	20	25	23...32	416	41	CX7-30-10-✱-AH32A-A10-WG	W7
10	10	25	~	32…45	585	45	CX7-37-10-✱-AH45A-A10-WG	W7
10	15	30	~	32…45	585	46	CX7-43-10-✱-AH45A-A10-WG	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KTA7 "Type E/F" Self-protected Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Pilot device shown is factory installed option

See page F109 for factory installed modifications

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
220W	200-220V	208-240V
277	240V	277V
415 ❼	400-415V	~
480 ❼	440V	480V
600 ❼	550V	600V

Section Obsolete
See pages F1.56 - F1.88

❶ **Horsepower ratings shown in the table above are for reference. The final selection of the controller depends on the actual motor full load current and service factor.**
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CX7**-9-10-✱-0.16A-A10-WG to **CBX7**-9-10-✱-0.16A-A10-WJ.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9-10-✱-0.16A-A10-**WG** to CX7-9-10-✱-0.16A-A10-**WJ**.

❺ Other voltages available, see Section A in this catalog.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❼ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Non-Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

Amp / Horsepower Rating							Painted Steel, Type 4 / 12 Enclosure 	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❼	Catalog Number ❹	Dimension Code
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CX7-9E-10-✱-AS0.16A-A10-WG	W6
~	~	~	~	0.16…0.25	3.3	2	CX7-9E-10-✱-AS0.25A-A10-WG	W6
~	~	~	~	0.25…0.40	5.2	3	CX7-9E-10-✱-AS0.4A-A10-WG	W6
~	~	~	~	0.40…0.63	8.2	4	CX7-9E-10-✱-AS0.63A-A10-WG	W6
~	~	1/2	3/4	0.63…1.0	13	5	CX7-9E-10-✱-AS1A-A10-WG	W6
~	~	1	1	1.0…1.6	21	6	CX7-9E-10-✱-AS1.6A-A10-WG	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CX7-9E-10-✱-AS2.5A-A10-WG	W6
1	1	3	3	2.5…4	52	8	CX7-9E-10-✱-AS4A-A10-WG	W6
1-1/2	2	5	~	4…6.3	82	9	CX7-9E-10-✱-AS6	W6
3	3	7-1/2	~	6.3…10	130	11	CX7-12E-10-✱-AS	W6
5	5	10	~	10…16	208	12	CX7-16E-	W6
5	7-1/2	15	~	14.5…20	260	15	CX7-	W6
KTA7-25H High Interrupting Capacity								
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CX7-9E-10-✱-AH2.5A-	W6
1	1	3	3	2.5…4	52	19	CX7-9E-10-✱-AH4A-	W6
1/1/2	2	5	5	4…6.3	82	22	CX7-9E-10-✱-	W6
3	3	7-1/2	10	6.3…10	130	24	CX7-	W6
5	5	10	15	10…16	208	28	CX7-	W6
5	7-1/2	15	~	14.5…20	260	31	CX7-23E-10-✱-AH20A-A10-WG	W6
5	7-1/2	15	~	18…25			CX7-23E-10-✱-AH25A-A10-WG	W6
KTA7-45H High Interrupting Capacity								
3	3	7-1/2	10	6.3…10	130	36	CX7-30E-10-✱-AH10A-A10-WG	W7
5	5	10	15	10…16	208	37	CX7-30E-10-✱-AH16A-A10-WG	W7
5	7-1/2	15	20	14.5…20	260	38	CX7-30E-10-✱-AH20A-A10-WG	W7
7-1/2	10	20	20	18…25	325	39	CX7-30E-10-✱-AH25A-A10-WG	W7
7-1/2	10	20	25	23…32	416	41	CX7-37E-10-✱-AH32A-A10-WG	W7
10	10	25	~	32…45	585	45	CX7-37E-10-✱-AH45A-A10-WG	W7
10	15	30	~	32…45	585	46	CX7-43E-10-✱-AH45A-A10-WG	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactor (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Pilot device shown is factory installed option

See page F109 for factory installed modifications

Section Obsolete
See pages F1.56 - F1.88

Contactor Electronic DC Coil Codes (✱) ❺

DC Coil Codes	Voltage
12E	12V
24E	24V
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See Coil Code tables on this page for codes**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. Contact factory for these specifications.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CX7-9E-10-✱-0.16A-A10-**WG** to CX7-9E-10-✱-0.16A-A10-**WJ**.

❺ CX7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❼ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Enclosed Reversing Combination Controller, AC Operation - Type 4 / 12

Amp / Horsepower Rating							Painted Steel, Type 4 / 12 Enclosure 	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❹❼	Dimension Code
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CXU7-9-22-✱-AS0.16A-A10-WG	W6
~	~	~	~	0.16…0.25	3.3	2	CXU7-9-22-✱-AS0.25A-A10-WG	W6
~	~	~	~	0.25…0.40	5.2	3	CXU7-9-22-✱-AS0.4A-A10-WG	W6
~	~	~	~	0.40…0.63	8.2	4	CXU7-9-22-✱-AS0.63A-A10-WG	W6
~	~	1/2	3/4	0.63…1.0	13	5	CXU7-9-22-✱-AS1A-A10-WG	W6
~	~	1	1	1.0…1.6	21	6	CXU7-9-22-✱-AS1.6A-A10-WG	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CXU7-9-22-✱-AS2.5A-A10-WG	W6
1	1	3	3	2.5…4	52	8	CXU7-9-22-✱-AS4A-A10-WG	W6
1-1/2	2	5	~	4…6.3	82	9	CXU7-9-22-✱-AS6.3A-A10-WG	W6
3	3	7-1/2	~	6.3…10	130	10	CXU7-12-22-✱-AS10A-A10-WG	W6
5	5	10	~	10…16	208	11	CXU7-16-22-✱-AS16A-A10-WG	W6
5	7-1/2	15	~	14.5…20	260	15	CXU7-23-22-✱-AS20A-A10-WG	W6
KTA7-25H High Interrupting Capacity								
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CXU7-9-22-✱-AH2.5A-A10-WG	W6
1	1	3	3	2.5…4	52	18	CXU7-9-22-✱-AH4A-A10-WG	W6
1/1/2	2	5	5	4…6.3	82	19	CXU7-9-22-✱-AH6.3A-A10-WG	W6
3	3	7-1/2	10	6.3…10	130	24	CXU7-12-22-✱-AH10A-A10-WG	W6
5	5	10	~	10…16	208	28	CXU7-16-22-✱-AH16A-A10-WG	W6
5	7-1/2	15	~	14.5…20	260	31	CXU7-23-22-✱-AH20A-A10-WG	W6
5	7-1/2	15	~	18…25	325	33	CXU7-23-22-✱-AH25A-A10-WG	W6
KTA7-45H High Interrupting Capacity								
3	3	7-1/2	10	6.3…10	130	36	CXU7-30-22-✱-AH10A-A10-WG	W7
5	5	10	15	10…16	208	37	CXU7-30-22-✱-AH16A-A10-WG	W7
5	7-1/2	15	20	14.5…20	260	38	CXU7-30-22-✱-AH20A-A10-WG	W7
7-1/2	10	20	20	18…25	325	39	CXU7-30-22-✱-AH25A-A10-WG	W7
7-1/2	10	20	25	23…32	416	41	CXU7-37-22-✱-AH32A-A10-WG	W7
10	10	25	~	32…45	585	45	CXU7-37-22-✱-AH45A-A10-WG	W7
10	15	30	~	32…45	585	46	CXU7-43-22-✱-AH45A-A10-WG	W7

Section Obsolete
See pages F1.56 - F1.88

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE1 or KT7-45-TE)
- CA7 contactors (for remote operation), AC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F109 for factory installed modifications

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24Z	24V	24V
120	110V	120V
220W	200-220V	208-240V
277	240V	277V
415 ❼	400-415V	~
480 ❼	440V	480V
600 ❼	550V	600V

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for these applications.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9-10-✱-0.16A-A10-**WG** to CXU7-9-10-✱-0.16A-A10-**WJ**.

❺ Other voltages available, see Section A in this catalog.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

❼ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Enclosed Reversing Combination Controller, Electronic DC Coil - Type 4 / 12

Amp / Horsepower Rating							Painted Steel, Type 4 / 12 Enclosure 	
Max. Horsepower ❶❷❸ Three Phase				O/L Relay Ampere Range	Magnetic Response Current	Index ❻	Catalog Number ❹	Dimension Code
200V	230V	460V	575V					
KTA7-25S Standard Interrupting Capacity								
~	~	~	~	0.10…0.16	2.1	1	CXU7-9E-22-✱-AS0.16A-A10-WG	W6
~	~	~	~	0.16…0.25	3.3	2	CXU7-9E-22-✱-AS0.25A-A10-WG	W6
~	~	~	~	0.25…0.40	5.2	3	CXU7-9E-22-✱-AS0.4A-A10-WG	W6
~	~	~	~	0.40…0.63	8.2	4	CXU7-9E-22-✱-AS0.63A-A10-WG	W6
~	~	1/2	3/4	0.63…1.0	13	5	CXU7-9E-22-✱-AS1A-A10-WG	W6
~	~	1	1	1.0…1.6	21	6	CXU7-9E-22-✱-AS1.6A-A10-WG	W6
1/2	3/4	1-1/2	2	1.6…2.5	33	7	CXU7-9E-22-✱-AS2.5A-A10-WG	W6
1	1	3	3	2.5…4	52	8	CXU7-9E-22-✱-AS4A-A10-WG	W6
1-1/2	2	5	~	4…6.3	82	9	CXU7-9E-22-✱-AS6.3A-A10-WG	W6
3	3	7-1/2	~	6.3…10	130	11	CXU7-12E-22-✱-AS10A-A10-WG	W6
5	5	10	~	10…16	208	12	CXU7-16E-22-✱-AS16A-A10-WG	W6
5	7-1/2	15	~	14.5…20	260	15	CXU7-23E-22-✱-AS20A-A10-WG	W6
KTA7-25H High Interrupting Capacity								
1/2	3/4	1-1/2	2	1.6…2.5	33	17	CXU7-9E-22-✱-AH2.5A-A10-WG	W6
1	1	3	3	2.5…4	52	19	CXU7-9E-22-✱-AH4A-A10-WG	W6
1/1/2	2	5	5	4…6.3	82	22	CXU7-9E-22-✱-AH6.3A-A10-WG	W6
3	3	7-1/2	10	6.3…10	130	24	CXU7-12E-22-✱-AH10A-A10-WG	W6
5	5	10	15	10…16	208	28	CXU7-16E-22-✱-AH16A-A10-WG	W6
5	7-1/2	15	~	14.5…20	260	31	CXU7-23E-22-✱-AH20A-A10-WG	W6
5	7-1/2	15	~	18…25	325	33	CXU7-23E-22-✱-AH25A-A10-WG	W6
KTA7-45H High Interrupting Capacity								
3	3	7-1/2	10	6.3…10	130	36	CXU7-30E-22-✱-AH10A-A10-WG	W7
5	5	10	15	10…16	208	37	CXU7-30E-22-✱-AH16A-A10-WG	W7
5	7-1/2	15	20	14.5…20	260	38	CXU7-30E-22-✱-AH20A-A10-WG	W7
7-1/2	10	20	20	18…25	325	39	CXU7-30E-22-✱-AH25A-A10-WG	W7
7-1/2	10	20	25	23…32	416	41	CXU7-37E-22-✱-AH32A-A10-WG	W7
10	10	25	~	32…45	585	45	CXU7-37E-22-✱-AH45A-A10-WG	W7
10	15	30	~	32…45	585	46	CXU7-43E-22-✱-AH45A-A10-WG	W7

Includes:

- Type 4 / 12 enclosure - watertight, dustight
- KT7 "Type E/F" Combination Motor Controller with 1 NO front mount Auxiliary Contact (Cat #: KT7-PE1-10)
- Terminal Adaptor for Type E Applications (Cat.# KT7-25-TE or KT7-45-TE)
- CA7 contactors (for remote operation), Electronic DC coil
- Power wiring
- Gray and black Type 4/4X/12; IP66 handle (Cat.# KT7-HTN) ❹
- Control power transformer, pilot device, terminals and other equipment shown are factory installed options

See page F109 for factory installed modifications

Section Obsolete
See pages F1.56 - F1.88

Contactor Electronic DC Coil Codes (✱) ❺

DC Coil Codes	Voltage
12E	12V
24E	24V
36E	36-48V
48E	48-72V
110E	110-125V
220E	220-250V

Ordering Instructions

Specify Catalog Number	
Replace (▯) with Coil Code Select modifications if required	**See Coil Code tables on this page for codes**

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXU7 may be applied to single phase loads. Contact factory for these applications.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "WG" suffix to "WJ". Ex: Change CXU7-9E-10-✱-0.16A-A10-**WG** to CXU7-9E-10-✱-0.16A-A10-**WJ**.

❺ CXU7-9E…43E with electronic coils are not interchangeable with non-electronic DC or AC coils.

❻ KAIC Assembly Rating Index. See pages F73-F76 for Application Rating Guide.

Non-Reversing and Reversing CX7 Combination Controller Modifications (Factory Assembled)

Description	Add Suffix to Catalog Number
Pilot Devices ❶	
START-STOP multi-function pushbutton	3U
ON-OFF multi-function pushbutton	4U
FOR-STOP-REV multi-function pushbutton	3U
UP-STOP-DOWN multi-function pushbutton	4U
OPEN-STOP-CLOSE multi-function pushbutton	5U
HAND-AUTO selector switch	5
OFF-ON selector switch	6
HAND-OFF-AUTO selector switch	7
FOR-OFF-REV selector switch	6
UP-OFF-DOWN selector switch	7
OPEN-OFF-CLOSE selector switch	8
Pilot light only ❸	1
Pilot lights only (2) ❸	2
Pilot light w/ START-STOP multi-function pushbutton ❸	13U
Pilot light w/ ON-OFF multi-function pushbutton ❸	14U
Pilot light w/ HAND-AUTO selector switch ❸	15
Pilot light w/ OFF-ON selector switch ❸	16
Pilot light w/ HAND-OFF-AUTO selector switch ❸	17
Control Power Transformer	
(with fused primary and secondary) *Primary volts* / *Secondary volts*	Replace (✱) in catalog # with the following codes ❷
208 / 120	XA
240 / 240	XB
480 / 120	XC
50 watt Standard Capacity — 575 / 120	XD
380 / 110	XE
240 / 24	XF
480 / 24	XJ
600 / 24	
KT7 Auxiliaries & Trip Contacts	**Change "-A10-" to ...**
Front mount 300V maximum	
1 NO + 1 NC Auxiliary	-A11
2 NO Auxiliaries	-A20
1 NO SC+OL + 1 NC Auxiliary	-T10A01
1 NO SC+OL + 1 NO Auxiliary	-T10A10
Side Mount 600V maximum	
2 NC Auxiliaries	-AS02
2 NO Auxiliaries	-AS20
1 NO + 1 NC Auxiliary	-AS11
1 NC SC+OL + 1 NO Auxiliary	-R10
1 NC SC+OL + 1 NC Auxiliary	-R11

Description	Add Suffix to Catalog Number
Additional KT7 Trip Contacts - Side Mount (600V max)	
1 NO SC+OL + 1 NO SC	-R00
1 NO SC+OL + 1 NC SC	-R01
1 NC SC+OL + 1 NO SC	-R10
KT7 Accessories	
Undervoltage Release Module (Select coil voltage from table below)	-UA-✱
Shunt Release Module	-AA-✱
CA7 Auxiliary Contacts ❺	
1 NO Auxiliary	-S10
1 NC Auxiliary	-S01
1 NO + 1 NC Auxiliary	-S11
2 NO Auxiliaries	-S20
2 NC Auxiliaries	-S02
1 NO + 2 NC Auxiliary	-S12
2 NO + 1 NC Auxiliary	-S21
3 NO Auxiliaries	-S30
3 NC Auxiliaries	-S03
1 NO + 3 NC Auxiliary	-S13
3 NO + 1 NC Auxiliary	-S31
2 NO + 2 NC Auxiliary	-S22
4 NO Auxiliaries	-S40
4 NC Auxiliaries	-S04
Alternate Aux. Contact Arrangement (CX7 only)	
1 NC in lieu of standard 1 NO	-SX10
2 NC in lieu of standard 2 NO (on CXU7 only)	-SX2
CA7 Contactor Accessories	
Electronic Interface	-JE ❹
Surge Suppressor RC	-R
Surge Suppressor Varistor	-V
Unwired Terminal Blocks Specify quantity (▼)	-▼TB

Section Obsolete
See pages F1.56 - F1.88

-UA..-AA Coil Codes (✱)

AC Coil Code	Voltage Range 50 Hz	Voltage Range 60 Hz
24V	21V	24V
28V	24V	28V
120V	105V	120V
127V	110V	127V
230V	220...230V	~
240V	~	240...260V
277V	240V	277V
460V	380...400V	400...460V
480V	415V	480V
600V	550V	600V

❶ Currently supply D7 multi-function pushbuttons as standard which do not require protective boots to meet Type 4X. See Section H in this catalog for description (all suffix's ending in "U").
❷ Factory modifications often change the enclosure size. Refer to factory for dimensions when critical to the installation.
❸ Pilot Lights may be applied with 24VAC/VDC, 120VAC or 240VAC Control Circuit. Pilot Lights with 277 VAC...575VAC require a control circuit transformer.
❹ CRI7E-24 will be used. CRI7E-12 by special order only.
❺ Additional auxiliaries are per contactor. Number of auxiliaries is double for reversing applications.

CX7 Explosion Proof Combination Controllers - NEMA Type 4/4X/7/9 with Type 4 Gaskets

Amp / Horsepower Rating	Max. Horsepower ❶❷❸ Three Phase 200V	230V	460V	575V	O/L Relay Ampere Range	Magnetic Response Current	Catalog Number ❺	Dimension Code
KTA7-25S Standard Interrupting Capacity								
	~	~	~	~	0.10…0.16	2.1	CX7-9-10-✱-AS0.16A-A10-EZ	EZ
	~	~	~	~	0.16…0.25	3.3	CX7-9-10-✱-AS0.25A-A10-EZ	EZ
	~	~	~	~	0.25…0.40	5.2	CX7-9-10-✱-AS0.4A-A10-EZ	EZ
	~	~	~	~	0.40…0.63	8.2	CX7-9-10-✱-AS0.63A-A10-EZ	EZ
	~	~	1/2	3/4	0.63…1.0	13	CX7-9-10-✱-AS1A-A10-EZ	EZ
	~	~	1	1	1.0…1.6	21	CX7-9-10-✱-AS1.6A-A10-EZ	EZ
	1/2	3/4	1-1/2	2	1.6…2.5	33	CX7-9-10-✱-AS2.5A-A10-EZ	EZ
	1	1	3	3	2.5…4	52	CX7-9-10-✱-AS4A-A10-EZ	EZ
	1-1/2	2	5	~	4…6.3	82	CX7-9-10-✱-AS6.3A-A10-EZ	EZ
	3	3	7-1/2	~	6.3…10	130	CX7-12-10-✱-AS10A-A10-EZ	EZ
	5	5	10	~	10…16	208	CX7-16-10-✱-AS16A-A10-EZ	EZ
	5	7-1/2	15	~	14.5…20	260	CX7-23-10-✱-AS20A-A10-EZ	EZ
KTA7-25H High Interrupting Capacity								
	1/2	3/4	1-1/2	2	1.6…2.5	33	CX7-9-10-✱-AH2.5A-A10-EZ	EZ
	1	1	3	3	2.5…4	52	CX7-9-10-✱-AH4A-A10-EZ	EZ
	1/1/2	2	5	5	4…6.3	82	CX7-9-10-✱-AH6.3A-A10-EZ	EZ
	3	3	7-1/2	10	6.3…10	130	CX7-12-10-✱-AH10A-A10-EZ	EZ
	5	5	10	15	10…16	208	CX7-16-10-✱-AH16A-A10-EZ	EZ
	5	7-1/2	15	~	14.5…20	260	CX7-23-10-✱-AH20A-A10-EZ	EZ
	5	7-1/2	15	~	18…25		CX7-23-10-✱-AH25A-A10-EZ	EZ
KTA7-45H High Interrupting Capacity								
	3	3	7-1/2	10	6.3…10	130	CX7-30-10-✱-AH10A-A10-EZ	EZ
	5	5	10	15	10…16	208	CX7-30-10-✱-AH16A-A10-EZ	EZ
	5	7-1/2	15	20	14.5…20	260	CX7-30-10-✱-AH20A-A10-EZ	EZ
	7-1/2	10	20	20	18…25	325	CX7-30-10-✱-AH25A-A10-EZ	EZ
	7-1/2	10	20	25	23…32	416	CX7-30-10-✱-AH32A-A10-EZ	EZ
	10	10	25	~	32…45	585	CX7-37-10-✱-AH45A-A10-EZ	EZ
	10	15	30	~	32…45	585	CX7-43-10-✱-AH45A-A10-EZ	EZ

Includes:

- Class I, Div I, Group B, C & D – Class II, Div I, Group E, F & G enclosure Class III, Zone I, IIB & H2
- KT7 "Type E" Self-protected Combination Manual Motor Controller with 1 NO front mount auxiliary contact (Cat.# KT7-PE1-10)
- Terminal Adaptor for Combo Type E/F Applications (Cat.# KT7-25-TE or KT7-45-TE)
- CA7 contactor (for remote operation), AC coil
- Power wiring

Modifications (Factory Assembled)

KT7 Auxiliaries & Trip Contacts,	Change "A10" in Cat. # to...
Front Mount 300V max.	
1 NC Auxiliary	**-A01**
1 NO + 1 NC Auxiliary	**-A11**
2 NO Auxiliaries	**-A20**
1 NO SC+OL + 1 NC Auxiliary	**-T10A01**
1 NO SC+OL + 1 NO Auxiliary	**-T10A10**
Side Mount 600V max.	
2 NO Auxiliaries	**-AS20**
1 NO + 1 NC Auxiliary	**-AS11**
1 NO SC+OL + 1 NO Auxiliary	**-R10**
1 NC SC+OL + 1 NC Auxiliary	**-R11**

CA7 Contactor Accessories	Add Suffix to Cat. Number
1 NC Auxiliary	**-S01**
1 NO Auxiliary	**-S10**
Electronic Interface	**-JE**
Surge Suppressor RC	**-R**
Surge Suppressor Varistor	**-V**
Enclosure Modifications	
Dual START/STOP pushbutton	**3**
ON/OFF selector switch	**6**
H-O-A	**7**
Breather/Drain	**-BD**

Contactor AC Coil Codes (✱) ❹

AC Coil Code	Voltage Range 50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
277	240V	277V
415 ❺	400-415V	~
480 ❺	**440V**	**480V**
600 ❺	550V	600V

Section Obsolete
See pages F1.56 - F1.88

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***

- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CX7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CX7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CX7**-9-10-✱-0.16A-A10-EZ to **CBX7**-9-10-✱-0.16A-A10-EZ.

❹ Other voltages available, see Section A in this catalog.

❺ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Select modifications if required	**See tables on this page for codes**

Type E/F Simplex & Duplex Pump Controllers

CXP7-9...

Simplex Pump Controllers

A single KTA7 motor controller plus matching CA7 contactor can be combined in an enclosure as a Simplex Combination Controller for pumping applications. Additional space is provided for the customer to field addition of time clocks or float switches as required by the application. An environmentally approved thru-the-door handle provides for a required disconnect. These pump panels can be supplied with Suitable for Service Entrance (SUSE) label on demand. Type E/F pump panels are less expensive than the classic Construction Type A (Fusible) or Construction Type C (MCCB) versions shown in Section C of this catalog.

Type E/F Simplex Pump Controller Panels include:

- Contactor (with AC coil)
- Type E/F self-protected motor controller
- "START" Momentary Push Button
- "HOA" Selector Switch
- A minimum of 6" x 10" extra back pan space
- UL Type rated enclosure

Section Obsolete
See pages F1.56 - F1.88

Duplex Pump Controllers

Two starter duplex panels can be fed from one power source or two power sources and include lead/lag control circuitry to meet customers' need in pumping and many other applications. Two environmentally approved thru-the-door handle disconnect mechanisms means no main feeder device is required and smaller, less expensive panel than a classic duplex panel as offered in Section C of this catalog. The following pages include a selection of duplex controllers and you can contact your Sprecher + Schuh representative to modify the selection.

Type E/F Duplex Pump Controller Panels include:

- (2) Contactors (AC coil) and (2) Type E/F self protected motor controllers
- (1) Electronic alternating relay
- (1) UL type rated enclosure
- Designed per alternation control diagram shown at bottom of page F117

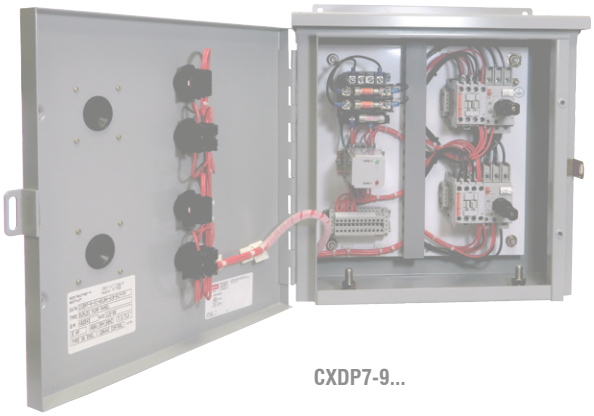

CXDP7-9...

Series CXP7 & Type E/F Combo Pump Panel

Max. Horsepower ❶❷❸ Three Phase				Current Adjustment Range (A)	Magnetic Response Current	Type 3R Rainproof (Metal) Catalog Number ❹❻	Dimension Code	Type 4X Watertight Corrosion Resistant Non-metallic Catalog Number ❹❻	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	CXP7-9-10-✱-AS0.16A-A10-RG	Q	CXP7-9-10-✱-AS0.16A-A10-CG	R/F
~	~	~	~	0.16…0.25	3.3	CXP7-9-10-✱-AS0.25A-A10-RG	Q	CXP7-9-10-✱-AS0.25A-A10-CG	R/F
~	~	~	~	0.25…0.40	5.2	CXP7-9-10-✱-AS0.4A-A10-RG	Q	CXP7-9-10-✱-AS0.4A-A10-CG	R/F
~	~	~	~	0.40…0.63	8.2	CXP7-9-10-✱-AS0.63A-A10-RG	Q	CXP7-9-10-✱-AS0.63A-A10-CG	R/F
~	~	1/2	3/4	0.63…1.0	13	CXP7-9-10-✱-AS1A-A10-RG	Q	CXP7-9-10-✱-AS1A-A10-CG	R/F
~	~	1	1	1.0…1.6	21	CXP7-9-10-✱-AS1.6A-A10-RG	Q	CXP7-9-10-✱-AS1.6A-A10-CG	R/F
1/2	3/4	1-1/2	2	1.6…2.5	33	CXP7-9-10-✱-AS2.5A-A10-RG	Q	CXP7-9-10-✱-AS2.5A-A10-CG	R/F
1	1	3	3	2.5…4	52	CXP7-9-10-✱-AS4A-A10-RG	Q	CXP7-9-10-✱-AS4A-A10-CG	R/F
1-1/2	2	5	~	4…6.3	82	CXP7-9-10-✱-AS6.3A-A10-RG	Q	CXP7-9-10-✱-AS6.3A-A10-CG	R/F
3	3	7-1/2	~	6.3…10	130	CXP7-12-10-✱-AS10A-A10-RG	Q	CXP7-12-10-✱-AS10A-A10-CG	R/F
5	5	10	~	10…16	208	CXP7-16-10-✱-AS16A-A10-RG	Q	CXP7-16-10-✱-AS16A-A10-CG	R/F
5	7-1/2	15	~	14.5…20	260	CXP7-23-10-✱-AS20A-A10-RG	Q	CXP7-23-10-✱-AS20A-A10-CG	R/F
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	CXP7-9-10-✱-AH2.5A-A10-RG	Q	CXP7-9-10-✱-AH2.5A-A10-CG	R/F
1	1	3	3	2.5…4	52	CXP7-9-10-✱-AH4A-A10-RG	Q	CXP7-9-10-✱-AH4A-A10-CG	R/F
1/1/2	2	5	5	4…6.3	82	CXP7-9-10-✱-AH6.3A-A10-RG	Q	CXP7-9-10-✱-AH6.3A-A10-CG	R/F
3	3	7-1/2	10	6.3…10	130	CXP7-12-10-✱-AH10A-A10-RG	Q	CXP7-12-10-✱-AH10A-A10-CG	R/F
5	5	10	15	10…16	208	CXP7-16-10-✱-AH16A-A10-RG	Q	CXP7-16-10-✱-AH16A-A10-CG	R/F
5	7-1/2	15	~	14.5…20	260	CXP7-23-10-✱-AH20A-A10-RG	Q	CXP7-23-10-✱-AH20A-A10-CG	R/F
5	7-1/2	15	~	18…25	325	CXP7-23-10-✱-AH25A-A10-RG	Q	CXP7-23-10-✱-AH25A-A10-CG	R/F
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	CXP7-30-10-✱-AH10A-A10-RG	Q	CXP7-30-10-✱-AH10A-A10-CG	R/F
5	5	10	15	10…16	208	CXP7-30-10-✱-AH16A-A10-RG	Q	CXP7-30-10-✱-AH16A-A10-CG	R/F
5	7-1/2	15	20	14.5…20	260	CXP7-30-10-✱-AH20A-A10-RG	Q	CXP7-30-10-✱-AH20A-A10-CG	R/F
7-1/2	10	20	20	18…25	325	CXP7-30-10-✱-AH25A-A10-RG	Q	CXP7-30-10-✱-AH25A-A10-CG	R/F
7-1/2	10	20	25	23…32	416	CXP7-30-10-✱-AH32A-A10-RG	Q	CXP7-30-10-✱-AH32A-A10-CG	R/F
10	10	25	~	32…45	585	CXP7-37-10-✱-AH45A-A10-RG	Q	CXP7-37-10-✱-AH45A-A10-CG	R/F
10	15	30	~	32…45	585	CXP7-43-10-✱-AH45A-A10-RG	Q	CXP7-43-10-✱-AH45A-A10-CG	R/F

Section Obsolete
See pages F1.56 - F1.88

NOTE: Catalog Numbers, list Price and dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.

Contactor AC Coil Codes (✱) ❺

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
220W	200-220V	208-240V
277	240V	277V
415 ❻	400-415V	~
480 ❻	440V	480V
600 ❻	550V	600V

Ordering Instructions

Specify Catalog Number	
Replace (✱) with Coil Code Factory Modifications available	See this page Contact factory

❶ **Horsepower ratings shown in the table above are for reference.** ***The final selection of the controller depends on the actual motor full load current and service factor.***
- For motor with service factor less than 1.15. Use motor nameplate full load current times 0.9 and choose the motor starter with the appropriate current range. Example: Motor FLC = 4.2A; S.F. = 1.0. 4.2A x 0.9 = 3.78A. Select catalog number KTA7-25S-4A.

❷ Magnetic trip is fixed at 13x the maximum value of the current adjustment range.

❸ CXP7 may be applied to single phase loads. See footnote 1 for device selection criteria. To order single phase unit, change "CXP7" in catalog number to "CBX7". Three pole series connection will be provided. Ex: Change **CXP7**-9-10-✱-0.16A-A10-RG to **CBXP7**-9-10-✱-0.16A-A10-RG.

❹ A red and yellow handle may be selected instead of the standard gray and black handle. Change "RG" suffix to "RJ". Ex: Change CXP7-9-10-✱-0.16A-A10-**RG** to CXP7-9-10-✱-0.16A-A10-**RJ**.

❺ Other voltages available, see Section A in this catalog.

❻ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Series CXDP7 with Type E/F Combination Controller

Max. Horsepower Three Phase				Current Adjustment Range (A)	Magnetic Response Current	Type 3R Rainproof (Metal) Catalog Number ❷	Dimension Code	Type 4X Watertight Corrosion Resistant Non-metallic Catalog Number ❷	Dimension Code
200V	230V	460V	575V						
KTA7-25S Standard Interrupting Capacity									
~	~	~	~	0.10…0.16	2.1	CXDP7-9-10-∗-AS0.16A-A10-RG	R/F	CXDP7-9-10-∗-AS0.16A-A10-CG	R/F
~	~	~	~	0.16…0.25	3.3	CXDP7-9-10-∗-AS0.25A-A10-RG	R/F	CXDP7-9-10-∗-AS0.25A-A10-CG	R/F
~	~	~	~	0.25…0.40	5.2	CXDP7-9-10-∗-AS0.4A-A10-RG	R/F	CXDP7-9-10-∗-AS0.4A-A10-CG	R/F
~	~	~	~	0.40…0.63	8.2	CXDP7-9-10-∗-AS0.63A-A10-RG	R/F	CXDP7-9-10-∗-AS0.63A-A10-CG	R/F
~	~	1/2	3/4	0.63…1.0	13	CXDP7-9-10-∗-AS1A-A10-RG	R/F	CXDP7-9-10-∗-AS1A-A10-CG	R/F
~	~	1	1	1.0…1.6	21	CXDP7-9-10-∗-AS1.6A-A10-RG	R/F	CXDP7-9-10-∗-AS1.6A-A10-CG	R/F
1/2	3/4	1-1/2	2	1.6…2.5	33	CXDP7-9-10-∗-AS2.5A-A10-RG	R/F	CXDP7-9-10-∗-AS2.5A-A10-CG	R/F
1	1	3	3	2.5…4	52	CXDP7-9-10-∗-AS4A-A10-RG	R/F	CXDP7-9-10-∗-AS4A-A10-CG	R/F
1-1/2	2	5	~	4…6.3	82	CXDP7-9-10-∗-AS6.3A-A10-RG	R/F	CXDP7-9-10-∗-AS6.3A-A10-CG	R/F
3	3	7-1/2	~	6.3…10	130	CXDP7-12-10-∗-AS10A-A10-RG	R/F	CXDP7-12-10-∗-AS10A-A10-CG	R/F
5	5	10	~	10…16	208	CXDP7-16-10-∗-AS16A-A10-RG	R/F	CXDP7-16-10-∗-AS16A-A10-CG	R/F
5	7-1/2	15	~	14.5…20	260	CXDP7-23-10-∗-AS20A-A10-RG	R/F	CXDP7-23-10-∗-AS20A-A10-CG	R/F
KTA7-25H High Interrupting Capacity									
1/2	3/4	1-1/2	2	1.6…2.5	33	CXDP7-9-10-∗-AH2.5A-A10-RG	R/F	CXDP7-9-10-∗-AH2.5A-A10-CG	R/F
1	1	3	3	2.5…4	52	CXDP7-9-10-∗-AH4A-A10-RG	R/F	CXDP7-9-10-∗-AH4A-A10-CG	R/F
1/1/2	2	5	5	4…6.3	82	CXDP7-9-10-∗-AH6.3A-A10-RG	R/F	CXDP7-9-10-∗-AH6.3A-A10-CG	R/F
3	3	7-1/2	10	6.3…10	130	CXDP7-12-10-∗-AH10A-A10-RG	R/F	CXDP7-12-10-∗-AH10A-A10-CG	R/F
5	5	10	15	10…16	208	CXDP7-16-10-∗-AH16A-A10-RG	R/F	CXDP7-16-10-∗-AH16A-A10-CG	R/F
5	7-1/2	15	~	14.5…20	260	CXDP7-23-10-∗-AH20A-A10-RG	R/F	CXDP7-23-10-∗-AH20A-A10-CG	R/F
5	7-1/2	15	~	18…25	325	CXDP7-23-10-∗-AH25A-A10-RG	R/F	CXDP7-23-10-∗-AH25A-A10-CG	R/F
KTA7-45H High Interrupting Capacity									
3	3	7-1/2	10	6.3…10	130	CXDP7-30-10-∗-AH10A-A10-RG	R/F	CXDP7-30-10-∗-AH10A-A10-CG	R/F
5	5	10	15	10…16	208	CXDP7-30-10-∗-AH16A-A10-RG	R/F	CXDP7-30-10-∗-AH16A-A10-CG	R/F
5	7-1/2	15	20	14.5…20	260	CXDP7-30-10-∗-AH20A-A10-RG	R/F	CXDP7-30-10-∗-AH20A-A10-CG	R/F
7-1/2	10	20	20	18…25	325	CXDP7-30-10-∗-AH25A-A10-RG	R/F	CXDP7-30-10-∗-AH25A-A10-CG	R/F
7-1/2	10	20	25	23…32	416	CXDP7-30-10-∗-AH32A-A10-RG	R/F	CXDP7-30-10-∗-AH32A-A10-CG	R/F
10	10	25	~	32…45	585	CXDP7-37-10-∗-AH45A-A10-RG	R/F	CXDP7-37-10-∗-AH45A-A10-CG	R/F
10	15	30	~	32…45	585	CXDP7-43-10-∗-AH45A-A10-RG	R/F	CXDP7-43-10-∗-AH45A-A10-CG	R/F

Section Obsolete
See pages F1.56 - F1.88

NOTE: Catalog Numbers listed above and enclosure dimensions reflect contactors with AC coils. Contact factory for DC applications.

R/F - Experience has shown that applications using non-metallic enclosures often require customized pump panels (i.e. Door-in-Door or unique control circuit). Contact your Sprecher + Schuh representative for a customized price.

Contactor AC Coil Codes (∗) ❶

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	**24V**	**24V**
120	**110V**	**120V**
220W	**200-220V**	**208-240V**
277	240V	277V
415 ❷	400-415V	~
480 ❷	**440V**	**480V**
600 ❷	550V	600V

❶ Other voltages available, see Section A in this catalog.

❷ Catalog number (–A10) includes front-mounted auxiliary KT7-PE1-10 with 300 VAC maximum control circuit matching line voltage, or provided from separate source, used to de-energize contactor coil under fault condition (auxiliary not available for customer use). For control circuits greater than 300 VAC, which is common with line voltage, the auxiliary will not be wired into the control circuit since the contactor coil will be de-energized when KTA7 is tripped due to overload or short circuit; therefore, the KT7-PE1-10 auxiliary is available for customer use.

Ordering Instructions

Specify Catalog Number	
Replace (∗) with Coil Code Factory Modifications available	**See this page** **Contact factory**

Custom Multi-Starter Control Panels

From 10 to 100 or more, consult the experts

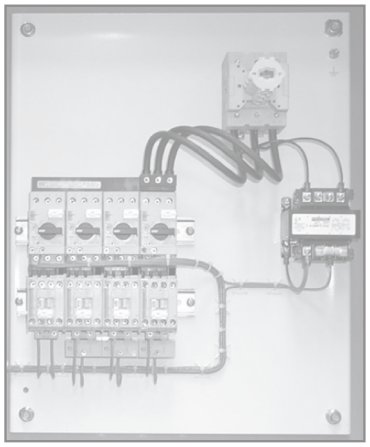

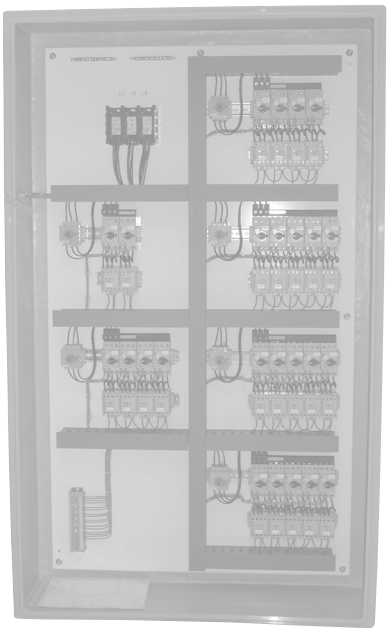

Your Motor Control + Protection Consultant

Sprecher + Schuh's slogan is "Motor control + protection consultant". This means part of our job is to be knowledgeable about these issues and to help customers choose components that not only comply with UL, NEC and CSA standards but also maximizes the SCCR rating of the assembled multi-starter panel, leading to increased protection of equipment and personnel.

Multiple KTA7, KTB7 or KTC7 motor controllers plus matching IEC contactors can be combined in a single assembly as a multi-motor starter custom control panel. Three, six, 133 or more motor controllers and KTU7 molded case circuit breakers, as well as other power components and control circuits, can be designed and assembled into a custom multi-motor starter by Sprecher + Schuh to meet customers' unique application requirements. These pages include a few pictures of custom multi-starter control panels built by Sprecher + Schuh. Contact your Sprecher + Schuh motor control and protection representative for consultation regarding design, quotations, or help explaining the complex UL, NEC and CSA codes that apply to a custom assembly.

For your **Custom application**

contact

customquotes@sprecherschuh.com

Section Obsolete
See pages F1.56 - F1.88

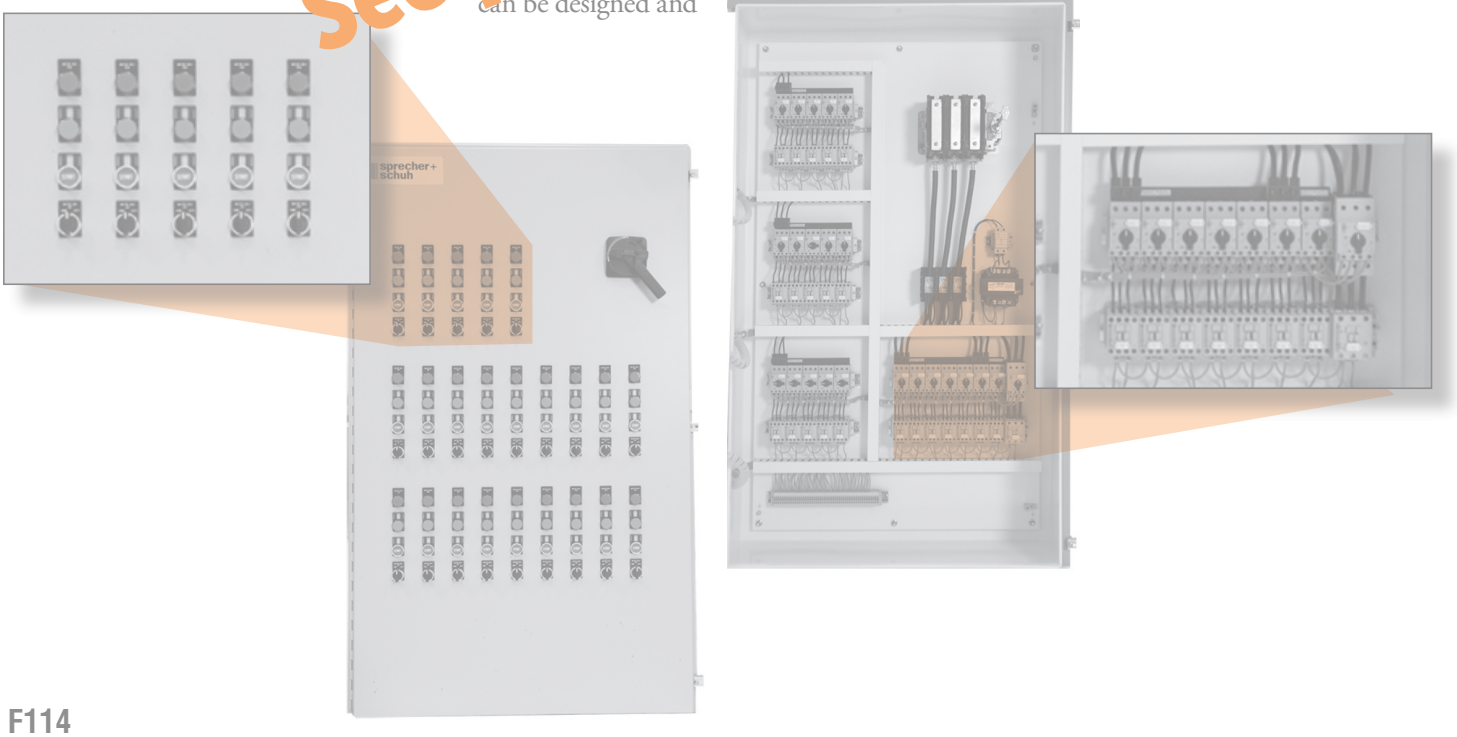

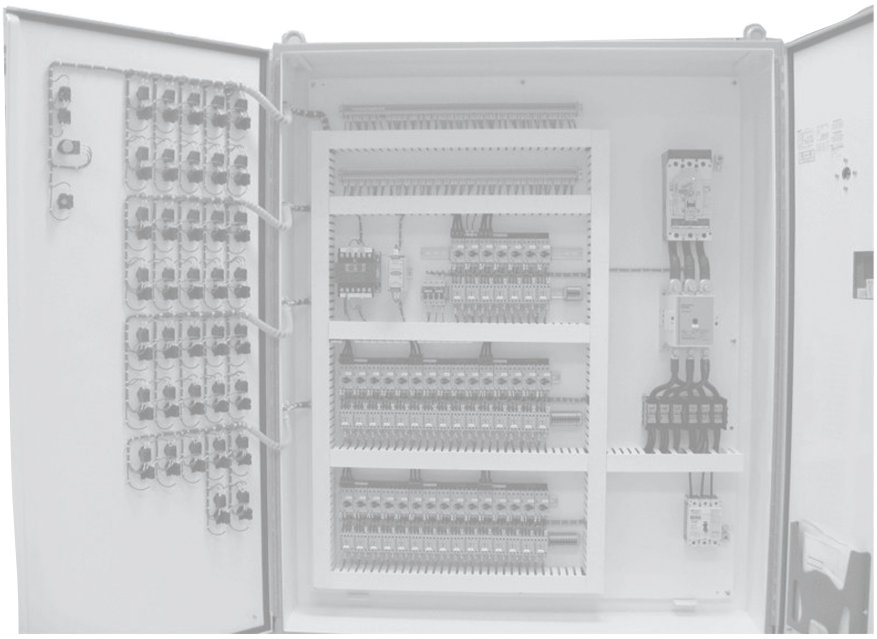

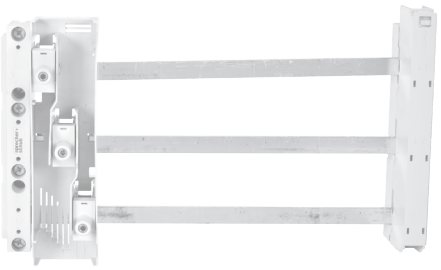

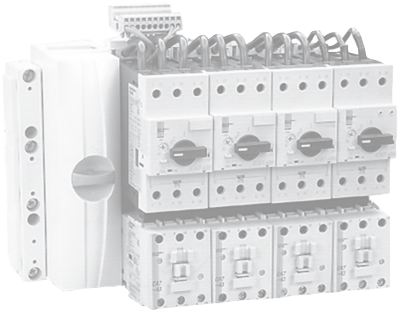

Short Circuit Current Ratings (SSCR)

Short Circuit Current Ratings as defined by UL is a hot topic of discussion within the controls marketplace.

UL 508A Industrial Control Panel specifications require every multiple motor starter panel assembly to be labeled with the Short-Circuit Current Rating (SCCR), which depends on the weakest component's KAIC rating. The SCCR rules are complicated and UL conducts classes around the country on this subject. Sprecher + Schuh conducted a survey of multi-starter panel builders which indicated an increased concern on the part of panel builders to comply with the UL regulations; yet many do not truly understand the complexity of the rules. This is another reason to consult the experts at Sprecher + Schuh.

Section Obsolete
See pages F1.56 - F1.88

3-Phase 60mm Bus Bar System vertically arranged to maximize space

Custom Bus Bar Systems

Sprecher + Schuh has teamed-up with *Wöhner* to supply 3-phase 60 mm bus bar systems. Bus Bar systems offer more flexibility, and a smaller, more economical alternative to a Motor Control Center that uses 'bucket' design.

- Sprecher + Schuh can supply 3-phase 60 mm bus bar components for customer assembly into a control panel.
- We can help design a 3-phase 60 mm bus bar system and provide it with or without components and ship to the customer as open assembly.
- Sprecher + Schuh can help design a 3-phase 60 mm bus bar system and integrate that bus system into an enclosed assembly or multi-starter custom control panel to meet customers' unique specifications.

Please contact your local Sprecher + Schuh Representative or our Technical Support Team to help design our components to meet your needs, which can include building the custom control.

Single, Two and Three Phase Connection Diagram

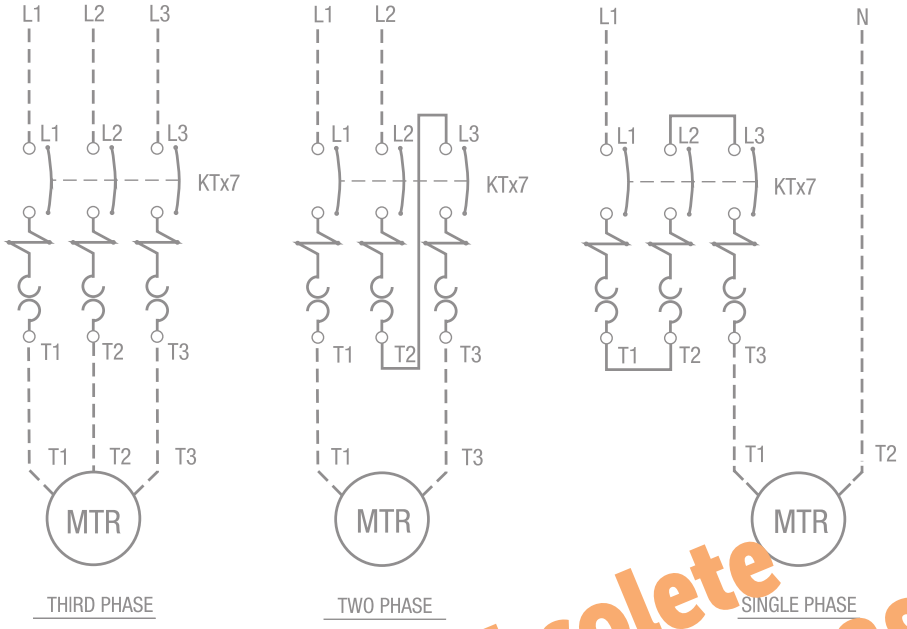

Section Obsolete
See pages F1.56 - F1.88

Type E/F Combination Contr[illegible] Full Voltage Non-Reversing
AC Control[illegible] D7 [illegible]es Pilot Devices

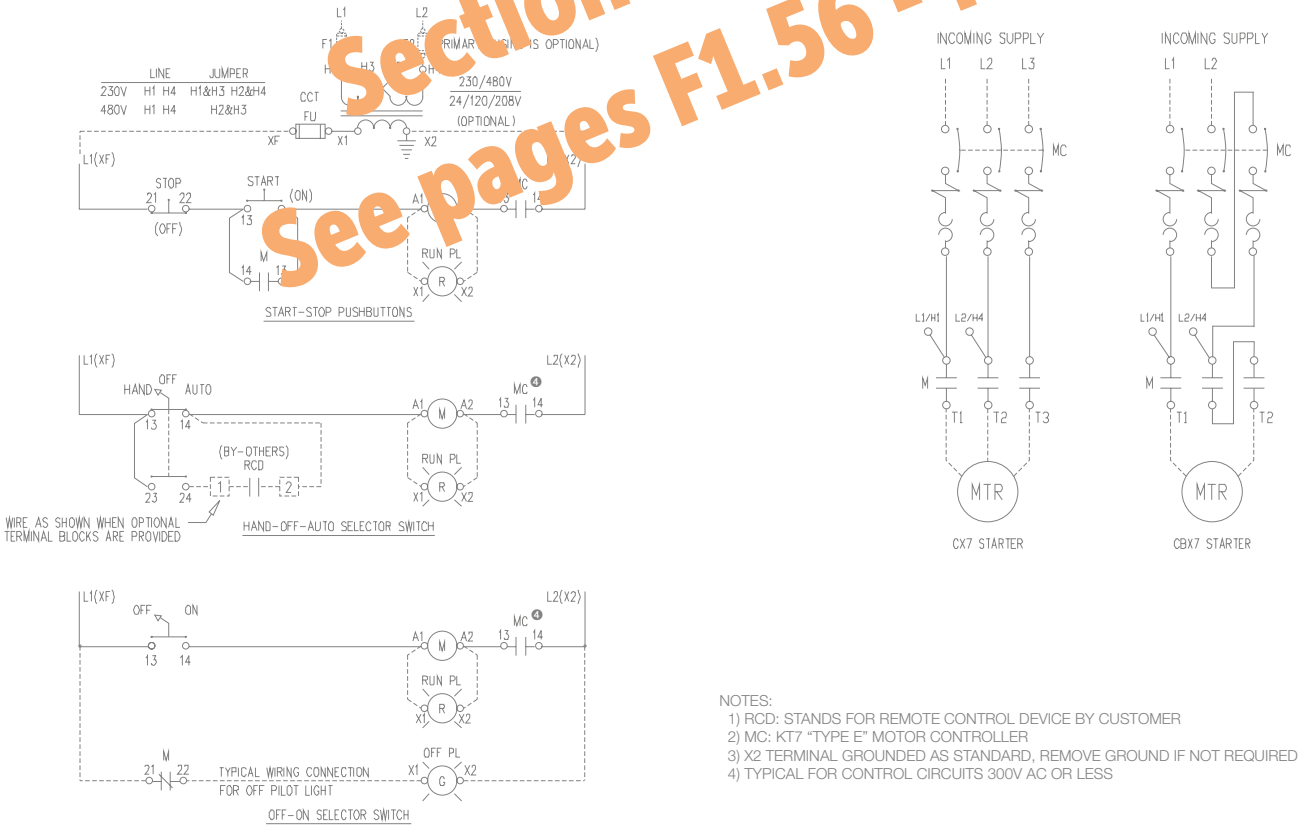

NOTES:
1) RCD: STANDS FOR REMOTE CONTROL DEVICE BY CUSTOMER
2) MC: KT7 "TYPE E" MOTOR CONTROLLER
3) X2 TERMINAL GROUNDED AS STANDARD, REMOVE GROUND IF NOT REQUIRED
4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

KTA7 Type E/F Combination 3-PH FVNR Duplex Alternating Panel
with H-O-A, Lead, Lag and Stop 1-Pole Float Switches

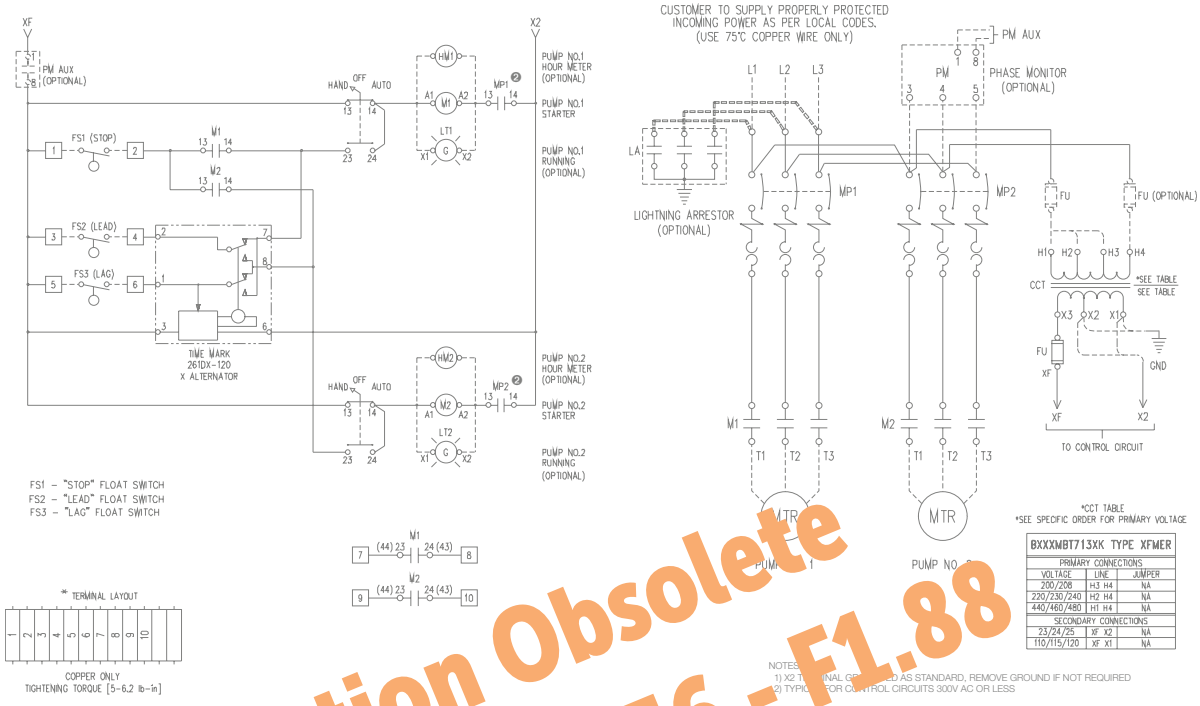

Section Obsolete
See pages F1.56 - F1.88

KTA7 Type E/F Combination 3-PH FVNR Duplex Alternating Panel
with H-O-A, Alarm Circuit, Lead, Lag, Stop, 1-Pole Float Switches

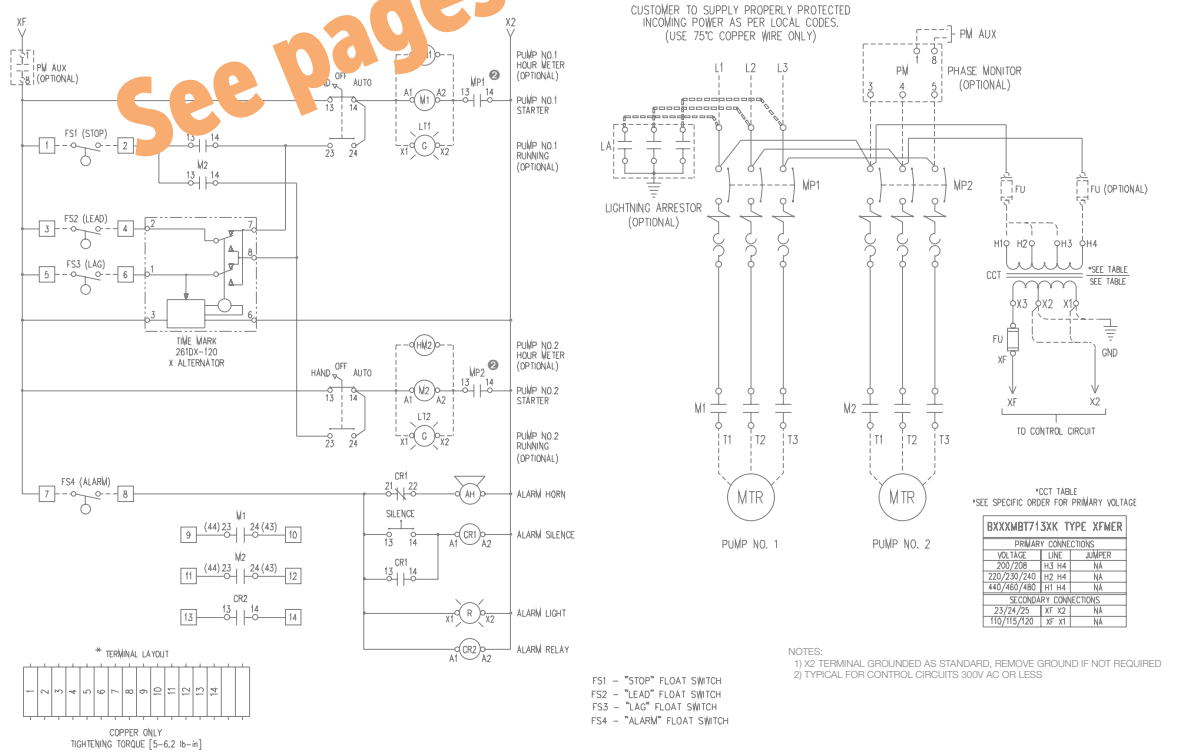

EComboPlus/CX7 KWIKstarters Non-Reversing

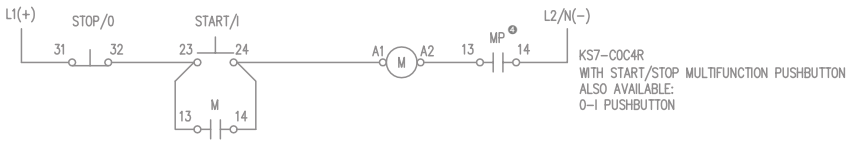



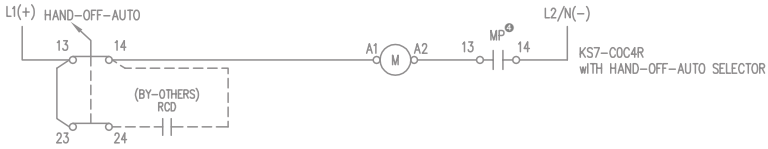





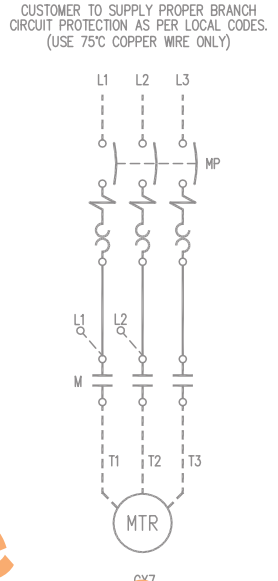

NOTES:
1) MP: KT7 "TYPE E" MOTOR [illegible]
2) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
3) OPTIONAL RUN LIGHT MAY BE RED OR GREEN
4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

Section Obsolete
See pages F1.56 - F1.88

EComboPlus/CXU7 KWIKstarters Reversing

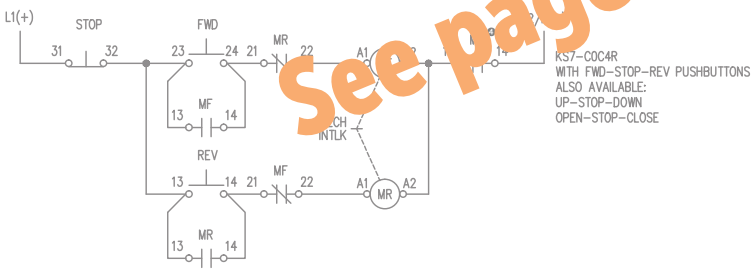

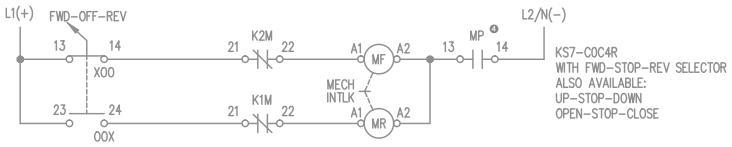



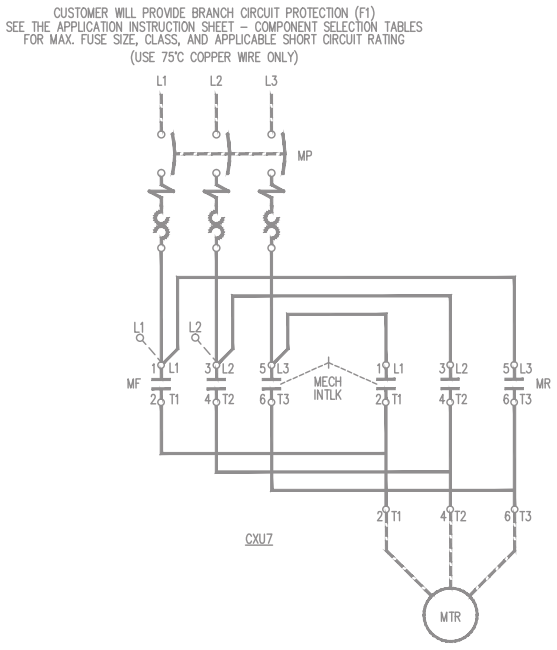

NOTES:
1) MECHANICAL INTERLOCK
2) MP: KT7 "TYPE E" MOTOR CONTROLLER
3) DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE
4) TYPICAL FOR CONTROL CIRCUITS 300V AC OR LESS

CX7/CXU7 KWIKstarter Enclosure KS7-COC4R *(Dimension Code Q4)*

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes.

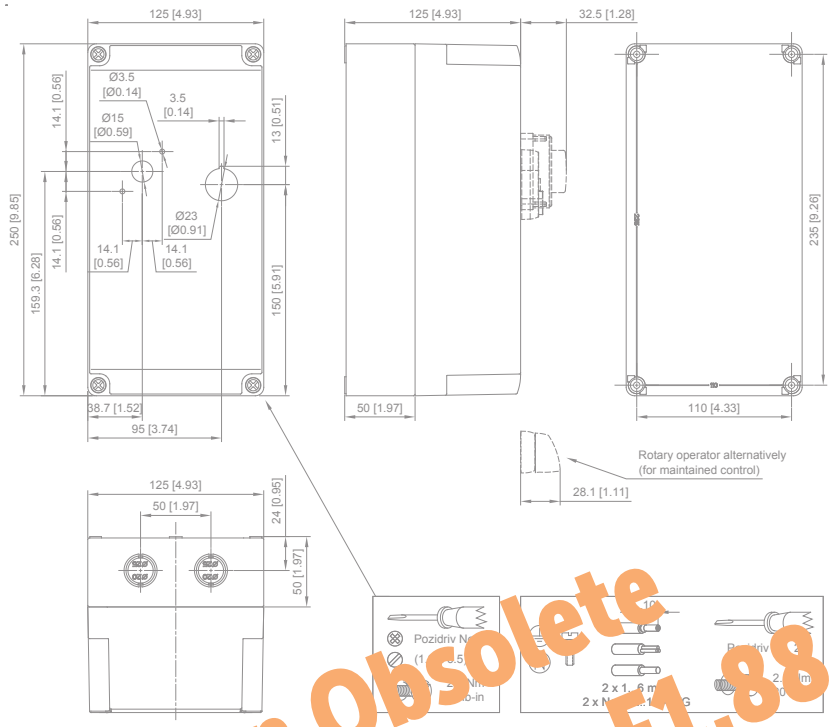

Section Obsolete
See pages F1.56 - F1.88

Enclosure Dimensions

Dimensions are in decimal inches. Dimensions not intended for manufacturing purposes. See dimension drawings on next page.

IP65 ENCLOSURE

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan	
AY	1	5.9	6.04	5.12	N/A	N/A	5.32	N/A	N/A

TYPE-4/4X/12 ENCLOSURE

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan	
Q5	2	7.00	5.03	5.02	4.3	4.21	6.18	N/A	N/A
Q6	3	7.00	7.00	6.02	5.3	6.18	6.18	N/A	N/A
Q7	4	11.87	7.31	10.6	7.23	6.54	11.10	N/A	N/A

TYPE-4/12 & 12 ENCLOSURES

Encl. ID Dim.	Figure No.	Enclosure Size A	B	C	Mtg Depth D	Mtg Centers E	F	Panel Size Sub-Pan		H
W6	5	9.84	7.87	8.24	5.31	5.31	9.13	9.09	7.13	-
W7	5	13.78	11.81	10.2	7.28	9.25	13.07	13.03	11.06	-
L	6	8	6	6	5.53	4	8.75	6.75	4.88	9.5

TYPE 4/7/9 ENCLOSURES

Encl. ID Dim.	Figure No.	Mtg. Dim. A	B	C	Inside Dim. D	Outside Dim. E	F	G	H	Conduit Entry Top & Bot
EX	7	3.25	7.75	3.5	6.0	3.0	4.56	7.06	6.25	0.75
EY	7	5.50	8.50	5.50	5.50	6.0	7.0	7.0	8.84	1.0
EZ	8	9.13	4.50	6.0	8.0	6.63	9.25	11.25	9.34	1.50

Enclosures

See Enclosure Dimension Charts on Previous Page.

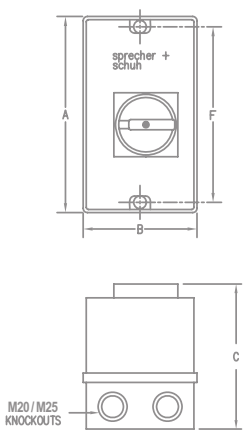

FIGURE NO. 1

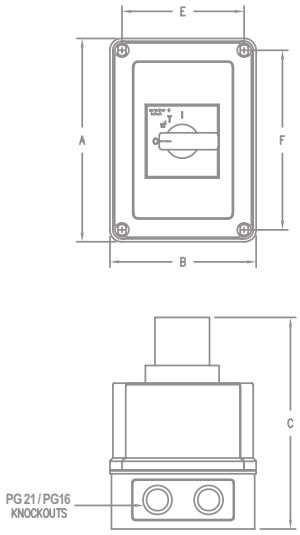

FIGURE NO. 2

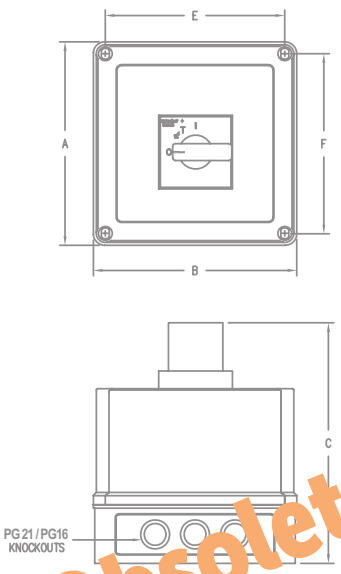

FIGURE NO. 3

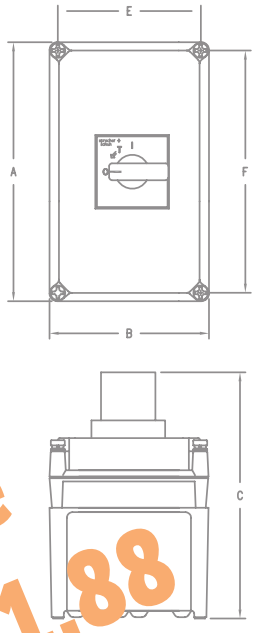

FIGURE NO. 4

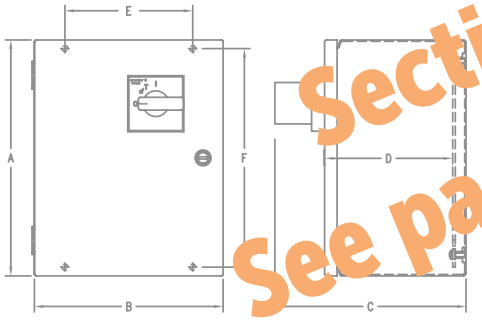

TYPE 4/12
FIGURE NO. 5

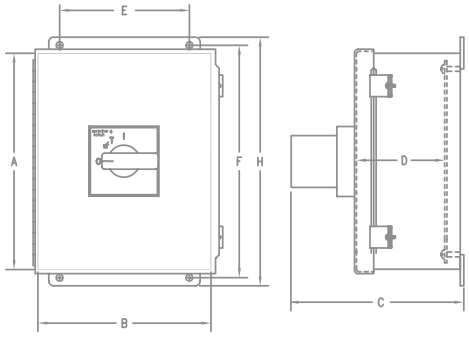

TYPE 12
FIGURE NO. 6





FIGURE NO. 7

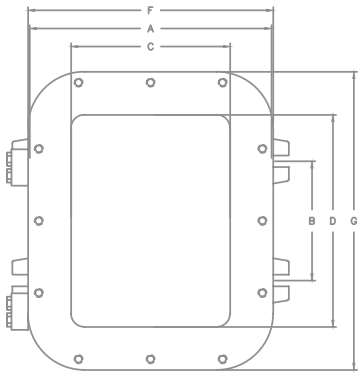

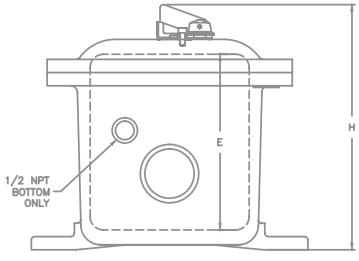

FIGURE NO. 8

Section Obsolete
See pages F1.56 - F1.88

KT4 Manual Motor Starter

DISCONTINUED

Ideal for use as a manual starter

The KT4 is a manual motor starter that employs the features of power switching, thermal overload protection and control circuit signaling in one compact unit. This manual motor starter has the advantage of a high speed magnetic trip mechanism which limits the let-through current under short-circuit conditions. The KT4 can be supplied with field installable shunt trip or an under voltage trip unit which exceeds the capabilities of the classic manual motor starter. This manual motor starter is available in a variety of enclosures including general purpose, watertight and explosion proof (the most compact on the market today).

KT4 Reduces panel space and saves money in Group Motor Installations

The KT4 can eliminate the need for larger and more expensive fuse blocks and fused disconnects, or circuit breakers. The potential cost savings in group motor installations according NEC 430-53c can be as much as 35% over conventional methods of branch circuit protection. And, because so many features are combined into one small unit, panel space can be slashed by as much as 60%.

In addition, the KT4 line offers a wide application range from 0.1 to 16 FLA in installations up to 600V. For group motor applications, the KT4 series has a 250A group installation rating, with a withstand rating as high as 42 KAIC.

Excellent short circuit and thermal overload protection

In the event of a short-circuit, the contacts are opened by magnetic, non-adjusting tripping elements in times approaching 2/1000 of a second. This results in the extremely rapid build-up of an arc voltage which limits the current of the short-circuit to a very low level. Because of this superb current limiting capability the let-through current is significantly reduced and the potential for damage is limited.

Because each KT4 is individually calibrated at the factory for the smallest and largest current, very accurate thermal overload protection is also obtained. In addition, the KT4 is a Class 10 device ... it trips within 10 seconds under a locked rotor condition (6 x FLA). Every KT4 Manual Motor Starter is equipped with automatic ambient temperature compensation, which continually adjusts to surrounding temperatures. As a result, trip times remain constant and accurate.

Accessories add versatility

Whether in group motor installations or as a manual motor starter, numerous field installable accessories are available to enhance the KT4's performance:

- **Auxiliary Contact Blocks** – are available for internal or external mounting providing signal switching capability for control circuits.
- **Shunt trip and Undervoltage Release Modules** – provides the ability to remotely actuate the KT4 in emergency situations or continuously monitor the line voltage.
- **Enclosures** – are available in general protection (IP41), or watertight (IP55), complete with lockable accessories.
- **Compact Bus Bar System** – reduces the task of line side wiring in multiple motor starter installations which reduces the labor cost of installation.

KT4 Manual Motor Starter ❶

Maximum Horsepower ❶❷						O/L Relay Ampere Response ❹	Magnetic Response Current	Ordering Information ❶
Single Ø ❷		Three Ø						
115V	230V	200V	230V	460V	575V			Catalog Number
~	~	~	~	~	~	0.1 - 0.16	1.8	**KT4-C2A-A16**
~	~	~	~	~	~	0.16 - 0.25	2.8	**KT4-C2A-A25**
~	~	~	~	~	~	0.25 - 0.4	4.4	**KT4-C2A-A40**
~	~	~	~	~	~	0.4 - 0.63	6.9	**KT4-C2A-A63**
~	~	~	~	~	1/2	0.63 - 1.0	11	**KT4-C2A-B10**
~	1/10	~	~	1/2	3/4	1.0 - 1.6	18	**KT4-C2A-B16**
1/10	1/6	1/2	1/2	1	1-1/2	1.6 - 2.5	28	**KT4-C2A-B25**
1/8	1/3	3/4	3/4	2	3	2.5 - 4.0	44	**KT4-C2A-B40**
1/4	1/2	1	1-1/2	3	5	4.0 - 6.3	69	**KT4-C2A-B63**
1/2	1-1/2	2	3	5	7-1/2	6.3 - 10	110	**KT4-C2A-C10**
1	2	3	5	10	10	10 - 16	176	**KT4-C2A-C16**

Short Circuit Ratings ❸

Catalog Number	Manual Motor Starter / Group Installation Ratings		
	Short Circuit Rating (kA)		Maximum Branch Circuit Protection Rating ❺
	480V	600V	Amperes
KT4-C2A-A16	42	42	250
KT4-C2A-A25	42	42	250
KT4-C2A-A40	42	42	250
KT4-C2A-A63	42	42	250
KT4-C2A-B10	42	42	250
KT4-C2A-B16	42	42	250
KT4-C2A-B25	42	10	250
KT4-C2A-B40	18	5	250
KT4-C2A-B63	18	5	250
KT4-C2A-C10	10	5	250
KT4-C2A-C16	10	5	250

❶ Horsepower ratings shown are the maximum rating of the switching capacity of the main contactors. **The final selection of the manual starter depends on the actual motor full load amps and service factor.**

Example #1:
For a motor with a service factor of 1.15 or greater, use the motor nameplate full load amps and choose the motor starter with the appropriate current range.

Motor F.L.A.		4.2A
Service Factor		1.15

Select catalog number KT4-C2A-A63 (Range 4.0-6.3 Amps)

Example #2:
For a motor with a service factor less than 1.15, use the motor nameplate full load amps times 0.9 and choose the motor starter with the appropriate current range.

Motor F.L.A.		4.2A
Service Factor		1.0
Multiplier	x	0.9
Effective Current	=	3.78A

Select catalog number KT4-C2A-A40 (Range 2.5-4.0 Amps)

❷ Single phase horsepower ratings are based on wiring the 3 poles of the device in series.

❸ The KT4 motor circuit controller is approved for use in group installation according to NEC 430-53C. Reference Sprecher+Schuh UL file #E54612.

❹ The actual trip current is 120% of the dial setting.

❺ Although UL Testing of Manual Motor Starters allows for Group Installation with upstream Branch Circuit Protection maximum ratings as high as 250 amperes; it should be noted that NEC 2002 contains new restrictions under NEC 430-53D "Single Motor Taps". KT4 should be applied as outlined in NEC 430-53D-1 or 430-53-D-2 to be in compliance. KT4 does not qualify as "Tap Conductor Protection" as required under NEC 430-53-D-3. Please refer to the Application notes located at the end of the KT7 section for more details on compliance.

Accessories for KT4

Accessory	Description	Wiring Diagram	Catalog Number
	Auxiliary Contact Block (NO) - mounts internally.		**KT4-C-AEA10**
	Auxiliary Contact Block (NO) - mounts internally, terminal markings appropriate when also using "PA" type auxiliary contact.		**KT4-C-AEA210**
	Auxiliary Contact Block (NC) - mounts internally.		**KT4-C-AEA01**
	Auxiliary Contact Block (NC) - mounts internally, terminal markings appropriate when also using "PA" type auxiliary contact.		**KT4-C-AEA201**
	**Two pole Auxiliary Contact Block (NO/NC) -** for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing		**KT4-C-ASA11**
	Two pole Auxiliary Contact Block - (NO/NO) - for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing.		**KT4-C-ASA20**
	Two pole Auxiliary Contact Block - (NC/NC) - for side mounting. If using Compact Bus Bar System, choose bus bar with 54mm spacing.		**KT4-C-ASA02**

Accessory	Description	Catalog Number
	**Adaptor Plate** Provides capability to base mount one KT4	**KT4-C-N12**
	**Locking Fixture** Padlocking attachment for one KT4-25. Locks in the OFF position only. Metal construction. Holds one to three padlocks with 6mm hasps.	**KT4-C-M3**

Accessories for KT4 *(continued from previous page)*

Accessory	Description	Wiring Diagram	AC Coil Voltage		Catalog Number
			50 HZ	60 HZ	
	Undervoltage Release Module - mounts on right hand side, Prevents KT4 from operating unless voltage is present.		24V	~	**KT4-C-UXK**
			~	24V	**KT4-C-UXJ**
			~	48V	**KT4-C-UXX**
			110V	110V	**KT4-C-UXKD**
			110V	**120V**	**KT4-C-UXD**
			220…230V	240…260V	**KT4-C-UXF**
			~	240…260V	**KT4-C-UXA**
			240V	277V	**KT4-C-UXT**
			400V	460V	**KT4-C-UXN**
			415V	**480V**	**KT4-C-UXB**
			500V	575V	**KT4-C-UXM**
	Shunt Release Module - mounts on right hand side. Remotely trips the KT4 .		24V	~	**KT4-C-SXK**
			~	24V	**KT4-C-SXJ**
			~	48V	**KT4-C-SXX**
			110V	110V	**KT4-C-SXKD**
			110V	120V	**KT4-C-SXD**
			220…230V	240…260V	**KT4-C-SXF**
			~	240…260V	**KT4-C-SXA**
			240V	277V	**KT4-C-SXT**
			400V	460V	**KT4-C-SXN**
			415V	480V	**KT4-C-SXB**
			500V	575V	**KT4-C-SXM**

Accessory	Description	Voltage / Rated Current	Catalog Number
	Connecting Module ❶- Provides a solid "wireless" connection between a KT4 Motor Circuit Controller and a CA7 contactor. Connects CA7-9…23	20A	**KT4-C-PNC23**

❶ cULus Approved (File E33916).

Accessories for KT4 *(continued from previous page)*

Accessory	Description	Enclosure Rating	Catalog No. ❶
KT4-C-EA55	**Enclosures for Surface Mounting** - Includes ground and neutral terminals.	General Purpose (IP41)	**KT4-C-EA41**
		Watertight (IP55)	**KT4-C-EA55**
KT4-C-EE55	**Enclosure for Flush Mounting** - includes protective earth and neutral wire terminals.	General Purpose (IP41)	**KT4-C-EE41**
		Watertight (IP55)	**KT4-C-EE55**
	**Enclosure Locking Fixture** - Holds one to three padlocks with 6mm hasps.	For use with KT4-C-EA41 and KT4-C-EA55 enclosures	**KT4-C-M3E**
	Enclosure Membrane - Replacement membrane. Includes 4 mounting screws (membrane only, does not include mounting frame).	For replacement on KT4-C-EA55 or -EE55 or to upgrade KT4-C-EA41 or -EE41 enclosures	**KT4-C-N55**

Accessory	Description	Kit Catalog No.	For Use With	Assembled Cat No. ❶
KT4-C-MT-EA55	**Emergency Stop Kit Twist-To-Release**	**KT4-C-MT**	KT4-C-EA41	**KT4-C-MT-EA41**
			KT4-C-EE41	**KT4-C-MT-EE41**
			KT4-C-EA55	**KT4-C-MT-EA55**
			KT4-C-EE55	**KT4-C-MT-EE55**
KT4-C-MK-EA55	**Emergency Stop Kit Key Release**	**KT4-C-MK**	KT4-C-EA41	**KT4-C-MK-EA41**
			KT4-C-EE41	**KT4-C-MK-EE41**
			KT4-C-EA55	**KT4-C-MK-EA55**
			KT4-C-EE55	**KT4-C-MK-EE55**

❶ KT4 Manual Motor Starter Not Included. Consult a Sprecher + Schuh representative for an assembly including a KT4.

Compact Bus Bar System for KT4

Accessory	Description	Catalog Number
	**Compact Bus Bar - 45mm spacing** - Bus bar with 45mm spacing accepts KT4's with *or without* internally mounted auxiliary or trip signal contact. Rated to 65A (UL)/63A (IEC). Connects two KT4's Connects three KT4's Connects four KT4's Connects five KT4's	 **KT4-C-W452** **KT4-C-W453** **KT4-C-W454** **KT4-C-W455**
	**Compact Bus Bar - 54mm spacing** - Bus bar with 54mm spacing accepts KT4's with side mounted auxiliary contact (type PA-11). Rated to 65A (UL)/63A (IEC). Connects two KT4's Connects three KT4's Connects four KT4's Connects five KT4's	 **KT4-C-W542** **KT4-C-W543** **KT4-C-W544** **KT4-C-W545**
	**Supply Block** - Provides connection from bus bar to power.	**KT4-C-WT**
	Blank Space Cover - Covers bus bar connections where no KT4 is mounted.	**KT4-C-WS**

Technical Information

		KT4…
Standards Approvals		UL 508; CSA22.2; EN/IEC 60947-1/-2/-4/-5-1/ UL, CSA, CE, SEV, Germ. Lloyd, CEBEC, PTB, DEMKO, SEMKO, SETI, NEMKO, Bureau Veritas, Lloyd's Register of Shipping, Maritime Register of Shipping, RINA, KEMA
Approvals / Markings		CE, cULus Listed
Rated Insulation Voltage		
IEC, SEV, VDE0660	[V]	690
UL, CSA	[V]	600
Rated Impulse Withstand Voltage		
Main circuits		6 kV
Auxiliary circuits		6 kV
Rated Frequency	[Hz]	40…60
Rated Operating Current	[A]	0.1…16 (11 ranges)
Life		
Mechanical	[operations]	100,000
Electrical	[operations]	50,000
Switching Frequency		Max. 30 operating cycles/hour
Ambient Temperature		
Storage		-25°C to +80°C
Operation		-25°C to +60°C
Resistance to climatic change		
Humid heat		40°C, 92%, 56 days
Alternating climatic conditions		23°C, 83%/40°C, 93%, 56 cycles
Degree of Protection		IP20 (when wired)
Impact Resistance (shock)		50g, 11ms
Vibration Strength		
Frequency Range		10…150Hz
In all directions		>7.5g
Overload Protection		
Tripping Time		Class 10
Phase failure protection		See time/current curve
Temperature Compensation		-20°C… +60°C (70°C=15% current reduction of upper rated current)
Magnetic Response		11 x *I*e max. (fixed setting) (*I*e max. = max value of the setting range)
Total Power dissipation		
Manual motor starter at rated load	[W]	7
Terminal Connections		
Type of terminals		
Screwdriver		Position No. 2/Blade No. 3
	1. conductor 2. conductor	1 to 4 mm² / 16 to 12 AWG 1 to 4 mm² / 16 to 12 AWG
	1. conductor 2. conductor	1 to 6 mm² / 16 to 12 AWG 1 to 6 mm² / 16 to 12 AWG
	1. conductor 2. conductor	1.5 to 6 mm² / 16 to 12 AWG 1.5 to 6 mm² / 16 to 12 AWG
Tightening torque		2 to 2.5 Nm / 18 to 22 fb-in

Mounting Position - KT4

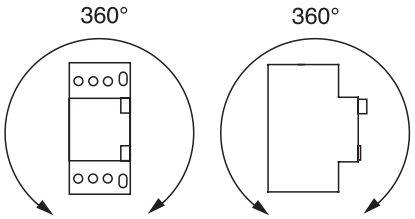

Weights

Description	Catalog Number	Weight
Manual Motor Starter	KT4-C2A...	290 g
Auxiliary Contact Blocks for Flush Mounting	KT4-C-AEA	12 g
Auxiliary Contact Blocks for Left-side Mounting	KT4-C-ASA	35 g
Undervoltage Release	KT4-C-UX	104 g
Shunt Release	KT4-C-SX	100 g
Bus Bar Feeder Terminal	KT4-C-WT	36 g
Compact Bus Bar	KT4-C-W452	42 g
	KT4-C-W453	69 g
	KT4-C-W454	94 g
	KT4-C-W455	119 g
	KT4-C-W542	45 g
	KT4-C-W543	76 g
	KT4-C-W545	104 g
	KT4-C-W545	135 g
Blank Space Cover	KT4-C-WS	3.3 g
Emergency-Stop Push Button	KT4-C-MT	g
	KT4-C-MK	g
Enclosure for Surface Mounting	KT4-C-EA41	250 g
Enclosure for Flush Mounting	KT4-C-EA55	258 g
Button Membrane	KT4-C-EE41	126 g
	KT4-C-EE55	134 g
Indicator Light	KT4-L...	10 g
Hut (DIN) rail Adapter	KT4-C-N12	16 g
	KT4-C-M3E	19 g
Locking Arrangement	KT4-C-M3	11 g

Technical Information

Specifications of Accessories		KT4-C-AEA... Auxiliary Contact Block for Flush Mounting				KT4-C-ASA... Auxiliary Contact Block for Left-side Mounting			
Rated Thermal Current I_{th}									
at 40°C ambient temperature	[A]	6				10			
at 60°C ambient temperature	[A]	4				6			
Contact Class Coordination According to NEMA									
(UL/CSA Standards)	[AC]	B 600 Standard Pilot Duty				B 600 Standard Pilot Duty			
	[DC]	R 300 Light Pilot Duty				R 300 Light Pilot Duty			
Back-Up Fuses gG, gL	**[A]**	**16**				**16**			
Rated Supply current	[V]	230/240	400/415	500	690	230/240	400/415	500	690
AC-15	[A]	2	1	0.8	0.5	2	1	0.8	0.5
DC-13	[V]	24	48	110	220	24	48	110	220
	[A]	2	0.6	0.2	0.1	2	0.6	0.2	0.1
Terminal Parts									
Type of terminals									
Screwdriver		Pozidrive No. 2 / Blade No. 3							
 1. conductor		0.75 to 2.5 mm2 / 18 to 14 AWG				0.75 to 2.5 mm2 / 18 to 14 AWG			
2. conductor		0.75 to 2.5 mm2 / 18 to 14 AWG				0.75 to 2.5 mm2 / 18 to 14 AWG			
1. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
2. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
1. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
2. conductor		0.75 to 4 mm2 / 18 to 14 AWG				0.75 to 4 mm2 / 18 to 14 AWG			
Tightening torque		1 to 1.5 Nm / 9 to 13 fb-in				1 to 1.5 Nm / 9 to 13 fb-in			

		KT4-C-UX... Undervoltage Release Unit for Right-side Mounting	KT4-C-SX... Shunt Release for Right-side Mounting	KT4-C-WT Supply Block
Actuating Voltage				
Pull-in		0.8 to 1.1 x U_s	0.7 to 1.1 x U_s	
Drop-out		0.7 to 0.35 x U_s	~	
Rated Control Voltage	min.	12V 50 Hz, 14V 60 Hz	12V 50 Hz, 14V 60 Hz	
	max.	600V 50 Hz	600V 50 Hz	
On-Time		100 %	100%	
Coil Rating	Pull-in	8.5 VA, 6 W	8.5 VA, 6 W	
	Hold	3 VA, 1.2 W	3 VA, 1.2 W	
Terminal Parts				
Type of terminals				
Screwdriver		Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3	Pozidrive No. 2/Blade No. 3
 1. conductor		0.75 to 2.5 mm² / 18 to 14 AWG	0.75 to 2.5 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
2. conductor		0.75 to 2.5 mm² / 18 to 14 AWG	0.75 to 2.5 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
1. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
2. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
1. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
2. conductor		0.75 to 4 mm² / 18 to 14 AWG	0.75 to 4 mm² / 18 to 14 AWG	4 to 16 mm² / 14 to 6 AWG
Tightening torque		1 to 1.5 Nm / 9 to 13 fb-in	1 to 1.5 Nm / 9 to 13 fb-in	4 Nm / 36 fb-in

		KT4-C-W45... Compact Bus Bar	KT4-C-W54... Compact Bus Bar
Rated Insulation Voltage U_i	[V]	690	690
Rated Thermal Current I_{th}	[A}	63	63

		KT4-C-EA41 / -EE41 Enclosure	KT4-C-EA55 / -EE55 Enclosure	KT4-C-L... Indicator Light
IP Protection		IP41	IP55 (with seal and protective membrane)	IP54
Ambient Temperature	[°C]	- 25...+ 40	- 25...+ 40	~
Rated Operating Voltage	[V]	~	~	120, 240, 415, 480

IEC Performance Data (KT4-C2A)

		-A16	-A25	-A40	-A63	-B10	-B16	-B25	-B40	-B63	-C10	-C16
Switching of standard three phase motors												
AC-2, AC-3												
230/240V	[kW]	~	~	~	0.06/0.09	0.12	0.18/0.25	0.37	0.55/0.75	1.1/1.5	2.2	3.0/4.0
400/415V	[kW]	0.02	0.06	0.09	0.18/.25	0.25	0.37/0.55	.75	1.1/1.5	2.2	3.0/4.0	5.5/7.5
500V	[kW]	~	~	~	0.18	0.25/0.37	0.55/0.75	1.1	1.5/2.2	2.5/3.0	4.0/6.3	7.5/10
690V	[kW]	~	~	~	0.25	0.37/0.55	0.75/1.1	1.8	2.2/3.0	~	~	~
Back-up fuses												
gG, aM, only if /cc > /cu												
230/240V	[A]	No Fuses Required						~	~	~	~	50
400/415V	[A]							~	~	~	63	50
500V	[A]							~	~	63	50	50
690V	[A]							25	35	~	~	~
Ultimate short-circuit breaking capacity /cu												
230/240V	[kA]	65	65	65	65	65	65	50	50	50	50	3
400/415V	[kA]	65	65	65	65	65	65	50	10	10	8	6
500V	[kA]	50	50	50	50	50	50	50	3	10	4.5	4.5
690V	[kA]	50	50	50	50	50	50	4.5	2	~	~	~

CSA Performance Data (KT4-C2A)

		-A16	-A25	-A40	-A63	-B10	-B16	-B25	-B40	-B63	-C10	-C16
Maximum short-circuit current												
480V	[kA]	42	42	42	42	42	42	42	18	18	10	5
600V	[kA]	42	42	42	42	42	42	10	5	5	5	5
Motor load												
1-phase												
115V	[HP]	~	~	~	~	~	~	1/10	1/8	1/4	1/2	1
230V	[HP]	~	~	~	~	~	1/10	1/6	1/3	3/4	1 1/2	3
3-phase												
200V	[HP]	~	~	~	~	~	~	1/2	3/4	1 1/2	2	3
230V	[HP]	~	~	~	~	~	~	3/4	1	2	3	5
460V	[HP]	~	~	~	~	1/2	1	1 1/2	3	5	7 1/2	10
575V	[HP]	~	~	~	~	3/4	1	2	3	5	10	15

Auxiliary Contact & Trip Indicator Contact Development ❶

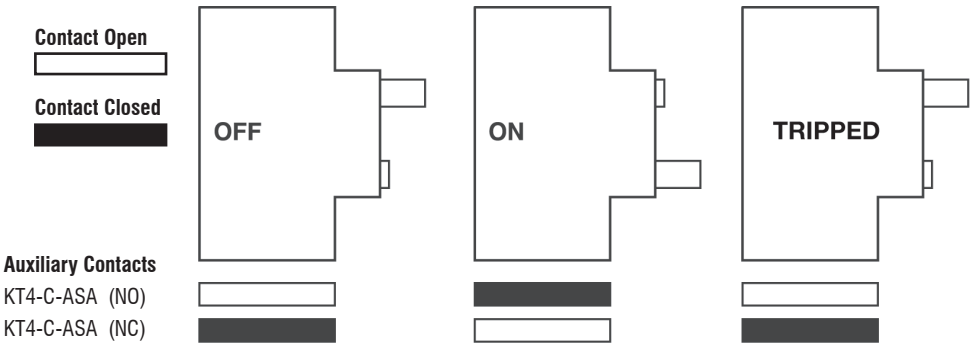

❶ KT4 leaves the factory in the Auto Reset mode. This means the Off and Trip positions are the same. If a true trip position is required, consult your Sprecher + Schuh representative.

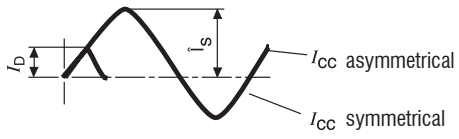

KT4-C2A
Max. Let-Through (cut-off) Current, U_e = 400...415V

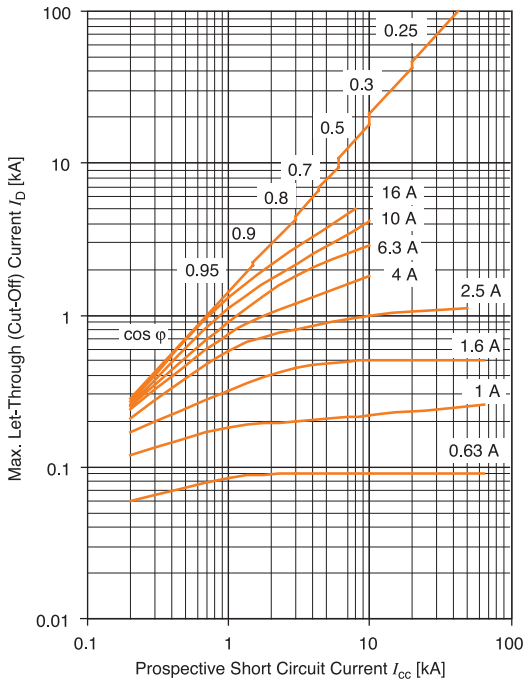

KT4-C2A
Time / current characteristics

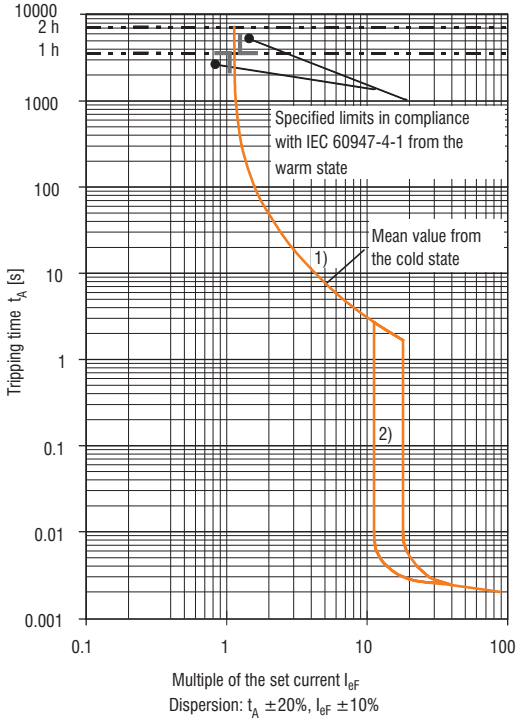

Dispersion: t_A ±20%, I_{eF} ±10%

The KT4-C2A manual motor starter limits short-circuit current I_{cc} (prospective short-circuit current). I_D is the maximum cut-off current (highest instantaneous value of the limited short-circuit current). This value is indicated in the following diagram as a function of the system short-circuit current.

Correspondingly the maximum forward j^2 dt energy is limited. This value is indicated in the following diagram as a function of the system short-circuited current.

KT4-C2A
Max. Let-Through Energy, U_e = 400...415V

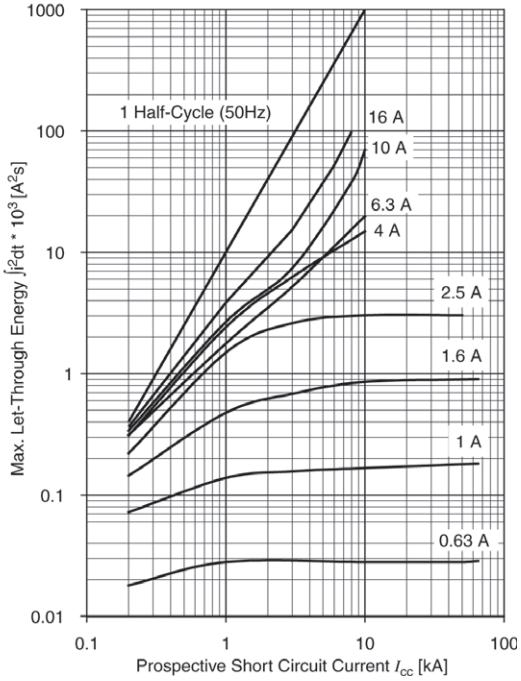

1) Operating Current of Thermal Releases:
The adjustable inverse bimetal trip reliability protects motors against overloads. The curve shows the mean operating current at an ambient temperature of 20°C starting from cold.

In equipment at operating temperature, release time is less than or equal to release time from the cold state.

2) Operating Current of Magnetic Releases:
Electromagnetic instantaneous releases react at a fixed tripping current.

At the upper thermal release setting, this tripping current is 11 times the set cur rent.

Current To Be Set:
Thermal releases meet the requirements for a thermal release of a starter in accordance with IEC 60947-4-1 f. If a different value is specified (such as reduced I_e in motors with an ambient temperature higher than 40°C or a site altitude >2000 m above sea level), the rated operating current I_e must be adjusted.

Single, Two and Three Phase Connection Diagram

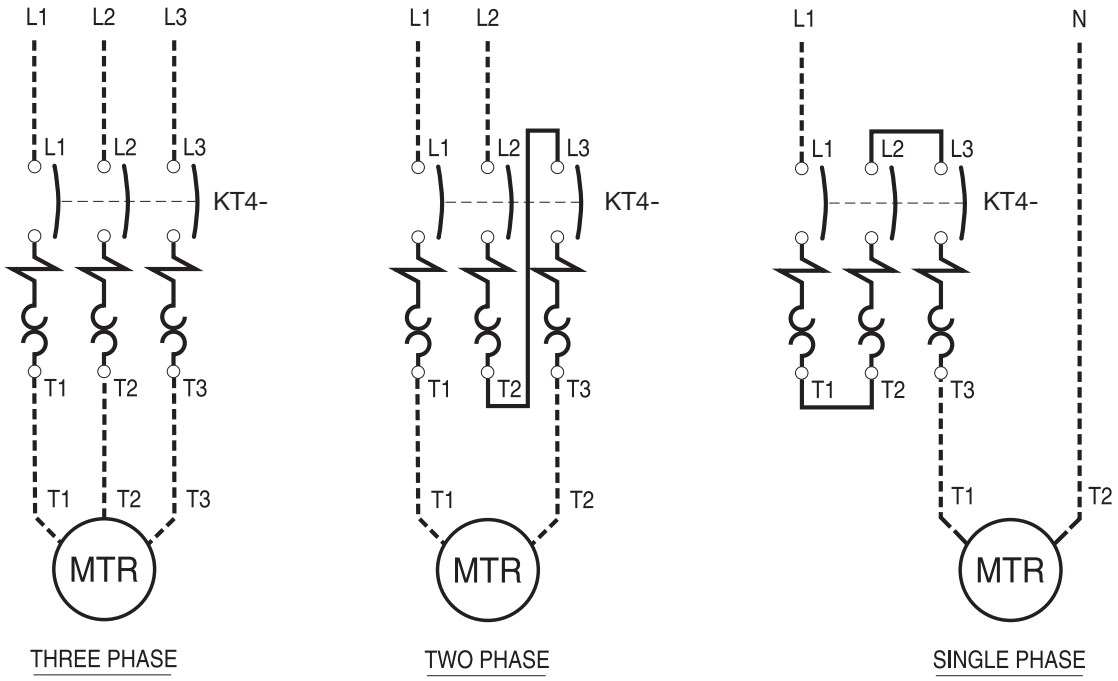

Dimensions are in millimeters (except where noted). Dimensions not intended for manufacturing purposes.

KT4 Motor Circuit Controller

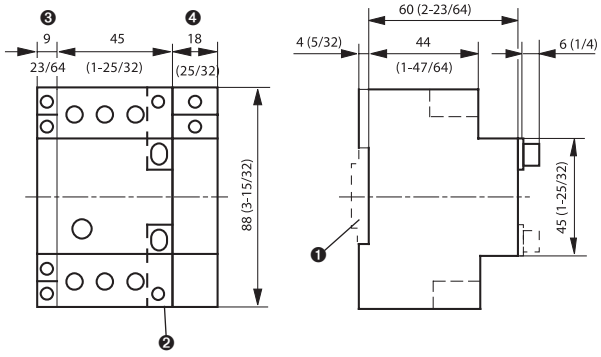

KT4 with Compact Bus Bar

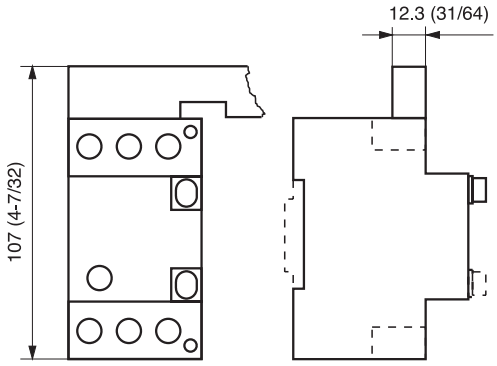

❶ DIN rail (EN 50022-35)
❷ KT4 w/KT4-C-AEA (no dimension change)
❸ KT4-C-ASA
❹ KT4-C-SXB or KT4-C-UXA

KT4-C-WT

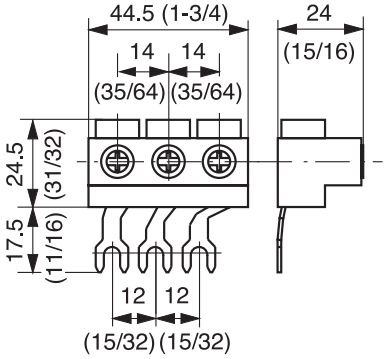

KT4-C2A with KT4-C-WT

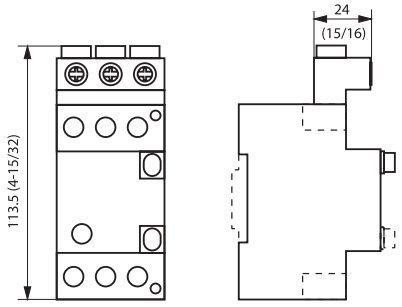

KT4-C-N12



KT4-C-EA55 Enclosure

Dimensions are in millimeters (except where noted). Dimensions not intended for manufacturing purposes.

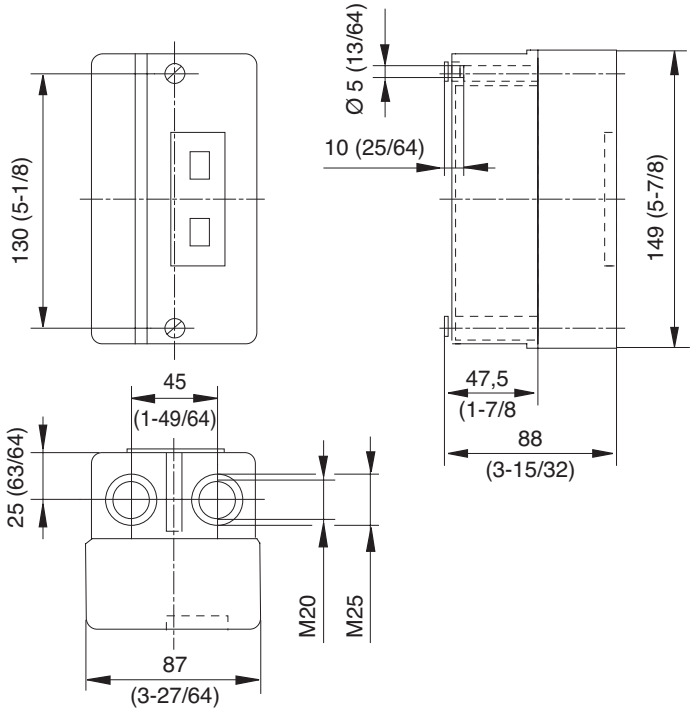

KT4-C-EE41 Enclosure

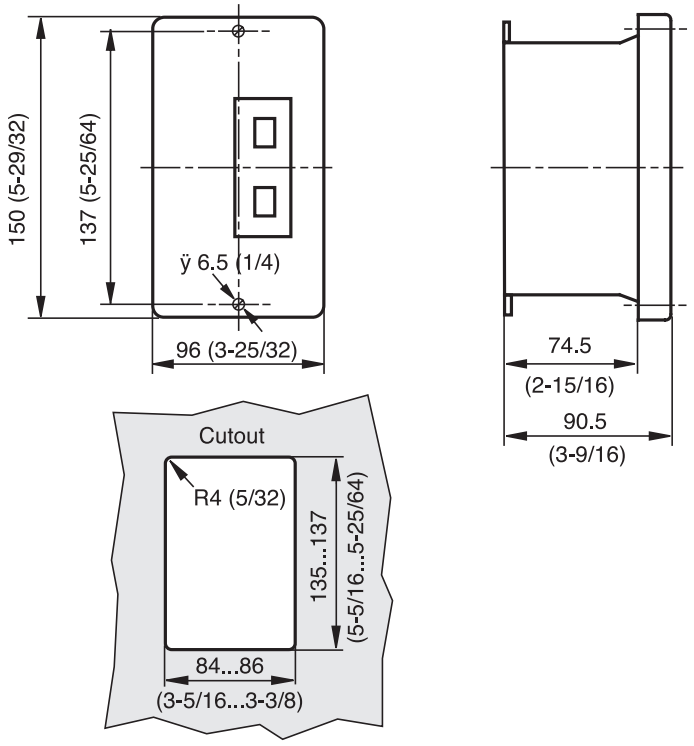

Notes